SPX®

Power Team

ABOUT POWER TEAM

Tough Products for Tough Applications

Hydraulic Pumps
- Electric and Air Powered
- Electric, Air, and Gas Powered
- Hand Pumps
- Valves, Hoses and Accessories

Hydraulic Cylinders
- Rams
- Standard
- Construction
- Industrial
- High Tonnage
- Pancake
- Aluminum
- Pulling

Jacks
- Lifting Jacks
- Inflatable Jacks
- Post-Tensioning Jacks

Tools
- Hydraulic Presses
- Flange Spreaders
- Nut Splitters
- Gear Pushers/Pullers
- Bearing Maintenance Pushers/Pullers

Shop Equipment
- Shop Presses
- Floor Cranes
- Spread Tilters

Power Team. 90 years experience in supplying Professional Grade high-pressure Hydraulic Pumps, Cylinders, Jacks, Pullers & Tools.

A Heritage of Innovation

Since 1924, we've been instrumental in the development of innovative high force hydraulic power products, systems and tools. And many of our products are known as the industry standard for rugged construction, reliability, and long service life. Today, we provide a full range of professional grade products and services around the globe.

Power Team Quality

Power Team Products are built tough with strict ISO 9001 manufacturing processes and are covered by a Lifetime Powerthon Warranty*.

Global Distribution and Service

Wherever your job is in the world, the Power Team network of distributors and service centers assures local product, parts and service availability.

*See Warranty page for coverage details.

VALVES

PUMP MOUNTED VALVES...50-57

REMOTE MOUNTED AND IN LINE VALVES...129-131

CYLINDERS 12-41

PUMPS 42-119

HYDRAULIC ACCESSORIES 120-133

SHOP EQUIPMENT 134-147

JACKS 148-163

HYDRAULIC AND MECHANICAL TOOLS 164-189

PULLERS 190-230

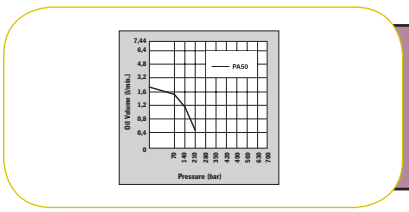

RESOURCES 231-236

Index
NUMERICAL

BB1600 178
BC212 - BC212EUR 81
BP12INT 81
C12-HTR-C,
C12-TON-B, C12-HHT-B,
C51C - C10010C 17
C55CBT -
C2514CBT 18
CB30 - CB100 40
CBS55 - CBS150 162
CC5 - CC25 177
DG100, DG100B 125
FC2200 - FC4400 146
FLS15 180-181
FK59 - FK159B 60
HFS3A - HFS6A 175
HB443, HB444 110
HNS150 - HNS225 174
HP20 - HP35SP 182-183
HS2000 - HS3000 176
HST11 215
HST11S 214
HT50A - HT200 184
HTS50 188
IM10E, IM10H 156
IJ13T - IJ7520T 158
IPS10B,
IPS10HB 209
IPS10M,
IPS17M 212
IPS17 - IPS17H 220
IPS30H 221
IPS3017-IPS3017B 222
IPS5017- IPS5017B 223
IPS5317 224
J24T - J259T 152-153
JAM10033 -
JEM15026 163
K82, K83 211
LR2000 - LR6000 147
MB5 - MB16 213
MCS 166
MIT-B 178
P12 - P59F 58-59
P19, P59 59
P157 - P460D 60
PA6 - PA6DM-2 62-65
PA7 206
PA9, PA9H 66-67
PA50 - PA50RM 70-71
PA60, PA64 68-69
PA172 - PA554 72-75
PB1230C -
PB51156C 213
PC200, PC200RC 119
PCHE60A1BA-4 -
PCHA120A1BA-4 170
PD313 - PD812 183
PE-NUT 104, 180
PE102 -
PE104 80-81
PE120M 112
PE172 - PE174M 82-83
PE18 84-85
PE182 -
PE184C 84-85
PE213 - PE214S 86-87
PE302 -
PE304R-2 90-91
PE30TWP 171
PE55TWP-
PE55TWP4 172
PE462 - PE464S 92-93
PE552 - PE554T 94-95
PE604T -
PE604PT 96-97
PE4004,
PE4004S 102-103
PED253 -
PED254S 88-89
PG120HM 108
PG303 - PG554 106-107
PG1200M-4 -
PG1204S 108-109
PG4004,
PG4004S 108-109
PH53C,
PH53CR 216
PH63C - PH113C 214
PH103C, PH103CR 216
PH172 - PH503 217
PH553C -
PH553CL13 226
PH1002 - PH1002J 227
PLA6014 -
PLE6014K 161
PMA, PUA 76-79
PMA55 - PME55S 163
PPH17 -
PPH50R 218, 219
PTPHB-206 -
PTPHD-216 196
PTPH-102T-
PTPH-200T 197
PQ603 -
PQ1204S 98-103
PR102 - PR104 80-81
PR2100J Thru
PR3100S 230-231
PT202-PT116 197
PTPH-206-
PTPHA-116 197
R552C - R56510C 28
PTPHB-206-
PTPHD-216 198
PTPH-102T-
PTPH-200T 199
R1002D - R56510D 30
R552L - R56510L 31
RA202 - RA1006 17
RA556L, RA1006L 32
RB8013S -
RB20013S 133
RC5 119
RC12V 81
RD106 - RD50013 27
RH102 -
RH2008 23
RH306D 23
RHA306 22
RHA604D 23
RH121T 22
RLS50 - RLS1500S 20
RP20 - RP104 119
RP25, RP55 25
RPS55 - RPS556A 61
RSS101 - RSS2503 21
RT172 - RT1004 24
RV21278 -
RV21278-90 133
RWP55 173
SF50 139, 142
SF150 140-142
SJ2010 - SJ3010P 157
SP1010A 137
SPA10 - SPA200 145
SPA256, SPA2514 138
SPA556 139
SPE1010,
SPE1010D 137
SPE256 -
SPE2514DS 138
SPE556 -
SPE5513DS 139
SPE10010 -
SPE10013DS 140
SPE10010R 140
SPE15013DS -
SPE20013DS 141
SPH1010 137
SPM1010 137
SPM256 138
SPM256C 136
SPM2514 138
SPM556,
SPM5513 139
SPM10010 140
SS2 206
TBP1622 144
TPP1-TPP200 144
TPS6 144
TWHC 168
TWLC 169
0100 - 0600 187
1020 - 1050 196,-197
1057 - 1060 216
1062 218
1064, 1066 217
1070 219
1074 217
1076 219
1080 217
10461 116
10494 118
1100 - 1111 203
1120 187
1121 - 1124 205
1125 187
1128 219
1121-1130 205
1131 187
1150 - 1154 204
1155 - 1158 206-207
1165, 1166 204
1170, 1171 207
1172 - 1178 206-207
1180 - 1182 208
1188 215
1266 189
1320 - 1349 187
13449 186
15235 159
15702 187
16339 118
16954 186
17627 116
1890-1893 145
201362 - 201412 233
201454, 201923 177
202178 - 202180 36
202777, 202778 116
202817 188
203003 - 203156 186
203225 116
203264 185
204666 188
204928 189
204990 185
206753 186
206767 118
207395 144
207762 118
208380-208382 37
208401, 208402 186
208406 41
208627 206
209199, 209200 189
209201 187
209593 116
212377 230
12867 209
21332 145
213895, 213896 119
215315 209
216209 116
21669 - 21873 45
22041-22044 186
22185 206
22274, 22275 45
24016 41
24196, 24197 4524813,
24814 42
24835, 24836 204
25017 116
250175 118
250341-250343 159
250353 159
250459 182
250682 159
251002 226
251468 226
251646, 251647 213
251660 116
251970-251999 183
252000 183
252001-252002 183
252215 41
252511, 252512 118
252542 - 253391 157
25388 - 25750 40-41
25931 42
26068 - 26666 186
27198 42
27241 206
27287 186
27315 206
27487-27555 230
27737 186
27793 - 27797 230
27876, 27877 115
28228-28229 177
28230 38
28250 - 28256 206
28323GY8 206
28612 - 28644 41
28984, 28985 186
29595 38
302482, 302483 38
303045 223
303785 38
304718 116
307159 159
307281 185
308022 174
308435OR9 Thru
308440OR9 221-224
308840 174
309652, 309653 116
31772, 31776 36-37
32054 202
32118 38
32325 36-37
32698 - 33439 38
3344 188
33856-33865 206
34136 38
34251 41
34331 206
34510, 34511 177
34698 206
34755, 34756 38
34758 38
34806 - 34807 145
34808 145
350090 159
350094-350100 36
350144, 350145 37
350184 36
350207-350209 159
350320-350334 38
350376 37
350431 115
350549, 350550 175
350593-350594 226
350637 226
350722 61
350723-350724 36
350822, 350823 175
350895-350898 37
350984 38
351075 25
351106 25
351324, 351325 38
351334 38
351574 - 351576 37
351927 - 351931 161
351953, 351954 161
351985 174
36161 233
36469 145
36578 209
37045 185
37368 145
38597 177
38855, 38904 41
38908, 38909 37
38953 177
38954 144
39811 188
41331 204
420059 - 420064 36
420496BK2 41
420496OR9-
420498OR9 41
420655OR9 41
420866-420871 38
421056, 421057 25
421312OR9 41
43562, 43563 144
44148, 44195 206, 208
44457, 44458 145
44745, 44766 223
45329 188
45589 40
46070 144
518, 522 210
58943 - 58945 162
60846 136
66053 - 66055 161
679, 680 204
7053K 187
7103 188
7123K, 7125K 187
7136 207
714 187
7162-7168 189
7180 230
7300, 7301 187
7307-7309 189
7312 188
7313 187
7392, 7393 210
7395 188
7400, 7401 189
7402 188
7406K 187
7420, 7421 189
8000 - 8076 210-211
8110 - 8148 210
885 189
927 - 939 203
9002A -
9050A 150-151
9040 - 9091 125
9006X - 9015X 154
9105A 155
9112A -
9130A 150-151
9015B - 9110B 150
9205A - 9220A 155
9190 128
9500, 9501 53
9502 52
9504 51
9506, 9507 53
9508, 9509 131
9510 117
9511 53
9512, 9513 56
9514 131
9515 117
9516 56
9517 51
9519 56
9520 52
9521 117
9522, 9523 56
9524 130
9525, 9526 131
9531 117
9552 55
9553 56
9554 130
9555, 9556, 9559 131
9560 81
9561-9563 80
9569, 9570, 9572 55
9575 133
9576 52
9608 132
9609 54
9610, 9610A 51
9615 56
9616 126
9617 127
9620 117
9623 133
9625 117
9626, 9627 127
9628 57
9631 133
9632 57
9633 133
9634, 9635 127
9636-9640 126
9641 117
9642 127
9643 117
9644 127
9645-9647 126
9648 127
9670-9690 128
9691 127
9692 - 9705 128
9720, 9721 132
9733-9783 122
9758, 9763 157
9785-9788 185
9792 - 9800 123
981 206

Index
ALPHABETICAL

A
Adapters, Step Plate 211
Adapters, Threaded
(Puller) 210-211
Air/Hydraulic Pumps 62-79
Aluminum Cylinders 17, 22, 23, 30, 32
Assemble to Order"
Pumps 112-115
Attachments, Pulling 201-202
Axle Journal Roller Bearing
Service Equipment 230
B
Bead Breaker 178
Bearing Cup Installer 230
Bearing Cup Remover 207
Bearing Pulling
Attachments 204-205
Bench Presses 137
Blankets, Protective 213
Blind Hole Puller Set 206
Bundles Posi-Lock 198
Bushing and Bearing Drivers 230
C
Cable Tools 178
Casters 118, 217
Center-Hole
Cylinders 22, 23
Accessories 41
Center-Hole Twin Cylinders 24
C-Clamps 177
C-Frame Press 136
Chain Wrenches 189
Chaser, Thread 188
Compression Tools 178-181
Counter-balance Valve 132
Couplers, Hydraulic 123, 128
Crane Accessories 147
Cranes, Mobile 146
Cribbing Block Sets 40, 160-162
Cylinder-Pump-Hose Sets,
Hydraulic 61
Cylinders, Hydraulic 12-41
D
Digital Pressure Gauge 124-125
Double-Acting Cylinders
18, 19, 23, 24,26, 27
E
Electric/Air
Pumps-Predotor Series 170
Electric/Hydraulic
Pumps 80–103
"Enforcer 55"
Hydraulic Puller 226
"Enforcer 100"
Hydraulic Puller 227
F
Filter/Regulator/Lubricator, Air117
Fixtures, Straightening 139-142
Flange Spreaders 175
Floor Cranes, Mobile 136
Flow Characteristics, Valves
48-50, 129
Fluid Level &
Temperature Gauge 118
Foot Pump Conversion Kit 60
Forcing Presses 126-135
G
Gauges, Hydraulic
Pressure 124-125
Gear and Pulley
Pullers 200-226, 226-229
Gland Nut Wrench, Adjustable 189
H
Head Inserts, Cylinder 41
High Pressure
Air Operated Pump 76-79
Horseshoe Lock Ring Plier 187
Hose, Hydraulic 122
Hydra Grip-O-Matic Pullers 214
Hydraulic Accessories 120-133
Hydraulic Couplers 123, 128
Hydraulic Cranes 146
Hydraulic Cylinders 12-41
Hydraulic Fittings 128
Hydraulic Gauges 124-125
Hydraulic Hose 122
Hydraulic Intensifier 185
Hydraulic Jacks 148-163
Hydraulic Oil 126
Hydraulic Presses, Shop 134-143
Hyd. Puller Sets 220
Hydraulic Pumps 42-119
Hydraulic Pump-
Cylinder-Hose Sets 61
Hydraulic Pullers Posi-Lock 199
Hydraulic Punches 182-183
Hydraulic Spreaders 176-181
Hydraulic System Testers 184
Hydraulic Tester Accessories 185
Hydraulic Tools 164-189
Hydraulic Valves
Pump Mounted 42-57
In-Line 132-133
Remote 129-131
I
Industrial Maintenance Sets 156
Industrial Maintenance
Puller Sets 212-213, 220-222
In-Line Valves 132-133
Inflatable Jacks 158-159
Intensifier, Hydraulic 110, 111, 185
Internal Pulling
Attachments 200
J
Jack Modules 162-163
Jack Screw Attachments 160
Jacks, High-Tonnage 160-163
Jacks, Hydraulic 148-163
Jacks, Hydraulic Toe 152-153
Jacks, Inflatable 158-159
Jacks, Stressing 157
Jimmy Bars 189
L
Lightweight Handpump 59
Load-Lowering Valve 132
Load-Positioning Slings 147
Low Profile Cylinders 20
M
Magnetic Pick-Up Tool 188
Magnetic Strip 118
Maintenance Sets 156
Manifolds 127
Metering Valve 133
Metric Conversion Charts 234
Mini Jack 155
Motion Control System 166
N
Nut Splitters 174
O
Oil, Hydraulic 126
"O" Ring Seal Pick 188
P
Pancake Cylinders 33
Photo Tachometer, Digital 188
Pipe Flange Spreaders 175
Pliers, Retaining Ring 187
Posi-Lock pullers 196
Positioning Slings 147
Post Tensioning Valves 57
Press Accessories 144-145
Presses, Hydraulic
Roll-Bed 142-143
Presses, Hydraulic Shop 134-143
Pressure Gauges, Hydraulic124-125
Pressure Switches 117
Protective Blankets 221
Pry Bars 201
Puller Adapters 210-211
Puller Attachments 204-205
Puller, Blind Hole 206
Pullers, Bearing 201-224, 226-229
Pullers, Bearing Cup 204, 207
Pullers, Gear 200-207, 214-224
Pullers, Hydraulic 214-230
Pullers, Internal 204-209
Pullers, Jaw-Type 200-201,
212-217, 220-224, 226-229
Pullers, Posi-Lock 196-197
Pullers, Pulley 205
Pullers, Sets 208-209, 212
Pullers, Slide Hammer 206-208
Pulley Pullers 205
Pull Cylinders 25
Pump Cart 119
Pump Accessories,
Hydraulic 116-119
Pump-Cylinder-Hose
Sets, Hydraulic 61
Pump Mounted Valves 51-57
Pump Reservoirs 119
Pumps, Hydraulic 42-119
Pumps, Hydraulic, Air 62-79
Pumps, Hydraulic,
Electric 80-103
Pumps, Hydraulic, Gasoline105-109
Pumps, Hydraulic, Hand 58-61
Pumps, Torque Wrench 171-173
Punches, Hydraulic 182-83
Push-Pullers, Hydraulic 220-221
Push-Pullers, Mechanical 220-221
Quality Standards, Industry 235
Quarter Horse Pumps 80-81
"Quiet" Pumps 98-101
R
Railroad Axle Journal Bearing
Service Equipment 228-229
Ratcheting Chain Wrenches 189
Remote Controls 116
Remote Mounted Valves 130-131
Reservoir Breather Kit 118
Retaining Ring Pliers 187
Rethreading Tools 188
Roll-Bed® Presses 142-143
S
Safety Seminars 239
Shaft Protectors 211
Shop Press
Accessories 144-145
Shop Presses 134-143
Shorty Cylinders 21
Single Acting
Compression Tools 182
Slide Hammer Pullers 206-207
Slings, Load-Positioning 147
Solenoid-Operated
Valves 55-56
Spanner Wrenches 189
Spreaders, Hydraulic 176
Standards, Quality 235
Step Plate Adapters 211
Storage Boxes,
Puller Sets 208-209
Straightening Fixtures 139-140, 142
Straightening Tool 214
Stressing Jacks
and Pumps 96-97, 157
"Strong Box" Puller Sets 209
Subplates, Pump 117
Switches, Hand and Foot 116, 117
T
Testers, Hydraulic System 184-188
Temperature &
Fluid Level Gauge 118
Thread Chaser 188
Threaded Adapters, Puller 210-211
Tire Pressing Set 144
Toe Jacks, Hydraulic 152-153
Tools, Hydraulic 164-194
Torque Wrench Pumps 171-173
Torque Wrench 168-169
V
V-Belt Pulley Pulling
Attachments 2015
Valves, Hydraulic
Pump Mounted 50-57
In-Line 132-133
Viton Seal Kits 39
W
Warranty 236
Wire, Bar, Cable
Cutting Tools 175-176
Wrenches, Industrial 189
Wrenches, Ratcheting Chain 189
Wrenches, Spanner 189

Selection Chart

Choose the right pump: This chart helps you calculating the time required for a cylinder to lift a load when powered by a 700 bar Power Team pump. For the hand pumps the number indicates the number of strokes to extend 25 mm. For the electric/air/gas pumps the number indicates the number of seconds to extend 25 mm.

			Cylinder Capacity (Tons)													
		STAGE	5	10	15	20	25	30	55	75	100	150	200	300	400	500
Hand Pumps *	P12	Single	14	32	44	65	72	93								
	P55	Single	6	14	19	28	31	40	71							
	P19/	Low	4	8	10	15	17	21								
	P19L	High	13	30	42	59	68	86								
	P59F	Low	1,8	4,1	5,7	8	9	12	20	29						
		High	8	17	24	34	48	50	85	122						
	P59(L)	Low	1,5	3,2	4,7	7	7,7	9,7	16,7	23,9						
	P157	High	6	14	19	28	31	40	71	101						
	P159	Low	0,5	1	1,3	1,9	2,2	2,8	5	7	9	13	18			
	P300	High	7	15	21	30	34	43	77	110	143	200	250			
	P460	Low	0,1	0,3	0,6	0,6	0,7	0,9	1,5	2,2	2,8	4,2	5,6	8,4	11,2	
		High	3,3	7,7	9	14	17,5	22	37	55	71	105	143	213	284	
Electric Hydraulic Pumps **	PE10	Low	0,5	1,2	1,6	2,2	2,6	3,2	5,5							
		High	6	13,4	18,9	27	31	39	66,2							
	PE17	Low	0,2	0,5	0,7	0,9	1,1	1,4	2,3	3,3	4,3	6,5	8,7			
		High	3,5	7,9	10,9	16	18	23	39	56,3	73	109	146			
	PE18	Low	0,4	0,8	1,2	1,6	1,8	2,3	3,9	5,7	7,3	10,8	14,6	21,9	29,2	
		High	3,3	7,5	10,3	15	17	21	37	53	69	102	136	207	276	
	PE21	Low	0,2	0,5	0,7	1	1,1	1,4	2,5	3,6	4,6	6,8	9,2	13,8	18,4	
		High	2,8	6,4	9	13	15	19	32	45,5	59	88	118	177	236	
	PED25	Low	0,2	0,4	0,6	0,9	1	1,3	2,2	3,2	4,1	6,1	8,3	12	15,7	19,9
		High	2,4	5,4	7,5	10,6	12,4	15,6	26,5	38,2	49,5	73,6	99,1	144,3	188,5	238,6
	PE30	Low	0,2	0,45	0,6	0,9	1	1,3	2,2	3,2	4,1	6				
		High	2	4,5	6	9	10	13	22	32	41	60				
	PE46	Low	0,1	0,3	0,4	0,5	0,6	0,7	1,3	1,8	2,4	3,5	4,7	7,2	9,6	
		High	1,3	2,9	4,1	5,9	6,8	8,6	14	22	28	42	56	84	112	
	PE55/	Low	0,1	0,2	0,3	0,4	0,4	0,6	0,9	1,4	1,8	2,6	3,5	5,4	7,2	
	PE60	High	1,1	2,4	3,4	4,8	5,6	7,1	12	17,8	23	34	45	69	92	
	PQ60	Low	0,1	0,2	0,3	0,4	0,4	0,5	0,9	1,3	1,7	2,5	3,4	5,1	6,8	8,5
		High	1	2,2	3,3	4,4	5,2	6,5	11	16,2	21	31	41	63	84	105
	PQ120	Low	0,1	0,2	0,3	0,4	0,4	0,5	0,9	1,3	1,7	2,5	3,4	5,1	6,8	8,5
		High	0,5	1,1	1,6	2,2	2,6	3,2	5,5	7,7	10	15	21	30	40	50
	PE400	Low	0,1	0,1	0,2	0,2	0,3	0,3	0,6	0,8	1	1,5	2,1	3	4	5
		High	0,1	0,3	0,4	0,6	0,7	0,9	1,6	2,2	2,9	4,4	5,9	8,7	11,6	14,5
Air Hydraulic Pumps**	PA6/	Single	10	22,4	31	44,4	51,3	65,2	-	-	-	-	-			
	PA9	Single	10	22,4	31	44,4	51,3	65,2	-	-	-	-	-			
	PA17	Low	0,2	0,5	0,7	0,9	1,1	1,4	2,3	3,3	4,3	6,5	8,7	-	-	
		High	3,5	7,9	10,9	16	18	23	39	56	73	109	146			
	PA46	Low	0,1	0,3	0,4	0,5	0,6	0,7	1,3	2	2,4	3,5	4,7	7,2	9,6	
		High	1,3	2,9	4,1	5,9	6,8	8,6	14	22	28	56	42	84	112	
	PA55	Low	0,1	0,3	0,4	0,6	0,7	0,9	1,5	2,2	2,8	4,1	5,5	8,4	11,2	
		High	1,1	2,4	3,4	4,8	5,6	7,1	12	18	23	34	45	69	92	
Gas Hydraulic Pumps**	PG30	Low	0,3	0,7	1	1,3	1,6	2	3,3	4,8	6,2	9,3	12,4	18,1	-	
		High	2	4,5	6,3	8,9	10,3	13	22	31,8	41,3	61,4	83	121	-	
	PG55	Low	0,1	0,3	0,4	0,6	0,7	0,8	1,4	2	2,6	3,9	5,2	7,6	9,9	12,5
		High	1,1	2,5	3,5	4,9	5,6	7,1	12,1	17,3	22,5	33,5	45	66	86	109
	PG120	Low	0,1	0,3	0,4	0,6	0,7	0,8	1,4	2	2,6	3,9	5,2	7,6	9,9	12,5
		High	0,5	1	1,5	2	2,4	3	5,1	7,3	9,5	14,2	19,1	27,8	36,3	46
	PG400	Low	0,1	0,1	0,2	0,2	0,3	0,3	0,6	0,8	1	1,5	2	3	3,8	4,9
		High	0,2	0,3	0,5	0,7	0,8	1	1,7	2,4	3,1	4,6	6,2	9	11,8	15

- Generally Recommended
- Marginal Check
- Not Recommended for most applications

Speed *number of strokes to extend 25 mm
**number of seconds to extend 25 mm

Selection

Choosing The Right Cylinder

Step 1 Select the hydraulic cylinder that best suits the application. See page 6, 12-13.

Step 2 Select the hydraulic pump, with valve option, that best matches the cylinder and application. See pages 6, 44-50.

Step 3 Select the hydraulic accessories you need. See pages 36-41.

WHAT TYPE OF CYLINDER DO YOU NEED?

1. To determine a cylinder's force capacity:

Force pounds — Cylinder Effective Area (cm^2) **X** PSI from Pump

2. To determine oil capacity of a cylinder:

Oil Capacity (cu. in.) — Cylinder Effective Area (cm^2) **X** Cylinder Stroke (in.)

3. To determine reservoir capacity needed for a multiple cylinder system:

Usable Oil — Oil Cap. of Cyl. (cm^3) **X** Number of Cyl. in System

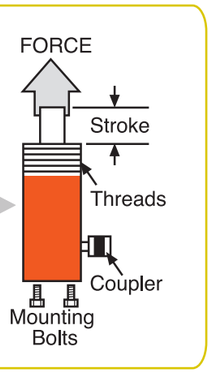

CONSIDERATIONS:

1. What push or pull tonnage is required per cylinder in your application? (Rule of thumb; Always choose a cylinder with a tonnage rating of 20% or more than what is required to lift the load.)
2. What is the push or pull stroke length required?
3. Does the cylinder need to push, pull or both? (Single-acting cylinders extend the piston under hydraulic pressure; double-acting cylinders extend and retract the piston under pressure.)
4. Does the application require multiple cylinders?
5. Is the application stationary, or must the components be light in weight for easy portability?
6. Do you need to extend a rod or cable through the center of the cylinder for the application, as in a tensioning operation?
7. Does the application require that the cylinder fit within limited-clearance work areas?
8. Does the application require that the cylinder be "dead-ended" at the end of it's work stroke?
9. Will the cylinder need to withstand off-center loads? Cylinders with swivel caps are available.
10. Does the application require that the lifted load be supported for extended periods of time? Locking collars are ideal for such jobs, as are cribbing blocks.
11. Is corrosion resistance required? Our unique "Power Tech" surface treatment is standard on many Power Team cylinders, and optional on many of our cylinders which feature steel construction.
12. Will the application involve high cycles (over 2,500 in the cylinder's lifetime)? Our "RD," "RH," "RP" and "C" series cylinders are ideal choices. Please refer to pages 12-13 for the capabilities of each cylinder.

ONLY POWER TEAM PROVIDES THE *POWER TECH* SURFACE TREATMENT:

- High corrosion and wear resistance, anti-galling properties.
- Significantly increases the life expectancy of a cylinder.
- Retains lubricants, prevents bronze and other materials from sticking to surface.
- Increases fatigue and impact strength.
- Increases surface yield and tensile strength.
- Provides improved abrasion and scratch resistance.
- Causes no appreciable dimensional change.
- 56 RC minimum surface hardness.
- Passes ASTM B117-85 100 hour salt spray corrosion resistance tests.

The **"Power Tech"** surface treatment is standard on the gland nut, cylinder body and piston/piston rod of the following cylinders: RLS50, RLS100, RLS200, RLS300, RLS500S, RLS750S, RLS1000S, RLS1500S, and RSS1002. NOTE: Bronze plating may be used in place of the "Power Tech" surface finish for the piston/piston rod of any of the above cylinders. The **"Power Tech"** surface treatment is standard on the standpipe of all "RH" series single and double-acting cylinders. The **"Power Tech"** surface treatment is standard on the piston/piston rod of the RT172, RT302 and RT503 cylinders.

Hydraulic
CIRCUITS

Pumps, Cylinders, Controls

These are just a few basic systems possible with Power Team hydraulic components. Countless applications are possible: In presses, for lifting or jacking applications or in production or maintenance setups. The pump shown is a typical electric/hydraulic unit. Electric, air or gas driven pumps are available.

1 Single-acting cylinder or cylinders in the circuit, controlled by a pump mounted valve.

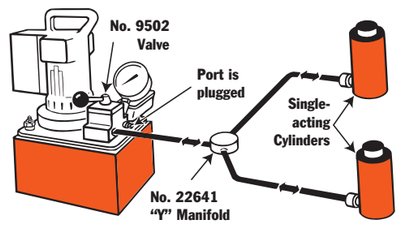

2 Double-acting cylinder or cylinders in the circuit, controlled by a pump mounted valve.



3 Single-acting cylinder controlled by a remote mounted valve.

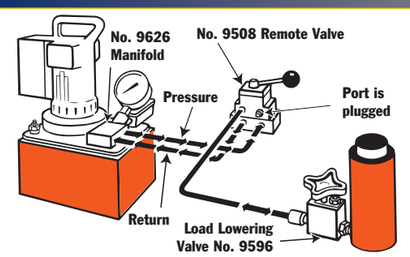

4 Double-acting cylinders controlled by a remote mounted valve

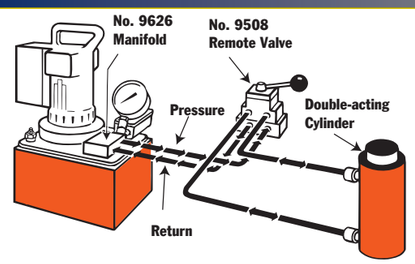

5 Single-acting cylinders with a sequence valve which controls the primary and secondary cylinder circuits.

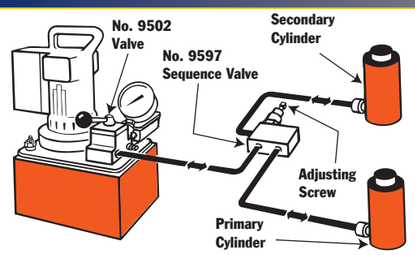

6 Double-acting cylinder with a sequence valve which controls the primary and secondary cylinder circuits.

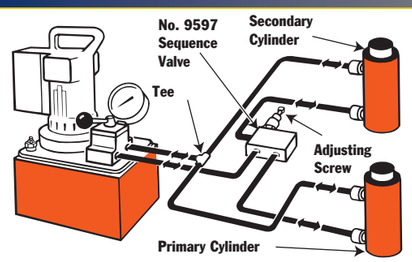

Basic single-acting system with a hand pump, gauge, hose and single-acting cylinder.

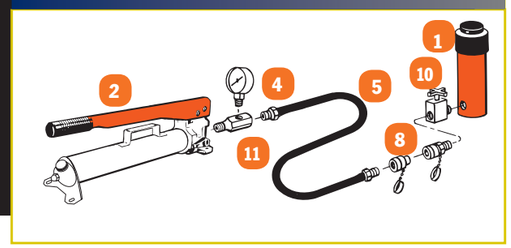

1. Cylinder – applies hydraulic force.
2. Pump – a device for converting mechanical energy to fluid energy.
3. Directional valve – controls the direction of hydraulic fluid in the system.
4. Gauge – measures bar pressure and/or force.
5. Hose – transports hydraulic fluid.
6. Manifold – allows distribution of hydraulic fluid from one source to several cylinders. (No. 9617)
7. Swivel Connector – allows proper alignment of valves and/or gauges. Used when units being connected cannot be rotated. (No. 10469)
8. Quick Coupling – "hose half" and "cylinder half" couplings are used for quick connection and fluid flow check when separated. (No. 9797 and 9798)
9. Shut-Off Valve – regulates the flow of hydraulic fluid to or from cylinders. (No. 9642 or 9644)
10. Load-Lowering Valve – allows metered lowering of cylinder and provides safety when prolonged load holding is required. (No. 9596)
11. Tee Gauge Adapter – allows for installation of pressure/tonnage gauge anywhere in the hydraulic system. (No. 9670)
12. Pipe Plug – for blocking unused ports within the system. (No. 9687)

Basic single-acting system with a hand pump, gauge, hose, multiple shut-off valves, load-lowering valves and multiple cylinders.

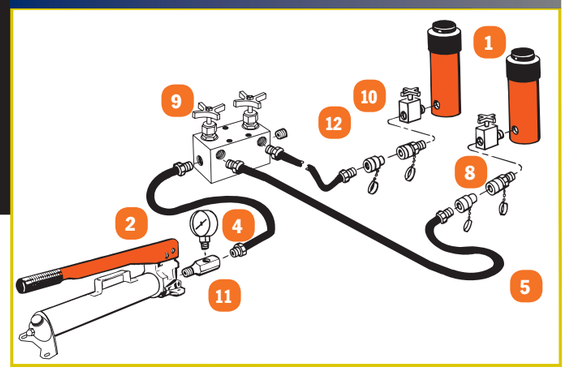

Basic double-acting system with an electric/hydraulic pump,shut-off valves, load-lowering valves and multiple double-acting cylinders.

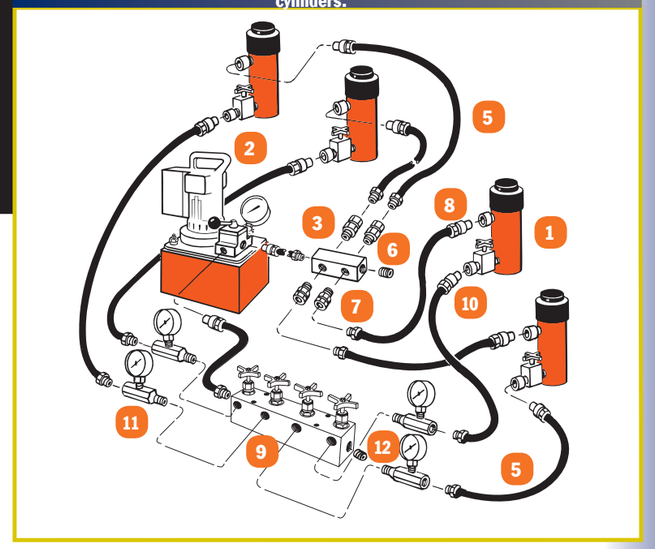

Selection Chart - Choose the right cylinder

Tons	SA and DA action	Stroke mm.	Retracted Height mm.	Type of return	Duty	Base Mount. hole	Collar Thread	Order No.
2		127	233		High	-	✔	RP25
5 pull		139,7	302		High	-	✔	RP55
5		25,4	111		High	✔	✔	C51C
		82,6	165		High	✔	✔	C53C
		133,4	216		High	✔	✔	C55C
		133,4	267		High	-	✔	C55CBT
		184,2	273		High	✔	✔	C57C
		235	324		High	✔	✔	C59C
		14,3	41		High	✔	-	RLS50
10		257,2	349		High	✔	✔	C1010C
		257,2	394		High	-	✔	C1010CBT
		308	400		High	✔	✔	C1012C
		358,8	451		High	✔	✔	C1014C
		25,4	92		High	✔	✔	C101C
		54	121		High	✔	✔	C102C
		104,8	172		High	✔	✔	C104C
		155,6	248		High	✔	✔	C106C
		155,6	292		High	-	✔	C106CBT
		206,4	299		High	✔	✔	C108C
		254	391	♦	High	✔	✔	RD1010
		158,8	297	♦	High	✔	✔	RD106
		63,5	133		High	✔	-	RH102
		203,2	287		High	✔	-	RH108
		11,1	45		High	✔	-	RLS100
		38,1	89		High	-	-	RSS101
12		7,9	56		High	✔	✔	RH120
		41,3	122		High	-	✔	RH121
		41,3	122		High	-	✔	RH121T
		76,2	184		High	-	✔	RH123
15		257,2	373		High	✔	✔	C1510C
		308	424		High	✔	✔	C1512C
		358,8	475		High	✔	✔	C1514C
		406,4	522		High	✔	✔	C1516C
		25,4	124		High	✔	✔	C151C
		54	149		High	✔	✔	C152C
		104,8	200		High	✔	✔	C154C
		155,6	271		High	✔	✔	C156C
		206,4	322		High	✔	✔	C158C
17,5		50,8	175		High	✔	-	RT172
20		54	162		High	-	-	RA202
		104,8	213		High	-	-	RA204
		155,6	264		High	-	-	RA206
		50,8	156		High	✔	✔	RH202
		76,2	154		High	✔	-	RH203
		152,4	308		High	✔	✔	RH206
		11,1	51		High	✔	-	RLS200
		44,5	95		High	-	-	RSS202
25		260,4	375		High	✔	✔	C2510C
		311,2	425		High	✔	✔	C2512C
		362	476		High	✔	✔	C2514C
		362	543		High	-	✔	C2514CBT
		25,4	140		High	✔	✔	C251C
		50,8	165		High	✔	✔	C252C
		101,6	216		High	✔	✔	C254C
		158,8	273		High	✔	✔	C256C
		158,8	314		High	-	✔	C256CBT
		209,6	324		High	✔	✔	C258C
		362	518	♦	High	✔	✔	RD2514
		158,8	340	♦	High	✔	✔	RD256

Tons	SA and DA action	Stroke mm.	Retracted Height mm.	Type of return	Duty	Base Mount. hole	Collar Thread	Order No.
30		54	187		High	-	-	RA302
		104,8	238		High	-	-	RA304
		155,6	289		High	-	-	RA306
		257,2	438	♦	High	-	✔	RH3010
		63,5	159		High	✔	✔	RH302
		76,2	179	♦	High	✔	-	RH303
		152,4	248		High	✔	✔	RH306
		152,4	281	♦	High	✔	-	RH306D
		149,2	283		High	-	-	RHA306
		12,7	59		High	✔	-	RLS300
		61,9	117		High	-	-	RSS302
		63,5	214		High	✔	-	RT302
50		76,2	181		High	✔	✔	RH503
		15,9	67		High	✔	-	RLS500S
		60,3	127		High	-	-	RSS502
		76,2	268		High	✔	-	RT503
55		260,4	384		High	✔	✔	C5510C
		336,6	460		High	✔	✔	C5513C
		50,8	175		High	✔	✔	C552C
		108	232		High	✔	✔	C554C
		158,8	283		High	✔	✔	C556C
		254	329	Load	-	-	-	R5510C
		254	365	Load	-	-	-	R5510L
		50,8	125	Load	-	-	-	R552C
		50,8	162	Load	-	-	-	R552L
		152,4	264	Load	-	-	-	R556C
		152,4	321	Load	-	-	-	R556L
		254	384		High	✔	-	RA5510
		54	171		High	-	-	RA552
		104,8	222		High	-	-	RA554
		155,6	273		High	✔	-	RA556
		155,6	318		High	-	-	RA556L
		50	125	Load	High	-	-	RC0552P
		333,4	504	♦	High	✔	✔	RD5513
		463,6	657	♦	High	✔	✔	RD5518
		158,8	329	♦	High	✔	✔	RD556
60		257,2	459	♦	High	-	✔	RH6010
		76,2	235		High	✔	✔	RH603
		127	241	♦	High	✔	-	RH605
		152,4	318		High	✔	✔	RH606
		101,6	241	♦	High	✔	-	RHA604D
75		333,4	492		High	-	✔	C7513C
		155,6	314		High	-	✔	C756C
		15,9	79		High	✔	-	RLS750S
80		333,4	518	♦	High	✔	✔	RD8013
100		260,4	429		High	-	✔	C10010C
		50,8	219		High	-	✔	C1002C
		168,3	337		High	-	✔	C1006C
		254	343	Load	-	-	-	R10010C
		254	372	♦	-	-	-	R10010D
		254	387	Load	-	-	-	R10010L
		50,8	140	Load	-	-	-	R1002C
		50,8	169	♦	-	-	-	R1002D
		50,8	184	Load	-	-	-	R1002L
		152,4	241	Load	-	-	-	R1006C
		152,4	270	Load	-	-	-	R1006D
		152,4	286	Load	-	-	-	R1006L
		54	197		High	-	-	RA1002
		158,8	298		High	-	-	RA1006

Tons	SA and DA action	Stroke mm.	Retracted Height mm.	Type of return	Duty	Base Mount. hole	Collar Thread	Order No.
100		158,8	340	Load	High	-	-	RA1006L
		45	137	Load	High	-	-	RC1002P
		333,4	515	♦	High	✔	✔	RD10013
		511,2	718	♦	High	✔	✔	RD10020
		168,3	350	♦	High	✔	✔	RD1006
		38,1	165	♦	High	-	-	RH1001
		260,4	503	♦	High	-	✔	RH10010
		76,2	254		High	-	-	RH1003
		152,4	314	♦	High	✔	-	RH1006
		15,9	86		High	✔	-	RLS1000S
		57,2	140		High	-	-	RSS1002
		38,1	144	♦	High	-	-	RSS1002D
		123,8	384	♦	High	✔	-	RT1004
150		254	365	Load	-	-	-	R15010C
		254	392	♦	-	-	-	R15010D
		254	410	Load	-	-	-	R15010L
		50,8	162	Load	-	-	-	R1502C
		50,8	189	♦	-	-	-	R1502D
		50,8	206	Load	-	-	-	R1502L
		152,4	264	Load	-	-	-	R1506C
		152,4	291	♦	-	-	-	R1506D
		152,4	308	Load	-	-	-	R1506L
		333,4	543	♦	High	✔	✔	RD15013
		460,4	674	♦	High	✔	✔	RD15018
		168,3	378	♦	High	✔	✔	RD1506
		127	308	♦	High	-	-	RH1505
		203,2	349	♦	High	-	-	RH1508
		14,3	102		High	✔	-	RLS1500S
155		45	148	Load	High	-	-	RC1552P
200		254	394	Load	-	-	-	R20010C
		254	410	♦	-	-	-	R20010D
		254	445	Load	-	-	-	R20010L
		50,8	191	Load	-	-	-	R2002C
		50,8	207	♦	-	-	-	R2002D
		50,8	241	Load	-	-	-	R2002L
		152,4	292	Load	-	-	-	R2006C
		152,4	308	♦	-	-	-	R2006D
		152,4	343	Load	-	-	-	R2006L
		333,4	572	♦	High	✔	✔	RD20013
		460,4	724	♦	High	✔	✔	RD20018
		168,3	406	♦	High	✔	✔	RD2006
		203,2	408		High	✔	-	RH2008
240		45	155	Load	High	-	-	RC2402P
250		76,2	290		High	-	-	RSS2503
280		254	394	Load	-	-	-	R28010C
		254	437	♦	-	-	-	R28010D
		254	451	Load	-	-	-	R28010L
		50,8	191	Load	-	-	-	R2802C
		50,8	234	♦	-	-	-	R2802D
		50,8	248	Load	-	-	-	R2802L
		152,4	292	Load	-	-	-	R2806C
		152,4	335	♦	-	-	-	R2806D
		152,4	349	Load	-	-	-	R2806L
300		330,2	617	♦	High	✔	✔	RD30013
300		152,4	439	♦	High	✔	✔	RD3006
355		254	435	Load	-	-	-	R35510C
		254	550	♦	-	-	-	R35510D
		254	495	Load	-	-	-	R35510L
		50,8	232	Load	-	-	-	R3552C

Tons	SA and DA action	Stroke mm.	Retracted Height mm.	Type of return	Duty	Base Mount. hole	Collar Thread	Order No.
355		50,8	290	♦	-	-	-	R3552D
		50,8	292	Load	-	-	-	R3552L
		152,4	333	Load	-	-	-	R3556C
		152,4	448	♦	-	-	-	R3556D
		152,4	394	Load	-	-	-	R3556L
380		45	178	Load	High	-	-	RC3802P
400		330,2	651	♦	High	✔	✔	RD40013
		152,4	473	♦	High	✔	✔	RD4006
430		254	467	Load	-	-	-	R43010C
		254	516	♦	-	-	-	R43010D
		254	537	Load	-	-	-	R43010L
		50,8	264	Load	-	-	-	R4302C
		50,8	313	♦	-	-	-	R4302D
		50,8	333	Load	-	-	-	R4302L
		152,4	365	Load	-	-	-	R4306C
		152,4	413	♦	-	-	-	R4306D
		152,4	435	Load	-	-	-	R4306L
500		330,2	677	♦	High	✔	✔	RD50013
		152,4	499	♦	High	✔	✔	RD5006
565		254	495	Load	-	-	-	R56510C
		254	548	♦	-	-	-	R56510D
		254	575	Load	-	-	-	R56510L
		50,8	292	Load	-	-	-	R5652C
		50,8	345	♦	-	-	-	R5652D
		50,8	371	Load	-	-	-	R5652L
		152,4	394	Load	-	-	-	R5656C
		152,4	447	♦	-	-	-	R5656D
		152,4	473	Load	-	-	-	R5656L
620		45	192	Load	High	-	-	RC6202P
740		250	465	Load	-	-	-	RC74010C
		250	508	♦	High	-	-	RC74010D
		250	595	Load	High	-	-	RC74010L
		50	265	Load	-	-	-	RC7402C
		50	283	♦	High	-	-	RC7402D
		50	395	Load	High	-	-	RC7402L
		150	365	Load	-	-	-	RC7406C
		150	398	♦	High	-	-	RC7406D
		150	495	Load	High	-	-	RC7406L
965		250	390	Load	-	-	-	RC96510C
		250	530	♦	High	-	-	RC96510D
		250	635	Load	High	-	-	RC96510L
		50	290	Load	-	-	-	RC9652C
		50	310	♦	High	-	-	RC9652D
		50	455	Load	High	-	-	RC9652L
		150	390	Load	-	-	-	RC9656C
		150	420	♦	High	-	-	RC9656D
		150	555	Load	High	-	-	RC9656L
1220		250	615	Load	-	-	-	RC122010C
		250	550	♦	High	-	-	RC122010D
		250	698	Load	High	-	-	RC122010L
		50	415	Load	-	-	-	RC12202C
		50	330	♦	High	-	-	RC12202D
		50	443	Load	High	-	-	RC12202L
		150	440	Load	-	-	-	RC12206C
		150	440	♦	High	-	-	RC12206D
		150	598	Load	High	-	-	RC12206L

Single Action — Spring Return
Double Action — ♦ Hydraulic Return

CYLINDERS

SUPERIOR FEATURES OF POWER TEAM HYDRAULIC CYLINDERS:

We build our own cylinders in our ISO 9001 registered manufacturing facility. All Power Team cylinders are date-coded. Maximum pressure rating and capacity are stamped on the cylinder. All cylinders comply to the demanding ASME B30.1 standard and are proof tested to 125% of capacity before leaving our factory. Cylinder bores are roller burnished to harden the surface and make it smoother, increasing seal life by 30%. Base mounting holes withstand full capacity of the cylinder. Typical cylinder burst pressures range from 700 to 2400 bar. Cylinders with gland nuts may be "dead-ended" at 700 bar. Cylinders are assembled and tested by certified assemblers. Eddy current and mag particle inspection detects flaws in the steel. Cylinder bodies are solid steel, not welded like some competitive cylinders. Material is removed from surface, to assure that any flaws are removed.

FROM 2 TO 1220 TONS!

Page **SELECTION CHART... 12** Choose the right Cylinder

Page **C SERIES...16** General Purpose Cylinders

Page **CBT SERIES... 18** Threaded End Cylinders

Page **RA SERIES...19** Aluminum Cylinders

Page **RLS SERIES...20** Low Profile Cylinders

Page **RSS SERIES...21** Shorty Cylinders

Page **RH SERIES...22** Center Hole Cylinders

Page **RT SERIES...24** Center Hole Power-twin® Cylinders

Page **RP SERIES...25** Pull Cylinders

Page **RD SERIES...26** Double-Acting, Hydraulic-Return

Page **R SERIES...28, 30** Single Acting, Load Return Double-Acting, Hydraulic Return

Page **RL ALUMINUM ...32** Locking Collar Aluminum

Page **RC SERIES...33** Pancake Cylilnders

Page **RL STEEL...34** Locking Collar Steel

Page **ACCESSORIES ...36-41**



Series	Description	Page	Action	TONNAGE 2	5	10	12	15	17.5	20	25	30	50
C	General Purpose	18	Single/Spring		X	X		X			X		
CBT	Threaded End Cylinders	18	Single/Spring		X	X					X		
RA	Aluminum Cylinders	19	Single/Spring							X		X	
RLS	Low Profile Cylinders	20	Single/Spring		X	X				X		X	X
RSS	Shorty Cylinders	21	Single/Spring/Double Act			X				X		X	X
RH	Center Hole Cylinders	22	Single/Spring/Double Act			X	X			X		X	X
RT	Center Hole Power Twin Cylinders	24	Single/Spring/Double Act						X			X	X
RP	Pull Cylinders	25	Single/Spring	X	X								
RD	Double Acting Cylinders	26	Double Acting			X					X		
R	High Tonnage Cylinder	28, 30	Single Acting/Load Return/ Double Acting										
RL	Locking Collar Cylinders	32, 34-35	Single Acting/Load Return										
RC	Pancake Cylinders	33	Single Acting/Load Return										

Series	TONNAGE 55	60	75	80	100	150	200	250	280	300	355	400	430	500	565	740 to 1220
C	X		X		X											
CBT																
RA	X				X											
RLS			X		X	X										
RSS					X			X								
RH		X			X	X	X									
RT					X											
RP																
RD	X			X	X	X	X			X		X		X		
R	X				X	X	X		X		X		X		X	X
RL	X†				X†	X	X		X		X		X		X	X
RC	X				X	X		240			X				620	

† LOCKING COLLAR AVAILABLE IN ALUMINUM.

General Purpose
CYLINDERS C SERIES

5-100 TONS
General Purpose, Single Acting, Spring-Return

Rugged, high quality cylinder used for lifting and pressing

CYLINDERS

RUGGED, HIGH QUALITY CYLINDER USED FOR LIFTING AND PRESSING

- Aluminum bronze bearing reduces wear caused by off-center loads.
- Maximum sized springs speed piston return and increase spring life.
- Solid steel cylinder body for durability.
- Chrome plated piston rod resists wear and corrosion.
- Wide range of accessories available to thread onto piston rod, collar, or onto cylinder base.
- Base mounting holes standard on 5 through 55 ton cylinders; optional on 75 and 100 ton cylinders.
- A 3/8" NPTF female half coupler is standard.

BASE MOUNTING HOLES



Cylinder Tonnage	No. Holes	Thread Size	Thread Depth	Bolt Circle Diameter (mm)
5	2†	1/4–20	9.5	25.4
10		5/16–18	12.7	39.7
15		3/8–16		47.6
25		1/2–13	19.1	58.7
55				95.3
*Optional 75	4	3/4–10	25.4	114.3
*Optional 100		1–8		120.7

*** Consult Factory (45° from coupler) † 90° from coupler.**

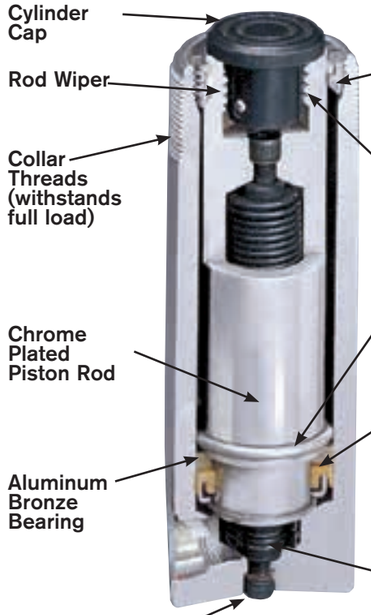



Base mounting holes page 233.

Cyl Cap Tons	Stroke (mm)	Order No.	Oil Cap. (cm³)	A Re-tracted Height (mm)	B Ex-tended Height (mm)	C Outside Dia. (mm)	D Collar Thread (in.)	E Piston Collar Thread Length (mm)	F Base to Port (mm)	H Piston Rod Dia. (mm)	J Piston Rod Int. Thread and Depth (mm)	K Rod Protru-sion (mm)	Bore Dia. (mm)	Cylinder Effective Area (cm²)	Metric Tons at 700 (bar)	Weight (kg)
5	25,4	C51C	18	110,3	138,1	38,1	1 1/2-16	28,6	19,1	25,4	3/4-16 x 15,9	6,4	28,6	6,4	4,5	1,0
	82,6	C53C	52	165,1	247,7	38,1	1 1/2-16	28,6	19,1	25,4	3/4-16 x 15,9	6,4	28,6	6,4	4,5	1,5
	133,4	C55C	85	215,9	349,3	38,1	1 1/2-16	28,6	19,1	25,4	3/4-16 x 15,9	6,4	28,6	6,4	4,5	1,8
	184,2	C57C	118	273,1	457,2	38,1	1 1/2-16	28,6	19,1	25,4	3/4-16 x 15,9	6,4	28,6	6,4	4,5	2,3
	235,0	**C59C**	**151**	**323,9**	**558,8**	**38,1**	**1 1/2-16**	**28,6**	**19,1**	**25,4**	**3/4-16 x 15,9**	**6,4**	**28,6**	**6,4**	**4,5**	**2,6**
10	25,4	C101C	36	92,1	117,5	57,2	2 1/4-14	28,6	19,1	38,1	1-8 x 19,1	6,4	42,8	14,4	10,2	1,8
	50,8	C102C	79	122,0	172,8	57,2	2 1/4-14	28,6	19,1	38,1	1-8 x 19,1	6,4	42,8	14,4	10,2	2,3
	104,8	C104C	151	171,5	276,2	57,2	2 1/4-14	28,6	19,1	38,1	1-8 x 19,1	6,4	42,8	14,4	10,2	3,0
	155,6	C106C	225	247,7	403,2	57,2	2 1/4-14	28,6	19,1	38,1	1-8 x 19,1	6,4	42,8	14,4	10,2	4,3
	206,4	C108C	362	298,5	504,8	57,2	2 1/4-14	28,6	19,1	38,1	1-8 x 19,1	6,4	42,8	14,4	10,2	5,0
	257,2	C1010C	370	349,3	606,4	57,2	2 1/4-14	28,6	19,1	38,1	1-8 x 19,1	6,4	42,8	14,4	10,2	5,9
	308,0	C1012C	444	400,1	708 ,0	57,2	2 1/4-14	28,6	19,1	38,1	1-8 x 19,1	6,4	42,8	14,4	10,2	6,6
	358,8	C1014C	518	450,9	809,6	57,2	2 1/4-14	28,6	19,1	38,1	1-8 x 19,1	6,4	42,8	14,4	10,2	7,3
	406,4	**C1016C**	**592**	**520,7**	**927,1**	**57,2**	**2 1/4-14**	**28,6**	**19,1**	**38,1**	**1-8 x 19,1**	**6,4**	**42,8**	**14,4**	**10,2**	**8,4**
15	25,4	C151C	51	123,8	149,2	69,9	2 3/4-16	28,6	19,1	44,5	1-8 x 19,1	6,4	50,8	20,3	14,2	3,4
	54,0	C152C	110	149,2	203,2	69,9	2 3/4-16	28,6	19,1	44,5	1-8 x 19,1	6,4	50,8	20,3	14,2	4,0
	104,8	C154C	211	200 ,0	304,8	69,9	2 3/4-16	28,6	19,1	44,5	1-8 x 19,1	6,4	50,8	20,3	14,2	5,2
	155,6	C156C	315	271,4	427,0	69,9	2 3/4-16	28,6	19,1	44,5	1-8 x 19,1	6,4	50,8	20,3	14,2	6,9
	206,4	C158C	418	322,2	528,6	69,9	2 3/4-16	28,6	19,1	44,5	1-8 x 19,1	6,4	50,8	20,3	14,2	8,1
	257,2	C1510C	521	373 ,0	630,2	69,9	2 3/4-16	28,6	19,1	44,5	1-8 x 19,1	6,4	50,8	20,3	14,2	9,4
	308,0	C1512C	625	423,8	731,8	69,9	2 3/4-16	28,6	19,1	44,5	1-8 x 19,1	6,4	50,8	20,3	14,2	10,5
	358,8	C1514C	728	474,6	833,4	69,9	2 3/4-16	28,6	19,1	44,5	1-8 x 19,1	6,4	50,8	20,3	14,2	11,8
	406,4	**C1516C**	**824**	**522,3**	**928,7**	**69,9**	**2 3/4-16**	**28,6**	**19,1**	**44,5**	**1-8 x 19,1**	**6,4**	**50,8**	**20,3**	**14,2**	**12,8**
25	25,4	C251C	84	139,7	165,1	85,7	3 5/16-12	49,2	25,4	57,2	1 1/2-16 x 25,4	9,5	65,1	33,2	23,4	5,4
	50,8	C252C	169	164,5	215,3	85,7	3 5/16-12	49,2	25,4	57,2	1 1/2-16 x 25,4	9,5	65,1	33,2	23,4	6,3
	101,6	C254C	338	215,9	317,5	85,7	3 5/16-12	49,2	25,4	57,2	1 1/2-16 x 25,4	9,5	65,1	33,2	23,4	8,0
	158,8	C256C	528	273,1	431,8	85,7	3 5/16-12	49,2	25,4	57,2	1 1/2-16 x 25,4	9,5	65,1	33,2	23,4	9,8
	209,6	C258C	697	323,9	533,4	85,7	3 5/16-12	49,2	25,4	57,2	1 1/2-16 x 25,4	9,5	65,1	33,2	23,4	11,6
	260,4	C2510C	865	374,4	635,0	85,7	3 5/16-12	49,2	25,4	57,2	1 1/2-16 x 25,4	9,5	65,1	33,2	23,4	13,3
	311,2	C2512C	1.036	425,5	736,0	85,7	3 5/16-12	49,2	25,4	57,2	1 1/2-16 x 25,4	9,5	65,1	33,2	23,4	15,0
	362,0	**C2514C**	**1.205**	**476,3**	**838,2**	**85,7**	**3 5/16-12**	**49,2**	**25,4**	**57,2**	**1 1/2-16 x 25,4**	**9,5**	**65,1**	**33,2**	**23,4**	**16,7**
55	50,8	C552C	362	174,6	225,4	127,0	5-12	55,6	34,9	79,4	-	3,2	95,3	71,2	50,1	14,7
	108,0	C554C	769	231,8	339,7	127,0	5-12	55,6	34,9	79,4	-	3,2	95,3	71,2	50,1	18,7
	158,8	C556C	1.131	282,6	441,3	127,0	5-12	55,6	34,9	79,4	-	3,2	95,3	71,2	50,1	23,1
	260,4	C5510C	1.853	384,2	644,5	127,0	5-12	55,6	34,9	79,4	-	3,2	95,3	71,2	50,1	30,4
	336,6	**C5513C**	**2.398**	**460,4**	**796,9**	**127,0**	**5-12**	**55,6**	**34,9**	**79,4**	**-**	**3,2**	**95,3**	**71,2**	**50,1**	**35,3**
75	155,6	C756C	1.596	314,3	469,9	146,1	5 3/4-12	44,5	31,8	95,3	-	3,2	114,3	102,6	72,1	33,3
	333,4	**C7513C**	**3.421**	**492,1**	**825,5**	**146,1**	**5 3/4-12**	**44,5**	**31,8**	**95,3**	**-**	**3,2**	**114,3**	**102,6**	**72,1**	**49,6**
100	50,8	C1002C	675	219,1	269,9	158,8	6 1/4-12	57,2	41,3	104,8	-	3,2	130,2	133,0	93,6	28,5
	168,3	C1006C	2.245	336,6	504,8	158,8	6 1/4-12	57,2	41,3	104,8	-	3,2	130,2	133,0	93,6	41,2
	260,4	C10010C	3.467	428,6	689,0	158,8	6 1/4-12	57,2	41,3	104,8	-	3,2	130,2	133,0	93,6	51,2

CYLINDER/PUMP MATCHING Page 6
ACCESSORY/REPAIR Page 36
PUMP/CYLINDER SETS Page 61
HYDRAULIC ACCESSORIES Page 120
VALVES Page 129
TECH DATA Page 231

Threaded End
CYLINDERS CBT SERIES

5-25 TONS
Single Acting,
Spring-Return

Threaded piston rod end and base threads accommodate accessories and adapters.

- Threaded cylinder collars, piston rod ends, and internal base threads simplify mounting.
- A 9796 3/8" NPTF female half coupler is standard with each cylinder; oil port threads are 3/8" NPTF.

C55CBT

C2514CBT

ASME B30.1
700 BAR



Cyl. Cap. (tons)	Stroke (mm)	Order No.	Oil Cap. (cm³)	A Re-tracted Height (mm)	B Ex-tended Height (mm)	C Outside Dia. (mm)	D Collar Thread (in.)	E Collar Thread Length (mm)	F Base to Port (mm)	H Piston Rod Dia. (in.)	K Piston Rod Protrusion (mm)	P Piston Rod Thread (NPT)	Q Internal Base Thread (NPSM) (in.)	Bore Dia. (mm)	Cyl. Eff. Area (cm²)	Metric Tons at 700 bar	Weight (kg)
5	**133,4**	**C55CBT**	**85**	**266,7**	**400,1**	**38,1**	**1 1/2–16**	**28,6**	**47,6**	**25,4**	**28,6**	**3/4–14**	**3/4–14**	**28,6**	**6,4**	**4,5**	**2,0**
10	155,6	**C106CBT**	228	292,1	447,7	57,2	2 1/4–14	28,6	42,9	38,1	27,0	1 1/4–11 1/2	1 1/4–11 1/2	27,0	14,4	10,2	4,7
	257,2	**C1010CBT**	375	393,7	650,9	57,2	2 1/4–14	28,6	42,9	38,1	27,0	1 1/4–11 1/2	1 1/4–11 1/2	27,0	14,4	10,2	6,3
25	**158,8**	**C256CBT**	**528**	**339,7**	**498,5**	**85,7**	**3 5/16–12**	**49,2**	**47,6**	**57,2**	**47,6**	**2–11 1/2**	**2–11 1/2**	**47,6**	**33,3**	**23,4**	**11,1**
	362,0	**C2514CBT**	1205	542,9	904,9	85,7	3 5/16–12	49,2	47,6	57,2	47,6	2–11 1/2	2–11 1/2	47, 6	33,3	23,4	18,2

CYLINDER/PUMP MATCHING Page 6
ACCESSORY/REPAIR Page 36
PUMP/CYLINDER SETS Page 61
HYDRAULIC ACCESSORIES Page 120
VALVES Page 129
TECH DATA Page 231

ALUMINUM
CYLINDERS RA-SERIES

20-200 TONS
Single Acting,
Spring-Return

Half the weight of equal capacity steel cylinders.

- Half the weight of steel cylinders.
- Aluminum body resists sparking in explosive environments.
- Hard coated aluminum piston rod and cylinder bore resist wear and corrosion.
- Grooved piston top helps keep the load from sliding on top of piston.
- Designed for jacking and other non- production operations.

RA552

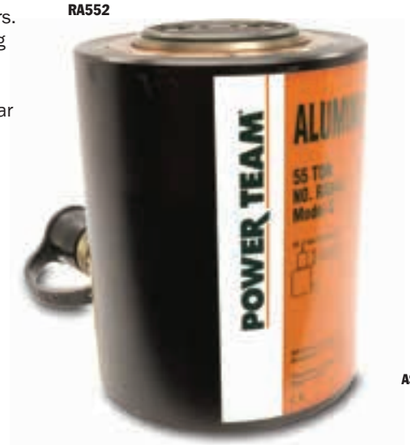

ASME B30.1
700 BAR

RA1006



Base Mtg. Holes (4) at 45° from coupler (RA556, RA5510) 3/8"-16 x 114,3mm Dia. B.C. Depth = 12,7 mm

Cyl. Cap. (tons)	Stroke (mm)	Order No.	Oil Cap. (cm³)	A Retracted Ht. (mm)	B Extended Ht. (mm)	C Outside Dia. (mm)	F Base to Port (mm)	H Piston Rod Dia. (mm)	K Piston Rod Protrusion (mm)	Bore Dia. (mm)	Cylinder Effective Area (cm²)	Metric Tons at 700 bar	Weight. (kg)
20	54,0	RA202	154	161,9	215,9	95,3	31,8	50,8	7,9	60,3	28,6	20,1	3,5
	104,8	RA204	300	212,7	317,5	95,3	31,8	50,8	7,9	60,3	28,6	20,1	4.2
	155,6	RA206	445	263,5	419,1	95,3	31,8	50,8	7,9	60,3	28,6	20,1	5.1
30	54,0	RA302	226	187,3	241,3	108,0	31,8	63,5	9,5	73,0	41,9	29,4	5,0
	104,8	RA304	439	238,1	342,9	108,0	31,8	63,5	9,5	73,0	41,9	29,4	5,9
	155,6	RA306	652	288,9	444,5	108,0	31,8	63,5	9,5	73,0	41,9	29,4	6,8
55	54,0	RA552	386	171,5	225,4	133,4	34,9	79,4	6,4	95,3	71,2	50,1	7,3
	104,8	RA554	746	222,3	327,0	133,4	34,9	79,4	6,4	95,3	71,2	50,1	8,9
	155,6	RA556*	1.109	273,1	428,6	133,4	34,9	79,4	6,4	95,3	71,2	50,1	10,9
	254,0	RA5510*	**1.811**	**384,2**	**638,2**	133,4	34,9	79,4	6,4	95,3	71,2	50,1	**14,4**
100	54,0	RA1002	718	196,9	250,8	187,3	30,2	104,8	3,2	130,2	133,0	93,5	15,1
	158,8	RA1006*	2.116	298,5	457,2	187,3	30,2	104,8	3,2	130,2	133,0	93,5	22,6

* Equipped with carrying handles.

CYLINDER/PUMP MATCHING Page 6
ACCESSORY/REPAIR Page 36
PUMP/CYLINDER SETS Page 61
HYDRAULIC ACCESSORIES Page 120
VALVES Page 129
TECH DATA Page 231

Low profile
CYLINDERS RLS SERIES

5-150 Ton
Single-Acting, Spring-Return

Ideal for confined areas from 41 to 101,6 mm clearance.

CYLINDERS

RLS100

- Cylinder body, piston and gland nut "Power Tech" treated for corrosion and abrasion resistance (see page 8).
- Standard domed piston rod (5-30 ton) or swivel cap (50-150 ton) minimize effects of off-center loading.
- Unique heavy duty spring provides fast piston return.
- A 9796 3/8" NPTF female half coupler is standard with each cylinder (the RLS50 has a 3/8" coupler which is not angled). Oil ports are 3/8" NPTF (except the RLS50).
- Couplers on all cylinders, except RLS50, are angled upward for extra clearance.

ASME B30.1
700 BAR

RLS1000S



Base Mounting Holes
See Page 223

Cyl. Cap. (tons)	Stroke (mm)	Order No.	Oil Cap. (cm³)	A Retracted Height (mm)	B Extended Height (mm)	C1 & C2 Outside Dia. (mm)	F Base to Port (mm)	H Piston Rod Prod. Dia. (mm)	W	X	Y	Z	Bore Dia. (mm)	Cyl. Eff. Area (cm²)	Metric Tons at 700 bar	Weight (kg)
									Mounting Hole Location (mm)							
5	14,3	RLS50	10	41,3	55,6	41,3x65,1	19,1	15,9	19,1	28,6	6,4	25,4	28,6	6,4	4,5	1,0
10	11,1	RLS100	17	44,5	55,6	55,6x82,6	15,9	19,1	17,5	36,5	9,5	33,3	42,9	14,4	10,1	1,5
20	11,1	RLS200	33	50,8	61,9	76,2x101,6	16,7	28,6	18,3	49,2	13,5	39,7	60,3	28,6	20,1	2,5
30	12,7	RLS300	53	58,7	71,4	95,3x114,3	18,3	34,9	20,6	52,4	21,4	44,5	73,0	41,9	29,5	3,9
50	15,9	RLS500S	99	66,7	82,6	114,3x139,7	21,4	44,5	23,8	66,7	23,8	54,0	88,9	62,1	43,6	6,3
75	15,9	RLS750S	163	79,4	95,3	140,5x165,1	25,4	54,0	23,8	76,2	32,1	65,9	114,3	102,6	72,2	10,6
100	15,9	RLS1000S	202	85,7	101,6	152,4x177,8	25,4	63,5	20,6	76,2	38,1	71,4	127,0	126,6	89,1	13,6
150	14,3	RLS1500S	282	101,6	115,9	190,5x215,9	33,3	76,2	33,3	117,5	36,5	79,4	158,8	197,9	139,2	23,6

CYLINDER/PUMP MATCHING Page 6 | ACCESSORY/REPAIR Page 36 | PUMP/CYLINDER SETS Page 61 | HYDRAULIC ACCESSORIES Page 120 | VALVES Page 129 | TECH DATA Page 231

Shorty
CYLINDERS RSS SERIES

10-250 Ton
Single-Acting, Spring-Return & Double-Acting

Ideal for confined areas from 89 to 290,5 mm clearance.

CYLINDERS

- Power Tech plated piston rods and gland nuts resist scoring and corrosion.
- Heavy duty return spring (except for double-acting models) provides fast piston return & low collapsed height.
- Coupler on 10 thru 50 ton models is angled upward 5° for added clearance.
- Grooved piston top keeps load from sliding.
- Cylinders can be "dead-ended" at full capacity.
- Removable carrying handles on 100 ton and 250 ton models.

RSS2503

RSS302

ASME B30.1
700 BAR

Cribbing blocks are shown in a 30 ton RSS302 "Shorty" cylinder. For more information see pg 40.



Cyl Capacity (Tons)	Stroke (mm)	Order No.	Oil Cap. (cm³) Push	Oil Cap. (cm³) Return	A Retracted Height (mm)	B Extended Height (mm)	C Outside Dia. (mm)	F Base to Port (mm)	H Piston Rod Dia. (mm)	Bore Dia. (mm)	Cylinder Effective Area (cm²)	Metric Tons at 700 (bar)	Weight (kg)
10	38,1	RSS101	56	–	88,9	127,0	69,9	15,9	38,1	42,9	14,4	10,2	2,7
20	44,5	RSS202	126	–	95,3	139,7	90,5	15,9	54,8	60,3	28,6	20,0	4,5
30	61,9	RSS302	259	–	117,5	179,4	101,6	15,9	63,5	73,0	41,9	29,5	6,7
50	60,3	RSS502	374	–	127,0	187,3	123,8	19,1	79,4	88,9	62,0	43,6	10,5
100	57,2	RSS1002	725	–	139,7	196,9	168,3	23,8	111,1	127,0	126,6	89,1	21,4
100	38,1	RSS1002D	482	212	144,5	182,6	174,6	23,8 *	95,3	127,0	126,6	89,1	24,7
250	76,2	RSS2503	2.469	–	290,5	366,7	250,8	46,0	139,7	203,2	323,9	227,8	99,7

*Cylinder top to port is 40 mm

See pages 30-35 & 110-123 for hydraulic accessories.

CYLINDER/PUMP MATCHING Page 6 | ACCESSORY/REPAIR Page 36 | PUMP/CYLINDER SETS Page 61 | HYDRAULIC ACCESSORIES Page 120 | VALVES Page 129 | TECH DATA Page 231

Center Hole
CYLINDERS RH SERIES

10-100 Ton
Single-Acting, Spring-Return

Ideal for pulling and tensioning of cables, anchor bolts, forcing screws, etc.

CYLINDERS

- Interchangeable piston head inserts (see page 41) provide versatility of application.
- 12, 20*, 30*, 50, 60 Ton Single-Acting Models Feature Threaded Collar
- Withstands full "dead-end" loads.
- Corrosion resistant standpipe has "Power Tech" treatment.
- All cylinders except RH120 are furnished with a 9796 3/8" NPT female half coupler.
- Aluminum cylinder body and piston are featured on the RHA306 cylinder.

* Model RH203 and RHA306 do not feature the collar thread. See the chart below.

ASME B30.1
700 BAR

10, 20, 100 Ton Single-Acting Models Feature Plain Collar



Cyl. Cap. (tons)	Stroke (mm)	Order No.	Oil Cap. (cm³)	A Re-tracted Height (mm)	B Ex-tended Height (mm)	C Outside Dia. (mm)	D Collar Thread (in.)	E Collar Thread Length (mm)	F Base to Port (mm)	H Piston Rod Dia. (mm)	N Center Hole Dia. (mm)	O Insert Thread and Size (in.)	Mount. Holes Bolt Circle	Cylinder Effective Area (cm²)	Metric Tons at 700 bar	Weight (kg)
10	63,5	RH102	91	134,9	198,4	76,2	-	-	25,4	52,4	19,4	1 3/4-12	1/4-20 x 60,3	14,3	10,0	4,1
10	203,2	RH108	290	287,3	490,5	76,2	-	-	25,4	52,4	19,4	1 3/4-12	1/4-20 x 60,3	14,3	10,0	8,5
12	7,9	RH120**	14	55,6	63,5	69,9	2 3/4-16	31,8	9,5	34,9	17,5	3/4-16	5/16-18 x 50,8	17,8	12,5	1,4
12	41,3	RH121	74	122,2	163,5	69,9	2 3/4-16	31,8	25,4	34,9	20,2	-		17,8	12,5	3,0
12	41,3	RH121T**	74	122,2	163,5	69,9	2 3/4-16	31,8	25,4	34,9	17,5	3/4-16	5/16-18 x 50,8	17,8	12,5	3,0
12	76,2	RH123	136	184,2	260,4	69,9	2 3/4-16	20,6	25,4	34,9	20,6	-		17,8	12,5	4,0
20	50,8	RH202	155	155,6	206,4	98,4	3 7/8-12	38,1	25,4	54,0	27,4	1 9/16-16	3/8-16 x 82,6	30,4	21,4	7,3
20	76,2	RH203	193	154,0	230,2	101,6	-	-	25,4	69,9	26,6	2 1/4-12	3/8-16 x 82,6	25,3	17,8	9,1
20	152,4	RH206	465	308,0	460,4	98,4	3 7/8-12	38,1	25,4	54,0	27,4	1 9/16-16	3/8-16 x 82,6	30,4	21,4	13,7
30	63,5	RH302	260	158,8	222,3	120,7	4 3/4-12	38,1	29,4	82,6	32,9	2 3/4-12	7/16-20 x 92,1	40,9	28,8	11,6
30	149,2	RHA306	625	283,4	432,6	130,2	-	-	31,8	82,6	32,5	2 5/8-8	7/16-20 x 92,1	40,9	28,8	9,9
30	152,4	RH306	625	247,7	400,1	120,7	4 3/4-12	38,1	29,4	82,6	32,5	2 3/4-12		40,9	28,8	17,7
50	76,2	RH503	534	181,0	257,2	152,4	6-12	50,8	31,8	104,8	42,5	3 1/4-12	5/8-18 x 120,7	70,0	49,3	21,2
60	76,2	RH603*	607	235,0	311,2	158,8	6 1/4-12	63,5	25,4	91,3	54,0	3-12	1/2-13 x 130,2	79,4	55,9	27,2
60	152,4	RH606*	1.211	311,2	463,6	158,8	6 1/4-12	63,5	25,4	91,3	54,0	3-12	1/2-13 x 130,2	79,4	55,9	35,4
100	76,2	RH1003*	1.014	254,0	330,2	212,7	-	-	31,8	127,0	79,4	4 1/8-12		133,0	93,5	52,2

*Supplied with carrying handles.

Aluminum

** RH120 and RH121T do not have an internal threaded insert, but do have a 3/4-16 internal thread. The RH120 inlet port is 1/4" NPTF.

Center Hole
CYLINDERS RH SERIES

30-200 Ton
Double-Acting

Ideal for pulling and tensioning of cables, anchor bolts, forcing screws.

CYLINDERS

- Interchangeable piston head inserts (see page 41) provide versatility of application.
- Built-in safety feature prevents over-pressurization of the retract circuit.
- Plated piston rod resists wear; superior packings provide high cycle life without leakage.
- Corrosion-resistant standpipe has "Power Tech" treatment (see page 8).
- Each cylinder has 9796 3/8" NPTF female half couplers. The 60 ton thru 200 ton steel models are equipped with removable carrying handles.

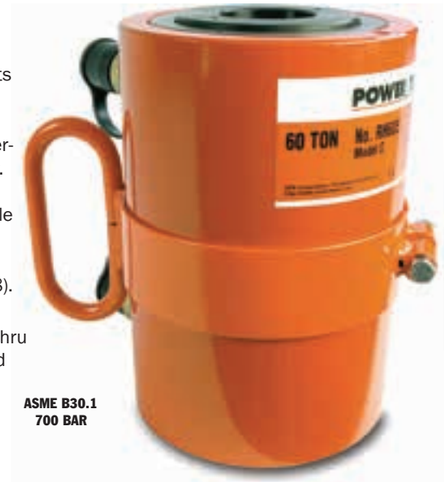

ASME B30.1
700 BAR



Cyl. Cap. (tons) Push	Cyl. Cap. (tons) Pull	Stroke (mm)	Order No.	Oil Cap. (cm³) Push	Oil Cap. (cm³) Pull	A Re-tracted Height (mm)	B Ex-tended Height (mm)	C Outside Dia. (mm)	D Collar Thread (in.)	E Collar Thread Length (mm)	F Base to Port (mm)	G Cylinder Top to Port (mm)	H Piston Rod Dia. (mm)	N Center Hole Dia. (mm)	Insert Thread Size (in.)	Mounting Holes (in.) and Bolt Circle (mm)	Cylinder Effective Area (cm²) Push	Cylinder Effective Area (cm²) Pull	Metric Tons at 700 bar Push	Metric Tons at 700 bar Pull	Weight kg)
30	15	76,2	RH303	289	167	179,4	255,6	120,7	-	-	25,4	41,3	63,5	32,5	2-12	3/8-16 x 92,1	38,0	21,8	26,8	15,3	13,5
30	15	152,4	RH306D	580	333	281,0	433,4	120,7	-	-	25,4	41,3	63,5	32,5	2-12	7/16-20 x 92,1	38,0	21,8	26,8	15,3	20,4
30	20	257,2	RH3010	1.082	672	438,2	695,3	114,3	4 1/2-12	41	44,5	81,0	60,3	33,3	1 7/8-16	-	42,2	26,1	29,7	18,3	27,7
60	25	101,6	RHA604D	807	338	241,3	342,9	177,8	-	-	39,7	57,2	101,6	54,0	3-12	1/2-13 x 130,2	79,4	33,2	55,8	25,1	16,2
60	25	127,0	RH605*	1.009	423	241,3	368,3	165,9	-	-	25,4	44,5	101,6	54,0	3-12	1/2-13 x 130,2	79,4	33,2	55,8	25,1	33,1
60	40	257,2	RH6010*	2.181	1.427	458,8	716,0	158,8	6 1/4-12	47,6	54,0	81,8	92,1	54,4	3-16	-	84,8	55,4	59,6	38,9	54,5
100	45	38,1	RH1001*	526	233	165,1	203,2	212,7	-	-	31,8	58,7	127,0	79,8	4-16	5/8-11 x 177,8	138,0	60,8	97,0	42,7	38,6
100	50	152,4	RH1006*	1.971	1.076	314,3	466,7	184,2	-	-	37,3	59,1	111,1	52,4	-	1/2-13 x 139,7	129,2	70,5	90,8	49,6	43,1
100	45	257,2	RH10010*	3.552	1.556	495,3	752,5	215,9	8 1/2-12	57	63,5	91,7	139,7	79,8	4 1/2-12	-	138,0	60,8	97,0	42,7	109,0
150	70	127,0	RH1505*	2.475	1.207	311,2†	438,2	215,9	-	-	37,3	68,3	139,7	65,1	-	-	194,1	94,8	136,9	66,8	67,2
150	75	203,2	RH1508*	3.929	2.086	349,3	552,5	247,7	-	-	39,3	61,1	152,4	80,2	5-12	-	193,2	102,6	135,9	72,1	103,1
200	75	203,2	RH2008*	5.307	2.093	408,0	611,2	273,1	-	-	57,2	81,8	190,5	103,2	6-12	1 1/4-12 x 198,1	260,9	102,9	183,5	72,4	142,0

* Supplied with carrying handles.
† Measured with 19 mm high serrated insert installed.
See pages 36-41 & 120-133 for hydraulic accessories.

Aluminum

CYLINDER/PUMP MATCHING Page 6
ACCESSORY/REPAIR Page 36
PUMP/CYLINDER SETS Page 61
HYDRAULIC ACCESSORIES Page 120
VALVES Page 129
TECH DATA Page 231

Center Hole
CYLINDERS RT SERIES

17½-100 Ton
Single- Acting, Spring-Return & Double-Acting

Ideal for pulling and pressing.

ASME B30.1
700 BAR

- A proven design; used throughout industry for over 40 years.
- Cylinders withstand full "dead-end" loads.
- Compact design; ideal for applications in which space is limited.
- Basic head can be changed from a tapped hole to plain hole by simply changing insert. (See page 41)
- Pistons have "Power Tech" treatment for corrosion and abrasion resistance.

RT 302



Dimensions for reference only.
Single-Acting, Spring-Return Cylinders

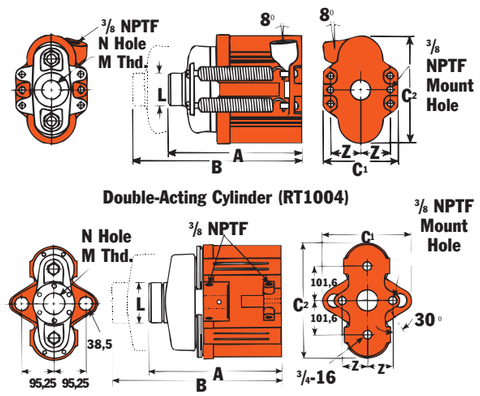

RT 302

Cyl. Capacity (Tons)	Stroke (mm)	Order No.	Oil Cap. (cm³) Push	Oil Cap. (cm³) Return	A Re-tracted Height (mm)	B Ex tended Height (mm)	C1 Out-side Dia. (mm)	C2 Out-side Dia. (mm)	L Load Cap Dia. (mm)	M Load Cap Thread (in.)	N Center Hole Dia. (mm)	Z Mounting Hole Location (mm)	Mounting Hole (mm)	Cyl. Eff. Area (cm²)	Metric Tons at 700 bar	Weight (kg)
17,5	50,8	RT172	116	-	174,6	225,4	95,3	146,1	44,5	1-8	27,0	38,1	8,7	22,8	16,1	6,6
30	63,5	RT302	258	-	214,3	277,8	108,0	190,5	57,2	1 1/4-7	32,9	46,0	11,9	40,5	28,5	12,8
50	76,2	RT503	482	-	268,3	344,5	149,2	238,1	73,0	1 5/8-5 1/2	42,5	60,3	16,7	63,3	44,5	25,4
100	123,8	RT1004**	1.583	1.037	384,2	508,0	266,7	336,6	120,7	2 1/2-8	65,1	73,0	19,8	124,1*	87,3	72,6

* Push side only.
** The RT1004 has a bypass when full stroke is reached, preventing over-pressurization of the cylinder.

NOTE: Each cylinder complete with threaded cylinder head insert, cylinder half coupler and cylinder attaching screws.

CYLINDER/PUMP MATCHING Page 6 | ACCESSORY/REPAIR Page 36 | PUMP/CYLINDER SETS Page 61 | HYDRAULIC ACCESSORIES Page 120 | VALVES Page 129 | TECH DATA Page 231

Pulling
CYLINDERS RP SERIES

2 & 5 Ton
Single-Acting, Spring-Return

Designed for pulling and tensioning.

ASME B30.1
700 BAR

- Heavy duty compression spring provides long cycle life and rapid extension of piston.
- Spring automatically extends piston rod when pump pressure is released.

RP25

RP55

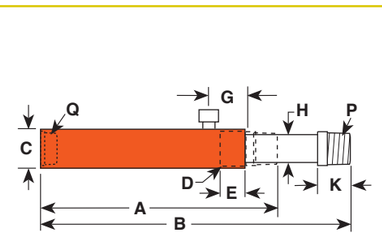

Cyl. Cap. (Tons) Pull	Stroke (mm)	Order No.	Oil Cap. (cm³)	A Re-tracted Height (mm)	B Ex-tended Height (mm)	C Outside Dia. (mm)	D Collar Thread (in.)	E Collar Thread Length (mm)	G Cylinder Top to Port (mm)	H Piston Rod Dia. (mm)	K Piston Rod Protrusion (mm)	P Piston Rod Thread (NPTF)	Q Base Thread (NPTF)	Bore Dia. (mm)	Cyl. Eff. Area (cm²) Pull	Metric Tons at 700 bar Pull	Weight (kg)
2	127,0	RP25	45	242,9	379,9	44,5	1 1/2-16	25,4	42,9	19,1	25,4	3/4-14	3/4-14	28,6	3,5	2,5	1,8
5	139,7	RP55	102	301,6	441,3	57,2	2 1/4-14	25,4	42,9	30,2	34,9	1 1/4-11 1/2	1 1/4-11 1/2	42,9	7,3	5,1	5

Clevis



Clevis ORDERING INFORMATION

Use with Cyl No.	Order No.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
RP25	421057*	130,3	109,5	33,3	50,8	19,1
RP55	421056**	152,4	127,0	38,1	63,5	22,4

* For base mounting, extension rod 351106 is required.
** For base mounting, extension rod 351075 is required.

CYLINDER/PUMP MATCHING Page 6 | ACCESSORY/REPAIR Page 36 | PUMP/CYLINDER SETS Page 61 | HYDRAULIC ACCESSORIES Page 120 | VALVES Page 129 | TECH DATA Page 231

Double Acting
CYLINDERS RD SERIES

10-500 Ton
Double Acting,
Hydraulic-Return

High tonnage premium design
for high cycle life.

CYLINDERS

- Perfect for bridge lifting, building reconstruction, shipyard, utility and mining equipment maintenance.
- Aluminum bronze overlay bearings provide long life, chrome plated piston rod resist corrosion.
- Load cap snaps out to expose internal piston rod threads for pulling applications; threads withstand full tonnage.
- Grooved ring pattern in load cap helps guard against load slippage.
- Each cylinder has two 9796 3/8" NPTF female half couplers.
- Built-in safety relief valve prevents over-pressurization of the retract circuit.
- Feature mounting holes and collar threads.

RD556

RD10013

ASME B30.1
700 BAR

RD30013

CYLINDER/PUMP MATCHING Page 6 | ACCESSORY/REPAIR Page 36 | PUMP/CYLINDER SETS Page 61 | HYDRAULIC ACCESSORIES Page 120 | VALVES Page 129 | TECH DATA Page 231

Four special ordered 500 ton, 610 mm stroke cylinders used in a swaging press for crimping 89 mm wire rope.

Features of RD Series Cylinders

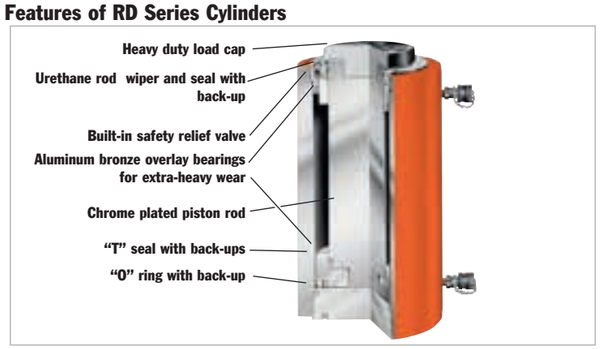





Base mounting holes see page 233.

Threads withstand full load.



Cyl. Cap. (tons) Push	Cyl. Cap. (tons) Pull	Stroke (mm)	Order No.	Oil Capacity (cm³) Push	Oil Capacity (cm³) Pull	A Retracted Height (mm)	B Extended Height (mm)	C Outside Dia. (mm)	D Collar Thread Size (in.)	E Thread Length (mm)	F Base to Port Trusion (mm)	G Cylinder Piston Top to Port (mm)	H Piston Rod Dia. (mm)	J Rod Int. (in) and Depth (mm)	K Piston Rod Protrusion (mm)	Load Cap Dia. (mm)	Bore Dia. (mm)	Cyl. Eff. Area (cm²) Push	Cyl. Eff. Area (cm²) Pull	Metric Tons at 700 bar Push	Metric Tons at 700 bar Pull	Weight (kg)
10	4	158,8	**RD106**	228	90	296,9	455,6	76,2	2 3/4-12	41,3	25,4	63,5	33,3	1-8 x 25,4	6,4	34,9	42,9	14,4	5,7	10,2	4,0	10,0
10	4	254,0	**RD1010**	366	144	398,5	652,5	76,2	2 3/4-12	41,3	25,4	63,5	33,3	1-8 x 25,4	6,4	34,9	42,9	14,4	5,7	10,2	4,0	12,7
25	8	158,8	**RD256**	528	166	314,3	473,1	101,6	4-12	41,3	25,4	63,5	54,0	1 1/2-16 x 25,4	9,5	54,0	65,1	33,2	10,4	23,4	7,3	18,1
25	8	362,0	**RD2514**	1.205	376	517,5	879,5	101,6	4-12	41,3	25,4	63,5	54,0	1 1/2-16 x 25,4	9,5	54,0	65,1	33,2	10,4	23,4	7,3	29,5
55	28	158,8	**RD556**	1.132	577	329,4	488,2	127,0	5-12	41,3	33,3	63,5	66,7	1 11/16-8 x 30,2	15,9	66,7	95,3	71,2	36,3	50,1	25,6	27,9
55	28	333,4	**RD5513**	2.376	1.212	504,0	837,4	127,0	5-12	41,3	33,3	63,5	66,7	1 11/16-8 x 30,2	15,9	66,7	95,3	71,2	36,3	50,1	25,6	40,9
55	28	460,4	**RD5518**	3280	1.673	657,2	1.117,6	127,0	5-12	41,3	33,3	63,5	66,7	1 11/16-8 x 30,2	15,9	66,7	95,3	71,2	36,3	50,1	25,6	64,5
80	44	333,4	**RD8013**	3421	1.901	517,5	850,9	146,1	5 3/4-12	41,3	38,1	63,5	76,2	2-4 1/2 x 38,1	14,3	73,0	114,3	102,6	57,0	72,1	40,1	53,6
100	44	168,3	**RD1006**	2.242	959	350,0	518,3	174,6	6 7/8-12	41,3	38,1	63,5	98,4	2 3/4-12 x 29,4	15,9	98,4	130,2	133,1	57,0	93,5	40,1	57,2
100	44	333,4	**RD10013**	4.440	1.902	515,1	848,5	174,6	6 7/8-12	41,3	38,1	63,5	98,4	2 3/4-12 x 29,4	15,9	98,4	130,2	133,1	57,0	93,5	40,1	82,2
100	44	511,2	**RD10020**	6.809	2.919	718,3	1.229,5	174,6	6 7/8-12	41,3	38,1	63,5	98,4	2 3/4-12 x 29,4	15,9	98,4	130,2	133,1	57,0	93,5	40,1	118,0
150	73	168,3	**RD1506**	3.334	1.606	377,8	546,1	209,6	8 1/4-12	41,3	50,8	63,5	114,3	3 1/4-8 x 38,1	20,6	114,3	158,8	197,9	95,3	139,1	66,9	85,4
150	73	333,4	**RD15013**	6.604	3.180	542,9	876,3	209,6	8 1/4-12	41,3	50,8	63,5	114,3	3 1/4-8 x 38,1	20,6	114,3	158,8	197,9	95,3	139,1	66,9	123,5
150	73	460,4	**RD15018**	9.132	4.392	673,9	1.134,3	209,6	8 1/4-12	41,3	50,8	63,5	114,3	3 1/4-8 x 38,1	19,1	114,3	158,8	197,9	95,3	139,1	66,9	170,7
200	113	168,3	**RD2006**	4.485	2.457	406,4	574,7	241,3	9 1/2-12	41,3	63,5	68,3	123,8	3 1/4-8 x 57,1	27,0	114,3	184,2	266,3	145,9	187,2	102,6	118,9
200	113	333,4	**RD20013**	8.886	4.869	571,5	904,9	241,3	9 1/2-12	41,3	63,5	68,3	123,8	3 1/4-8 x 57,1	27,0	114,3	184,2	266,3	145,9	187,2	102,6	161,6
200	113	460,4	**RD20018**	12.270	6.722	723,9	1.184,3	241,3	9 1/2-12	41,3	63,5	68,3	123,8	3 1/4-8 x 57,1	27,0	114,3	184,2	266,3	145,9	187,2	102,6	200,7
300	147	152,4	**RD3006**	5.920	2.903	488,9	591,3	273,1	10 1/2-12	60,3	85,7	85,7	158,8	2 1/2-12 x 82,5	28,6	174,6	222,3	387,8	190,0	272,7	133,6	172,5
300	147	330,2	**RD30013**	12.825	6.281	630,2	960,4	273,1	10 1/2-12	60,3	85,7	85,7	158,8	2 1/2-12 x 82,5	28,6	174,6	222,3	387,8	190,0	272,7	133,6	296,9
400	186	152,4	**RD4006**	7.724	4.051	489,7	642,1	320,7	12 1/2-8	69,9	97,6	97,6	184,2	3-12 x 92,2	31,8	198,4	254,0	506,6	240,3	356,2	169,0	265,6
400	186	330,2	**RD40013**	16.744	8.790	667,5	997,7	320,7	12 1/2-8	69,9	97,6	97,6	184,2	3-12 x 92,2	31,8	198,4	254,0	506,6	240,3	356,2	169,0	349,6
500	245	152,4	**RD5006**	9.774	4.838	522,3	674,7	374,7	14 3/4-8	79,4	105,6	105,6	203,2	3 1/4-12 x 107,9	38,1	215,9	285,8	641,1	317,0	450,8	222,8	371,8
500	245	330,2	**RD50013**	21.189	10.480	700,1	1.030,3	374,7	14 3/4-8	79,4	105,6	105,6	203,2	3 1/4-12 x 107,9	38,1	215,9	285,8	641,1	317,0	450,8	222,8	495,8

CYLINDER/PUMP MATCHING Page 6 | ACCESSORY/REPAIR Page 36 | PUMP/CYLINDER SETS Page 61 | HYDRAULIC ACCESSORIES Page 120 | VALVES Page 129 | TECH DATA Page 231

High Tonnage
CYLINDERS R SERIES

55-565 Ton
Single-Acting
Load-Return

High-tonnage, low cycle, gravity return.

CYLINDERS

R2802C

ASME B30.1
700 BAR



- Visible indicator band alerts when stroke limit is reached; overflow port ("weep hole") stroke limiter prevents piston from being overextended.
- Alloy heat treated piston and body for reliability and strength.
- Plated piston rod increase corrosion resistance and give superior bearing qualities.

Cyl. Cap. (tons)	Stroke (mm)	Order No.	Oil Cap. (cm³)	A Retracted Ht. (mm)	B Extended Ht. (mm)	C Outside Dia. (mm)	F Base to Port (mm)	H Piston Rod Dia. (mm)	K Rod Protrusion (mm)	Piston Bore Dia. (mm)	Effective Area (cm²)	Metric Tons at 700 bar	Weight (kg)
55	50,8	**R552C**	362	125,4	176,2	127,0	25,4	95,3	3,2	95,3	71,2	50,1	12,3
55	152,4	**R556C**	1.087	227,0	379,4	127,0	25,4	95,3	3,2	95,3	71,2	50,1	22,7
55	254,0	**R5510C**	1.811	328,6	582,6	127,0	25,4	95,3	3,2	95,3	71,2	50,1	32,7
100	50,8	**R1002C**	677	139,7	190,5	165,1	25,4	130,2	3,2	130,2	133,1	93,6	23,6
100	152,4	**R1006C**	2.030	241,3	393,7	165,1	25,4	130,2	3,2	130,2	133,1	93,6	40,4
150	50,8	**R1502C**	1.007	161,9	212,7	204,8	31,8	158,8	3,2	158,8	197,9	139,1	41,8
150	152,4	**R1506C**	3.019	263,5	415,9	204,8	31,8	158,8	3,2	158,8	197,9	139,1	68,6
150	254,0	**R15010C**	5.032	365,1	619,1	204,8	31,8	158,8	3,2	158,8	197,9	139,1	95,3
200	50,8	**R2002C**	1.355	190,5	241,3	235,0	41,3	184,2	3,2	184,2	266,3	187,2	65,8
200	152,4	**R2006C**	4.062	292,1	444,5	235,0	41,3	184,2	3,2	184,2	266,3	187,2	100,3
280	50,8	**R2802C**	1861	190,5	241,3	260,4	41,3	215,9	3,2	215,9	365,9	257,5	91,6
280	152,4	**R2806C**	5583	292,1	444,5	276,2	41,3	215,9	3,2	215,9	365,9	257,5	136,7
355	50,8	**R3552C**	2.326	231,8	282,6	298,5	54,0	241,3	3,2	241,3	457,2	321,4	137,1
355	152,4	**R3556C**	6.975	333,4	485,8	298,5	54,0	241,3	3,2	241,3	457,2	321,4	197,0
355	254,0	**R35510C**	11.624	435,0	689,0	298,5	54,0	241,3	3,2	241,3	457,2	321,4	256,5
430	50,8	**R4302C**	2.841	263,5	314,3	330,2	63,5	266,7	3,2	266,7	558,5	392,7	199,8
430	152,4	**R4306C**	8.520	365,1	517,5	330,2	63,5	266,7	3,2	266,7	558,5	392,7	276,5
565	50,8	**R5652C**	3.710	292,1	342,9	377,8	69,9	304,8	3,2	304,8	729,5	512,9	289,7
565	152,4	**R5656C**	11.129	393,7	546,1	377,8	69,9	304,8	3,2	304,8	729,5	512,9	389,5
565	254,0	**R56510C**	18.548	495,3	749,3	377,8	69,9	304,8	3,2	304,8	729,5	512,9	489,4

SWIVEL CAPS
Reduce the effects of off center loading. Tilts up to 5 degrees. Radial grooves on top of cap reduce load slippage.

For use with "RC" cylinders

Use with Cyl. No.	Swivel Cap Order No.	Weight (kg)	A (mm)	B (mm)
150-200 ton	420867	4,0	38,1	130,2
280 ton	420868	6,1	44,5	149,2
355 ton	420869	16,8	69,9	195,3
430 ton	420870	23,6	79,4	225,4
565 ton	420871	35,4	92,1	250,8



Reduce the effects of off center loading. Tilts up to 5 degrees. Radial grooves on top of cap reduce load slippage. Notch across face of each cap helps keep loads having a protruding or round shaped centered.

High Tonnage
CYLINDER RC SERIES

740 - 1220 Ton
Single-Acting,
Load Return

High-tonnage, low cycle, gravity return.

CYLINDERS

- Overflow port ("weep hole") prevents piston from being overextended under load.
- Alloy heat treated piston and body for reliability and strength.
- Plated piston rod increase corrosion resistance and give superior bearing qualities.

Single-Acting High Tonnage Cylinders

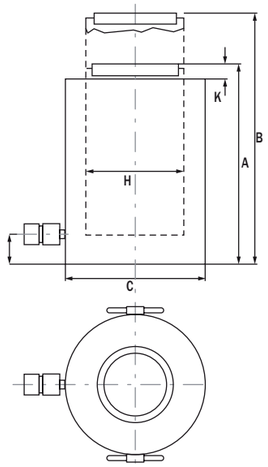

Swivel Cap

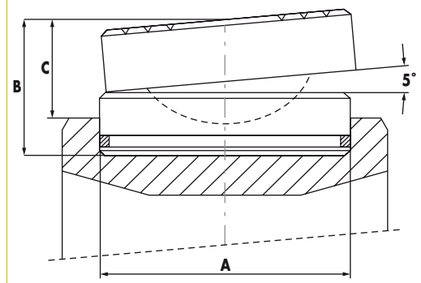

Order No.	Used with Cyl.	A mm	B mm	C mm	Product Wt. kg
2000822	RC740*C	200	79	56	19
2000823	RC965*C	249	104	76	40
2000825	RC1220*C	323	175	124	113

In mm Cyl. Cap. (tons)	Stroke (mm)	Order No.	Oil Cap. (cm³)	A Retracted Height (mm)	B Extended Height (mm)	C Outside Dia. (mm)	F Base to Port (mm)	H Piston Rod Dia. (mm)	K Piston Rod Protrusion (mm)	Bore Dia. (mm)	Cyl. Effective Area (cm²)	Metric Tons Tons @ 700 bar	Product Wt. (kg)
740	50	**RC7402C**	4.811	265	315	430	65	350	9	350	962	673,5	300
740	150	**RC7406C**	14.132	365	515	430	65	350	9	350	962	673,5	416
740	250	**RC74010C**	24.053	465	715	430	65	350	9	350	962	673,5	530
965	50	**RC9652C**	6.283	290	340	490	70	400	10	400	1.256,6	879,7	423
965	150	**RC9656C**	18.850	390	540	490	70	400	10	400	1.256,6	879,7	577
965	250	**RC96510C**	31.416	490	740	490	70	400	10	400	1.256,6	879,7	725
1220	50	**RC12202C**	7.952	415	465	550	80	450	10	450	1.590,4	1.113,3	766
1220	150	**RC12206C**	23.856	440	665	550	80	450	10	450	1.590,4	1.113,3	960
1220	250	**RC122010C**	39.761	615	865	550	80	450	10	450	1.590,4	1.113,3	1.147

CYLINDER/PUMP MATCHING Page 6
ACCESSORY/REPAIR Page 36
PUMP/CYLINDER SETS Page 61
HYDRAULIC ACCESSORIES Page 120
VALVES Page 129
TECH DATA Page 231

High Tonnage
CYLINDERS R SERIES

100-565 Ton
Double-Acting,
Hydraulic-Return

High-tonnage, low cycle, hydraulic return.

CYLINDERS

- Cylinders come standard with swivel caps to reduce the effects of off-center loading.
- Cylinders may be “dead-ended” without damage.
- Hard chrome plated, heat treated piston rod reduces wear on piston and gland nut.
- Built-in safety relief valve prevents over-pressurization of the retract circuit.
- Each cylinder has two 9796 3/8” NPTF female half couplers.

R1502D

R2806D



Cyl. Cap. (tons)	Stroke (mm)	Order No.	Oil Capacity (cm³) Push	Oil Capacity (cm³) Return	A Re-tracted Height (mm)	B Ex-tended Height (mm)	C Outside Dia. (mm)	F Base to Port (mm)	G Cylinder Top to Port (mm)	H Piston Rod Dia. (mm)	K Piston Rod Protrusion (mm)	Bore Dia. (mm)	Cylinder Effective Area (cm²) Push	Metric Tons at 700 bar Push	Weight (kg)
100	50,8	**R1002D**	676	315	168,7	219,5	165,1	25,4	56,0	95,3	7,1	130,2	132,9	93,4	24,5
100	152,4	**R1006D**	2.027	945	270,3	422,7	165,1	25,4	56,0	95,3	7,1	130,2	132,9	93,4	36,8
100	254,0	**R10010D**	3.378	1.574	371,9	625,9	165,1	25,4	56,0	95,3	7,1	130,2	132,9	93,4	49,0
150	50,8	**R1502D**	1.007	485	188,9	239,7	204,8	31,8	57,2	114,3	7,5	158,8	198,0	139,1	43,1
150	152,4	**R1506D**	3.021	1.456	290,5	442,9	204,8	31,8	57,2	114,3	7,5	158,8	198,0	139,1	61,7
200	50,8	**R2002D**	1.355	643	206,8	257,6	235,0	41,3	58,7	133,4	8,7	184,2	266,4	187,2	61,7
200	152,4	**R2006D**	4.064	1.929	308,4	460,8	235,0	41,3	58,7	133,4	8,7	184,2	266,4	187,2	84,9
200	254,0	**R20010D**	6.773	3.214	410,0	664,0	235,0	41,3	58,7	133,4	8,7	184,2	266,4	187,2	108,5
280	50,8	**R2802D**	1861	774	233,8	284,6	276,2	47,6	65,5	165,1	10,3	215,9	365,7	257,3	99,4
280	152,4	**R2806D**	5.579	2.322	335,4	447,8	276,2	47,6	65,5	165,1	10,3	215,9	365,7	257,3	134,8
280	254,0	**R28010D**	9.299	3.870	437,0	691,0	276,2	47,6	65,5	165,1	10,3	215,9	365,7	257,3	170,7
355	50,8	**R3552D**	2.326	777	288,9	339,7	298,5	54,0	69,9	196,9	11,1	241,3	457,3	321,4	147,0
355	152,4	**R3556D**	6.977	2.332	390,5	542,9	298,5	54,0	69,9	196,9	11,1	241,3	457,3	321,4	191,1
430	50,8	**R4302D**	2.840	977	312,7	363,5	330,2	63,5	75,0	215,9	11,9	266,7	558,6	392,7	199,3
430	152,4	**R4306D**	8.521	2.932	414,3	566,7	330,2	63,5	75,0	215,9	11,9	266,7	558,6	392,7	253,3
430	254,0	**R43010D**	14.202	4.887	515,9	769,9	330,2	63,5	75,0	215,9	11,9	266,7	558,6	392,7	305,5
565	50,8	**R5652D**	3.710	1.260	345,3	396,1	377,8	69,9	81,4	247,7	13,9	304,8	729,5	512,9	281,0
565	152,4	**R5656D**	11.129	3.779	446,9	599,3	377,8	69,9	81,4	247,7	13,9	304,8	729,5	512,9	350,4
565	254,0	**R56510D**	18.548	6.298	548,5	802,5	377,8	69,9	81,4	247,7	13,9	304,8	729,5	512,9	420,4

High Tonnage
CYLINDER RC SERIES

740 & 1220
Double-Acting,
Hydraulic Return

High Tonnage Cylinders
Rugged And Reliable!

CYLINDERS

- Cylinders come standard with hardened caps.
- Otional swivel caps to reduce the effects of off-center loading.
- Cylinders may be “dead-ended” without damage.
- Safety relief valve prevents over-pressurization of the retract circuit.
- Each cylinder has two 9796 3/8” NPTF female half couplers.

Double-Acting High Tonnage Cylinders

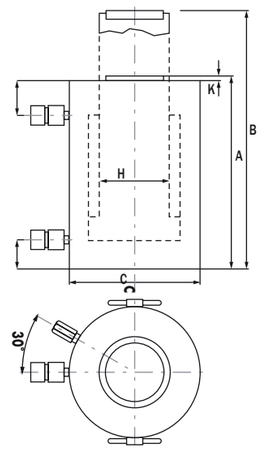

Swivel Cap

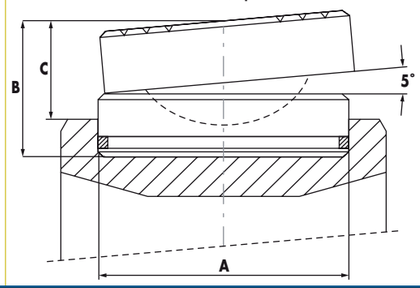

Order No.	Used with Cyl.	A mm	B mm	C mm	Product Wt. kg
2000822	**RC740*D**	200	79	56	19
2000823	**RC965*D**	249	104	76	40
2000825	**RC1220*D**	323	175	125	113

In mm Cyl. Cap. (tons)	Stroke (mm)	Order No.	Oil Cap. (cm³)	A Retracted Height (mm)	B Extended Height (mm)	C Outside Dia. (mm)	F Base to Port (mm)	G Cyl. Top to Port (mm)	H Piston Rod Dia. (mm)	K Piston Rod Protrusion (mm)	Cyl. Effective Area (cm²)	Metric Tons at 700 bar	Product Wt.
740	50	**RC7402D**	4.811	283	333	430	65	100	280	9	962,0	673,5	304
740	150	**RC7406D**	14.132	398	548	430	65	100	280	9	962,0	673,5	398
740	250	**RC74010D**	24.053	508	758	430	65	100	280	9	962,0	673,5	490
965	50	**RC9652D**	6.283	310	360	490	70	115	320	10	1.256,6	879,7	434
965	150	**RC9656D**	18.850	420	570	490	70	115	320	10	1.256,6	879,7	551
965	250	**RC96510D**	31.416	530	780	490	70	115	320	10	1.256,6	879,7	668
1220	50	**RC12202D**	7.952	330	380	550	80	135	360	10	1.590,4	1.113,3	584
1220	150	**RC12206D**	23.856	440	590	550	80	135	360	10	1.590,4	1.113,3	731
1220	250	**RC122010D**	39.761	550	800	550	80	135	360	10	1.590,4	1.113,3	878

CYLINDER/PUMP MATCHING Page 6
ACCESSORY/REPAIR Page 36
PUMP/CYLINDER SETS Page 61
HYDRAULIC ACCESSORIES Page 120
VALVES Page 129
TECH DATA Page 231

Locking Collar
CYLINDER RL SERIES– ALUMINUM

55 & 100 Ton
Single- Acting,
Spring-Return

Positive mechanical lock to support load.

CYLINDERS

Locking collar feature permits non-hydraulic support of load.

RA1006L

- Support lifted load for extended periods of time with hydraulic pressure released.
- At half the weight of steel cylinders of comparable capacity, aluminum cylinders are ideal when portability is a key factor.
- Feature carrying handle.

ASME B30.1
700 BAR

RA556L



Cyl. Cap. (tons)	Stroke (mm)	Order No.	Oil Cap. (cm³)	A Retracted Ht. (mm)	B Extended Ht. (mm)	C Outside Dia. (mm)	F Base to Port (mm)	H Piston Rod Dia. (mm)	K Piston Rod Protrusion (mm)	Nut Thickness (mm)	T Bore Dia. (mm)	Cylinder Effective Area (cm²)	Metric Tons at 700 bar	Weight (kg)
55	155,5	**RA556L**	1.109	317,5	473,1	133,4	34,9	82,6	12,7	38,1	95,3	71,2	50,1	13,4
100	158,8	**RA1006L**	2.116	339,7	498,5	187,3	30,2	114,3	6,4	38,1	130,2	133,0	93,5	29,1

Note: Supported loads not to exceed the rated capacity of the cylinders. Not intended to support additional dynamic loads, such as those applied by moving vehicles.

Pancake Cylinders
LOCKING COLLAR RC SERIES

55 & 620 Ton
Single- Acting,
Load-Return

Positive mechanical lock to support load.

CYLINDERS

- Compact design - for use where space is limited
- Locking collar designed to support lifted load for extended periods of time with hydraulic pressure relesed
- Integral tilt saddle standard improves performance under side load
- Overflow port ("weep hole") prevents piston from being overextended under load.
- Special coating improves corrosion and abrasion resistance.
- Cylinders come standard with hardened caps. Optional swivel caps reduce the effects of off-center loading Single-Acting Locking Collar Cylinders
- Equipped with 3/8" NPTF female half couplers



Metric Tons at 700 bar	Stroke (mm)	Order No.	Oil Cap. (cm³)	A Retracted Height (mm)	B Outside Dia. (mm)	C Piston Rod Dia. (mm)	D Bore Dia. (mm)	E Base to Port (mm)	F Nut Thickness (mm)	G Swivel Cap Protrusion (mm)	H Swivel Cap Dia. (mm)	Weight. (kg)
50	50	RC0552P	355	125	120	95	95	19	21	6	92	11
90	45	RC1002P	597	137	165	130	130	21	31	8	126	22
140	45	RC1552P	905	148	205	160	160	27	38	9	148	39
220	45	RC24022P	1.413	155	255	200	200	28	40	10	157	59
350	45	RC3802P	2.208	178	320	250	250	35	50	11	240	110
560	45	RC6202P	3.618	192	405	320	320	38	60	10	295	193

Locking Collar
CYLINDER RL SERIES STEEL

55 -565 Ton
Single- Acting, Load-Return

Positive mechanical lock to support load.

CYLINDERS

Locking collar feature permits non-hydraulic support of load.

- Support lifted load for extended periods of time with hydraulic pressure released.
- Visible indicator band alerts when stroke limit is reached; overflow port ("weep hole") stroke limiter prevents piston from being overextended.
- All cylinders feature coated pistons to resist corrosion and abrasion.

ASME B30.1
10,000 PSI

R556L



SWIVEL CAPS - For use with "RL" cylinders Reduce the effects of off center loading. Tilts up to 5 degrees. Radial grooves on top of cap reduce load slippage. Notch across face of each cap helps keep loads having a protruding or round shaped centered.



A (mm)	B (mm)	Use with Cyl. No.	Swivel Cap Order No.	Wt. (kg)
25,4	71,4	55-100 ton	420866	0,8
38,1	130,2	150-200 ton	420867	4,8
44,5	149,2	280 ton	420868	6,1
69,9	195,3	355 ton	420869	16,8
79,4	225,4	435 ton	420870	23,6
92,1	250,8	565 ton	420871	35,4

Cyl. Cap. (tons)	Stroke (mm)	Order No.	Oil Cap. (cm³)	A Retracted Ht. (mm)	B Extended Ht. (mm)	C Outside Dia. (mm)	F Base to Port (mm)	H Piston Rod Dia. (mm)	K Piston Rod Protrusion (mm)	T Nut Thickness (mm)	Bore Dia. (mm)	Cylinder Effective Area (cm²)	Metric Tons at 700 bar	Weight (kg)
55	50,8	**R552L**	362	161,9	212,7	125,4	25,4	95,3	3,2	36,5	95,3	71,2	50,1	15,3
55	152,4	**R556L**	1.087	263,5	415,9	125,4	25,4	95,3	3,2	36,5	95,3	71,2	50,1	26,3
55	254,0	**R5510L**	1.811	365,1	619,1	125,4	25,4	95,3	3,2	36,5	95,3	71,2	50,1	36,3
100	50,8	**R1002L**	677	184,2	235,0	165,1	25,4	130,2	3,2	44,5	130,2	133,1	93,4	30,0
100	152,4	**R1006L**	2.030	285,8	438,2	165,1	25,4	130,2	3,2	44,5	130,2	133,1	93,4	46,8
100	254,0	**R10010L**	3.383	387,4	641,4	165,1	25,4	130,2	3,2	44,5	130,2	133,1	93,4	64,5
150	50,8	**R1502L**	1.007	206,4	257,2	204,8	31,8	158,8	3,2	44,5	158,8	197,9	139,1	53,0
150	152,4	**R1506L**	3.019	308,0	460,4	204,8	31,8	158,8	3,2	44,5	158,8	197,9	139,1	80,4
200	50,8	**R2002L**	1.355	241,3	292,1	235,0	41,3	184,2	3,2	50,8	184,2	266,3	187,2	83,1
200	152,4	**R2006L**	4.062	342,9	495,3	235,0	41,3	184,2	3,2	50,8	184,2	266,3	187,2	117,6
280	50,8	**R2802L**	1.861	247,7	298,5	276,2	41,3	215,9	3,2	57,2	215,9	366,0	257,3	118,5
280	152,4	**R2806L**	5.583	349,3	501,7	276,2	41,3	215,9	3,2	57,2	215,9	366,0	257,3	163,0
280	254,0	**R28010L**	9.305	450,9	704,9	276,2	41,3	215,9	3,2	57,2	215,9	366,0	257,3	208,1
355	50,8	**R3552L**	2.326	292,1	342,9	298,5	54,0	241,3	3,2	60,3	214,3	457,2	321,4	173,0
355	152,4	**R3556L**	6.975	393,7	546,1	298,5	54,0	241,3	3,2	60,3	241,3	457,2	321,4	232,5
430	50,8	**R4302L**	2.841	333,4	384,2	330,2	63,5	266,7	3,2	69,9	266,7	558,5	392,7	252,4
430	152,4	**R4306L**	8.520	435,0	587,4	330,2	63,5	266,7	3,2	69,9	266,7	558,5	392,7	329,2
430	254,0	**R43010L**	14.201	536,6	790,6	330,2	63,5	266,7	3,2	69,9	266,7	558,5	392,7	405,9
565	50,8	**R5652L**	3.710	371,2	422,3	377,8	69,9	304,8	3,2	79,4	304,8	729,5	512,9	368,2
565	152,4	**R5656L**	11.129	473,1	625,5	377,8	69,9	304,8	3,2	79,4	304,8	729,5	512,9	468,0
565	254,0	**R56510L**	18.548	574,7	828,7	377,8	69,9	304,8	3,2	79,4	304,8	729,5	512,9	568,0

- **NOTE: Supported loads not to exceed the rated capacity of the cylinders. Not intended to support additional dynamic loads, such as those applied by moving vehicles.**

CYLINDER/PUMP MATCHING Page 6 | ACCESSORY/REPAIR Page 36 | LOAD CAPS Page 38 | PUMP/CYLINDER SETS Page 61 | HYDRAULIC ACCESSORIES Page 120 | VALVES Page 129 | TECH DATA Page 231

Locking Collar
CYLINDER RC SERIES

740 & 1220
Single-Acting, Load Return

Positive mechanical lock to support load.

CYLINDERS

Single-Acting Locking Collar Cylinders

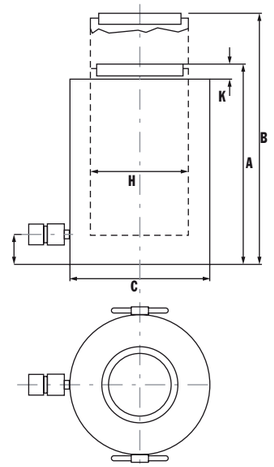

Swivel Cap

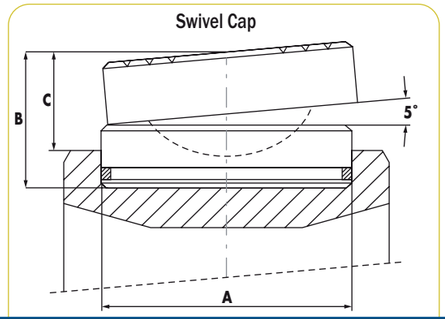

Order No.	Used with cyl.	A mm	B mm	C mm	Product Wt. kg
2000822	RC740*L	200	79	56	19
2000823	RC965*L	249	104	76	40
2000825	RC1220*L	323	175	125	113

Cyl. Cap. (tons)	Stroke (mm)	Order No.	Oil Cap. (mm³)	A Retracted Height (mm)	B Extended Height (mm)	C Outside Dia. (mm)	F Base to Port (mm)	H Piston Rod Dia. (mm)	K Piston Rod Protrusion (mm)	Bore Dia. (mm)	Cyl. Effective Area (mm²)	Metric Tons at 700 bar	Product Wt. (kg)
740	50	**RC7402L**	4.811	395	445	475	90	TR350X6	5	350	962,0	673,5	545
740	150	**RC7406L**	14.432	495	645	475	90	TR350X6	5	350	962,0	673,5	683
740	250	**RC74010L**	24.053	595	845	475	90	TR350X6	5	350	962,0	673,5	821
965	50	**RC9652L**	6.280	455	505	540	100	TR400X6	5	400	1.256,6	879,7	714
965	150	**RC9656L**	18.849	555	705	540	100	TR400X6	5	400	1.256,6	879,7	990
965	250	**RC96510L**	31.400	635	885	540	100	TR400X6	5	400	1.256,6	879,7	1.170
1220	50	**RC12202L**	7.949	443	493	600	110	TR450X6	5	450	1.590,4	1.113,3	969
1220	150	**RC12206L**	23.856,5	598	748	600	110	TR450X6	5	450	1.590,4	1.113,3	1.310
1220	250	**RC122010L**	39.741	698	948	600	110	TR450X6	5	450	1.590,4	1.113,3	1.530

Accessories
C SERIES

Mounting accessories
C Series

CYLINDERS

Threaded Connector



Cylinder Tons	Part No.	A (mm)	B (mm)	C (in)	D (mm)	E
5	**25748**	44,5	22,4	3/4-14 NSPM	4,8	12,7
10	**25664**	41,4	36,6	1 1/4-11 1/2 NSPM	7,9	14,2
25	**25654**	57,2	54,1	2-11 1/2 NSPM	9,7	16

Piston Clevis



Cylinder Tons	Part No.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
5**	**350095**	44,5	28,7	16	36,6	16	14,2
10 or 15**	**350094**	65	42,9	22,4	58,7	25,4	25,4
25**	**420059**	74,7	57,2	31,8	68,3	31,8	38,1

** Can be used with RD106, RD1010 Cylinder.



Support Base

Cylinder	Order	A (mm)	B (mm)	C (mm)
10	420062	**177,8**	**127**	**11,2**
25	420063	**177,8**	**127**	**11,2**

Threaded Adapter

Plain Adapter



Cylinder Tons	Part No.	A (mm)	B (mm)	C (mm)	D (in)	E
5	**202178** (threaded)	41,4	28,7	26,9	3/4-14 NPT	3/4-16UNF-2A
10 or 15	**202179** (threaded)	46,0	26,9	41,4	1 1/4-11 1/2-NPT	1-8UNC-2A
25	**202180** (threaded)	69,9	47,8	60,5	2-11 1/2-NPT	1 1/2-16UN-2A
10 or 15	**350724** (plain)	50,8	31,8	37,6	-	1-8UNC-2A
25	**350723** (plain)	54,1	31,8	57,2	-	1 1/2-16UN-2A



Cylinder Mounting Plate



Cylinder Tons	Part No.	A (mm)	B (mm)	C (mm)	D (in)	E (mm)
5	**350099**	76,2	25,4	54,1	1 1/2-16UN-2B	8,6
10	**350100**	88,9	25,4	66,8	2 1/4-14UNS-2B	8,6
15	**350184**	88,9	25,4	66,8	2 3/4-16UN-2B	8,6
25	**420064**	127	50,8	93	3 5/16-12UN-2B	16,8

Extension Rod



Cylinder Tons	Part No.	A (mm)	B (mm)	C (in)	D (mm)	E (mm)
5	**350895**	127	22,4	3/4-14 NPT	8,4	50,8
5	**38908**	254	22,4	3/4-14 NPT	8,4	50,8
5	**350896**	457,2	22,4	3/4-14 NPT	8,4	50,8
10	**350897**	127	36,6	1 1/4-11 1/2-NPT	8,4	50,8
10	**38909**	254	36,6	1 1/4-11 1/2-NPT	8,4	50,8
10	**350898**	457,2	36,6	1 1/4-11 1/2-NPT	8,4	50,8



Swivel Cap

Cylinder Tons	Part No.	A (mm)	B (mm)
10 or 15	350144	22,4	30,1
25	350145	28,7	50,8
55 or 75	350376	31,8	71,4
100	351574	48,5	88,1

Cylinder Base Attachment



Cylinder Tons	Part No.	A (mm)	B (mm)	C (in)	D (mm/in)
5†	208380	41,4	44,5	3/4-14NPSM	7,1Dia.(No.2) 1/4-20 UNC x3/4" Lg.Socket Head Cap Srews
10†	208381	47,8	63,5	1 1/4-11 1/2-NPSM	8,6 Dia.(No.2) 5/16-18 UNC x1" Lg. Socket Head Cap Screws
25†	208382	60,5	98,6	2-11 1/2-NPSM	13,5 Dia. (No.2) 1/2-13 UNC x 1" Lg. Socket Head Cap Screws



90° "V" Base

Cylinder Tons	Part No.	A (mm)	B (mm)	C (in)
5	**25388***	35,1	26,9	3/4-14-NPSM
10	**25395***	54,1	54,1	1 1/4-11 1/2-NPSM

Cylinder Flat Base

Cylinder Tons	Part No.	A (mm)	B (mm)	C (in)	D (mm)
5	**25750***	114,3	63,5	3/4-14-NPSM	34
10	**32325***	166,6	88,9	1 1/4-11 1/2-NPSM	36,6

Smooth Saddle

Serrated Saddle



Cylinder Tons	Part No.	A (mm)	B (mm)	C (in)
5	**25746* (serrated)**	28,7	33,3	3/4-14NPSM
10 or 15	**31772* (serrated)**	28,7	50,8	1 1/4-11 1/2-NPSM
25	**31776* (serrated)**	33,3	76,2	2-11 1/2-NPSM
5	**351575* (plain)**	28,7	33,3	3/4-14-NPSM
10	**24016* (plain)**	28,7	50,8	1 1/4-11 1/2-NPSM
25	**351576* (plain)**	33,3	76,2	2-11 1/2-NPSM



Plunger Base

Cylinder Tons	Part No.	A (mm)	B (mm)	C
25	25652	152,4	31,8	2-11 1/2-NPSM

Body Clevis†

Cylinder Tons	Part No.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
5	350096	52,3	28,7	16	16	14,2	6,4
10	350097	76,2	42,9	22,4	25,4	25,4	6,4
15	350098	77,7	42,9	22,4	25,4	25,4	6,4
25	420061	90,4	57,2	31,8	31,8	38,1	6,4

*** Items require threaded adapter (Page 36) when used with "C" series cylinders. They may be used on threaded "CBT" cylinders without the use of an adapter.**

† Mounting screws are included.

CYLINDERS

Swivel Caps
Center Hole Accessories





SWIVEL CAPS FOR "RSS",

Use with	Swivel Cap	Weight	A	B	C
RSS101	**350320**	0,2	25,4	36,5	36,5
RSS202	**350321**	0,6	34,9	54	54
RSS302	**350322**	0,7	34,9	63,5	54
RSS502	**350331**	1,2	36,5	82,6	54
RSS1002	**350332**	3,0	46	111,1	85,7
Tonnage		**"RA" Cylinders**			
55	**350376**	0,9	31,8	71,4	71,4
100	**350984**	2,5	49,2	95,3	79,4

SWIVEL CAPS FOR "RD" CYLINDERS

Cylinder	Swivel Cap	Weight	A	B	C
10	**350144**	0,4	22,2	36,5	21,8
25	**350145**	0,6	28,6	54	36,5
55	**351325**	1,9	61,9	63,5	39,3
100	**351324**	5,1	75,0	95,3	67,5
150	**351334**	5,8	66,7	111,1	77,8

SWIVEL CAPS

Reduce the effects of off center loading. Tilts up to 5 degrees. Radial grooves on top of cap reduce load slippage.

For use with "RC" cylinders

Use with Cyl. No.	Swivel Cap Order No.	Weight (kg)	A (mm)	B (mm)
150-200 ton	420867	4,0	38,1	130,2
280 ton	420868	6,1	44,5	149,2
355 ton	420869	16,8	69,9	195,3
435 ton	420870	23,6	79,4	225,4
565 ton	420871	35,4	92,1	250,8



For use with "RL" cylinders

A (mm)	B (mm)	Use with Cyl. No.	Swivel Cap Order No.	Wt. (kg)
25,4	71,4	55-100 ton	420866	0,8
38,1	130,2	150-200 ton	420867	4,8
44,5	149,2	280 ton	420868	6,1
69,9	195,3	355 ton	420869	16,8
79,4	225,4	435 ton	420870	23,6
92,1	250,8	565 ton	420871	35,4

Reduce the effects of off center loading. Tilts up to 5 degrees. Radial grooves on top of cap reduce load slippage.
Notch across face of each cap helps keep loads having a protruding or round shaped centered.

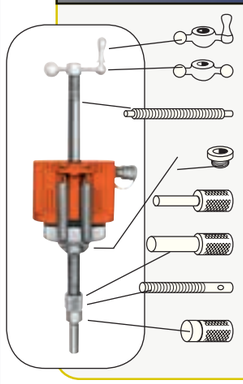

"CENTER-HOLE" CYLINDER ACCESSORIES

To use with Cyl. No		RT172, RH203	RT302, RH302 RH303, RH306	RT503, RH503, RH603 RH605, RH606	RT1004
Order Set No.		RHA20	RHA30	RHA50	RHA100
1 Speed Crank	1	**24814**	**27198**	**29595**	**303785**
2 Speed Nut	2	**302482** 1"-8	**302483** 1 1/4"-7	**33439** 1 5/8"-5 _"	**34136** 2 1/2"-8
3 Adjusting Screw	3	**32118** 1"–8 508 mm Lg.	**34758** 1 1/4"-7 x 609,6 mm Lg.	**32698** 1 5/8"-5 1/2"x 762 mm Lg.	**32699** 2 1/2 "-8 x 869,9 mm Lg.
4 Threaded Insert	4	**Order threaded insert for RH series cylinders with the accessory set.(See page 36/37) Threaded insert supplied with RT series cylinders.**			
5 Pushing Adapter	5	**201923** 1"-8, 12,7 mm dia. shank	**34510** 1 1/4"-7 x 19,1mm dia. shank	**34755** 1 5/8"-5 1/2" x 25,4 mm dia. shank	-
6 Pushing Adapter	6	**201454** 1"-8, 19,5 mm dia. shank	**34511** 1 1/4"-7 x 25,4 mm dia. shank	**34756** 1 5/8"-5 1/2" x 31,7 mm dia. shank	-
7 Jack Screw	7	**24813** 1"-8 x 177,8 mm Lg.	**25931** 1 1/4"-7 x 228,6 mm Lg.	**32701** 1 5/8"-5 1/2" x 279,4 mm Lg.	**32702** 2 1/2"-8 x 406,4 mm lg.
8 Screw Cap	8	**28228** 1"-8 x 38,1 mm dia.	**28229** 1 1/4"-7 x 44,4 mm dia	**28230** 1 5/8"-5 1/2" x 57,2 mm Lg.	-

Seal Kits

Cylinder Order No.	Seal Kit*	Viton Seal Kit
C51C	**300404**	**300210**
C53C	**300404**	**300210**
C55C	**300404**	**300210**
C57C	**300404**	**300210**
C59C	**300404**	**300210**
C101C	**300116**	**300211**
C102C	**300116**	**300211**
C104C	**300116**	**300211**
C106C	**300116**	**300211**
C108C	**300116**	**300211**
C1010C	**300116**	**300211**
C1012C	**300116**	**300211**
C1014C	**300116**	**300211**
C1016C	**300116**	**300211**
C151C	**300453**	**300471**
C152C	**300453**	**300471**
C154C	**300453**	**300471**
C156C	**300453**	**300471**
C158C	**300453**	**300471**
C1510C	**300453**	**300471**
C1512C	**300453**	**300471**
C1514C	**300453**	**300471**
C1516C	**300453**	**300471**
C251C	**300147**	**300213**
C252C	**300147**	**300213**
C254C	**300147**	**300213**
C256C	**300147**	**300213**
C258C	**300147**	**300213**
C2510C	**300147**	**300213**
C2512C	**300147**	**300213**
C2514C	**300147**	**300213**
C552C	**300114**	**300215**
C554C	**300114**	**300215**
C556C	**300114**	**300215**
C5510C	**300114**	**300215**
C5513C	**300114**	**300215**
C756C	**300647**	**300846**
C7513C	**300647**	**300846**
C1002C	**300112**	**300216**
C1006C	**300112**	**300216**
C10010C	**300112**	**300216**
C55CBT	**300404**	**300210**
C106CBT	**300116**	**300211**
C1010CBT	**300116**	**300211**
C256CBT	**300147**	**300213**
C2514CBT	**300147**	**300213**
R1502C	**300676**	—
R1506C	**300676**	—
R15010C	**300676**	—
R2002C	**300677**	—
R2006C	**300677**	—

Cylinder Order No.	Seal Kit*	Viton Seal Kit
R20010C	**300677**	—
R2802C	**300678**	—
R2806C	**300678**	—
R28010C	**300678**	—
R3552C	**300679**	—
R3556C	**300679**	—
R35510C	**300679**	—
R4302C	**300680**	—
R4306C	**300680**	—
R43010C	**300680**	—
R5652C	**300681**	—
R5656C	**300681**	—
R56510C	**300681**	—
R1002D	**300928**	—
R1006D	**300928**	—
R10010D	**300928**	—
R1502D	**300929**	—
R1506D	**300929**	—
R15010D	**300929**	—
R2002D	**300930**	—
R2006D	**300930**	—
R20010D	**300930**	—
R2802D	**300931**	—
R2806D	**300931**	—
R28010D	**300931**	—
R3552D	**300932**	—
R3556D	**300932**	—
R35510D	**300932**	—
R4302D	**300933**	—
R4306D	**300933**	—
R43010D	**300933**	—
R5652D	**300934**	—
R5656D	**300934**	—
R56510D	**300934**	—
R552L	**300674**	—
R556L	**300674**	—
R5510L	**300674**	—
R1002L	**300675**	—
R1006L	**300675**	—
R10010L	**300675**	—
R1502L	**300676**	—
R1506L	**300676**	—
R15010L	**300676**	—
R2002L	**300677**	—
R2006L	**300677**	—
R20010L	**300677**	—
R2802L	**300678**	—
R2806L	**300678**	—
R28010L	**300678**	—
R3552L	**300679**	—
R3556L	**300679**	—

Cylinder Order No.	Seal Kit*	Viton Seal Kit
R35510L	**300679**	—
R4302L	**300680**	—
R4306L	**300680**	—
R43010L	**300680**	—
R5652L	**300681**	—
R5656L	**300681**	—
R56510L	**300681**	—
RA202	**300631**	—
RA204	**300631**	—
RA206	**300631**	—
RA302	**300632**	—
RA304	**300632**	—
RA306	**300632**	—
RA552	**300391**	—
RA554	**300391**	—
RA556	**300391**	—
RA5510	**300391**	—
RA1002	**300444**	—
RA1006	**300444**	—
RA556L	**300395**	—
RA1006L	**300396**	—
RD106	**300017**	—
RD1010	**300017**	—
RD256	**300118**	—
RD2514	**300118**	—
RD556	**300005**	—
RD5513	**300005**	—
RD5518	**300005**	—
RD8013	**300410**	—
RD1006	**300006**	—
RD10013	**300006**	—
RD10020	**300006**	—
RD1506	**300007**	—
RD15013	**300007**	—
RD15018	**300007**	—
RD2006	**300008**	—
RD20013	**300008**	—
RD3006	**300466**	—
RD30013	**300466**	—
RD4006	**300467**	—
RD40013	**300467**	—
RD5006	**300468**	—
RD50013	**300468**	—
RH102	**300071**	**300221**
RH108	**300071**	**300221**
RH120	**300657**	—

Cylinder Order No.	Seal Kit*	Viton Seal Kit
RH121	**300576**	—
RH121T	**300576**	—
RH123	**300576**	—
RH202	**300615**	—
RH203	**300069**	**300222**
RH206	**300615**	—
RH302	**300037**	**300223**
RH306	**300037**	**300223**
RH503	**300059**	**300225**
RH603	**300477**	**300476**
RH606	**300477**	**300476**
RH1003	**300485**	**300585**
RH303	**300077**	**300224**
RH306D	**300822**	**300224**
RH3010	**300625**	—
RH605	**300269**	**300226**
RH6010	**300626**	—
RH1001	**300927**	—
RH1006	**300295**	**300227**
RH10010	**300629**	—
RH1505	**300154**	**300228**
RH1508	**300583**	—
RH2008	**300582**	—
RHA306	**300867**	**300868**
RHA604D	**300269**	**300226**
RLS50	**300454**	—
RLS100	**300455**	—
RLS200	**300456**	—
RLS300	**300457**	—
RLS500S	**300458**	—
RLS750S	**300459**	—
RLS1000S	**300460**	—
RLS1500S	**300461**	—
RP25	**300628**	—
RP55	**300627**	—
RSS101	**300010**	—
RSS202	**300011**	—
RSS302	**300297**	—
RSS502	**300292**	—
RSS1002	**300293**	—
RSS2503	—	—
RSS1002D	**300578**	—
RT172	**300358**	—
RT302	**300359**	—
RT503	**300360**	—
RT1004	**300024**	—

*** Nitrile seals come standard on all cylinders.**

Accessories

Cribbing Blocks

Convert Power Team "Shorty" cylinders to mechanical cribbing devices; more stable than timber or other awkward, makeshift methods. Ideal for lifting applications such as structure moving. Reduce cribbing time dramatically. In effect, increases the stroke of the cylinder; stacking pads act as cylinder extensions:

1. Extend cylinder and insert lower supporting ring.
2. Retract cylinder, insert a stacking pad.
3. Extend cylinder again; pad increases cylinder stroke.
4. Repeat process until all rings and pads are used.

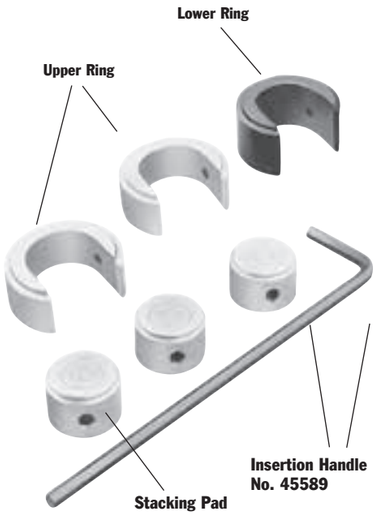

Each cribbing block set includes rings, pads and insertion handle.

No. CB30 — Cribbing block set for use with No. RSS302; 30 ton cylinder.
No. CB50 — Cribbing block set for use with No. RSS502; 50 ton cylinder.
No. CB100 — Cribbing block set for use with No. RSS1002; 100 ton cylinder.
No. 45589 — Insertion handle is used for inserting rings and pads.

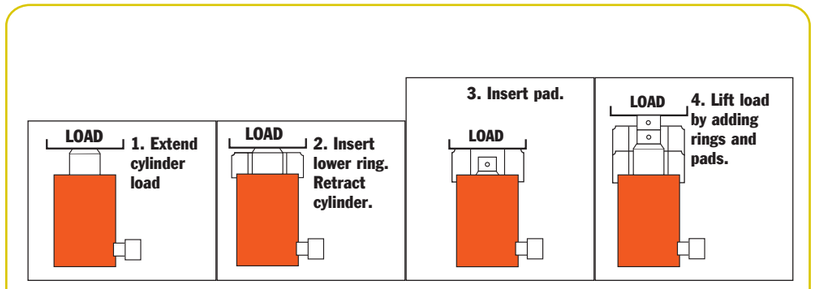

FOR USE WITH → / ORDER NUMBER →	30 TON CYLINDER NO. RSS302 / 30 TON SET NO. CB30			50 TON CYLINDER NO. RSS502 / 50 TON SET NO. CB50			100 TON CYLINDER NO. RSS1002 / 100 TON SET NO. CB100		
	Lower Ring	Upper Ring	Stacking Pad	Lower Ring	Upper Ring	Stacking Pad	Lower Ring	Upper Ring	Stacking Pad
No. included in set	1	2	3	1	2	3	1	2	3
Outside Diameter (mm)	114,3	114,3	69,9	139,7	139,7	85,7	187,7	187,7	120,7
Inside Diameter (mm)	71,4	71,4	—	87,7	87,7	—	122,2	122,2	
Height, each (mm)	57,9	45,6	45,2	56,4	43,7	42,8	54	44,5	43,7
Total stacked height of rings in Set (mm)		138,1			131,7			174,6	
Weight of Set (kg)		9,1			12,7			29	

Each set includes one Insertion Handle No. 45589 - 1/2" Hex. x 18" Long, 4" Bend

Accessories

Cylinder

CYLINDER LIFTING HANDLE

No. 4206550R9 — Lifting handle for "C" series, 25 ton cylinders.
No. 4213120R9 — Lifting handle for RH302, RH303, RH306 and RH306D, cylinders.
No. 252215 — Lifting handle RHA306, 30 ton cylinder.
No. 420496BK2 — Lifting handle RA552 and RA554, 55 ton cylinders.
No. 420498BK2 — Lifting handle RA1002, 100 ton cylinder.

ALUMINUM CYLINDER BASE



Aluminum Cylinder Base – For use when an enlarged cylinder base is needed or advantageous. Attaches to bottom of RA556, RA556L and RA5510 with four 3/8"–16 screws (included). Serrated base for extra stability.

No. 208406 – Aluminum cylinder base, 317 cm². For use with RA556, RA556L and RA5510 cylinders.

HEAD INSERTS FOR RH SERIES CYLINDERS

For Use With:	Threaded Insert Order No.
RH102, RH108	28632 3/4"–16
RH203	28612 1"–8
RH302, RH306	38904 1 1/4"–7
RH303	28644 1 1/4"–7
RH503	38855 1 5/8"–5 1/2
RH603, RH605 RH606	34251 1 5/8"–5 1/2

Quick-Change Inserts

"QUICK CHANGE" HEAD INSERTS FOR RT SERIES CYLINDERS

For Use With:	Threaded Order No.*	Plain Order No.
RT172	21669	21714
RT302	21873	21872
RT503	22274	22275
RT1004	24197	24196

Switch from a tapped hole to a plain hole quickly with these cylinder head inserts. They are held in place with a socket screw. Plain hole permits use of a speed nut for readjusting cylinder after extension.

*** Provided with cylinder**

PUMPS

HIGH PERFORMANCE PUMPS

Page ...44-47 PUMP SELECTION

Page VALVES...48-57

Page P SERIES...58-60 Hand Pumps

Page RPS SERIES...61 Cylinder and Pump Sets

Page PA6...62-63 Air Hydraulic

Page PA6D...64-65 Air Hydraulic

Page PA9...66 Air Hydraulic

Page PA60...68 Air Hydraulic

Page PA50...70 Air Hydraulic

Page PA17...72 Air Hydraulic

Page PA46/55...74 Air Hydraulic

Page PUA, PMA...76-79 Air Operated Pump

Page PE10...80 Electric Battery

Page PE17...82 Electric Hydraulic

Page PE18...84 Vanguard Jr.® Electric Hydraulic

Page PE21...86 Electric Hydraulic

Page PED...88 Electric Hydraulic

Page PE30...90 Vanguard® Electric Hydraulic

Page PE46...92 Electric Hydraulic

Page PE55...94 Vanguard® Electric Hydraulic

Page PE60...96 Air Hydraulic

Page PQ60...98 Quiet Electric Hydraulic

Page PQ120...100 Quiet Electric Hydraulic

Page PE400...102 Electric Hydraulic

Page PE-NUT...104 Electric Hydraulic

Page PG120...105 Gasoline Driven

Page PG30/55...106 Gasoline Driven

Page PG120-PG400...108 Gasoline Driven

Page INTENSIFIER...110

Page POWER TEAM PUSHES BRIDGE CONSTRUCTION...111

Page ASSEMBLE TO ORDER...112

Page PUMP ACCESSORIES...116

Pump Selection
HIGH PERFORMANCE

Choosing the Right Pump

Step 1 – Select the hydraulic cylinder that best suits the application. See pages 6-8.

Step 2 – Select the series of hydraulic pump with adequate oil output and reservoir capacity to power cylinder. See page 44-50. Check speed/selection chart on page 6.

Step 3 – Select pump within series with the valve option that is best suited to the cylinder and application. See pages 36-41.

CONSIDERATIONS:

What maximum system operating pressure (bar) is required?

What volume of oil delivery is required? (For manual pumps, cm³ of oil per handle stroke; for powered pumps, l./min. of oil).

Is a single- or 2-speed pump required? (2-speed pumps deliver high oil volume at low pressure for rapid cylinder piston advance, then shift to to the high pressure, low volume stage under load).

What is the preferred source of power?

a) Manual (hand or foot operated). Provides portability, can be used where electricity or shop air are not available.

b) Air/Hydraulic. Uses shop air or a portable air compressor.

c) Electric /Hydraulic. What voltage is available? Is a battery operated pump preferred?

d) Gasoline Engine/Hydraulic. Powers high-output pumps at remote job sites where air or electricity are unavailable.

Is portability of the pump a factor to consider?

Will the pump be used intermittently, or will it need to provide high-cycle operation? Does the application require that the pump be capable of starting under load?

Is fluid heat build-up a factor in your application? High cycle applications may require a larger capacity oil reservoir for cooling. Also, if you are using large displacement cylinders, the reservoir capacity must be sufficient to fully extend the piston of the cylinder.

Will the application require large displacement or multiple cylinders? Reservoir size and pump output levels will be factors to consider.

Does the working environment require a pump having a low operating noise (dBA) level?

Must the pump operate in a spark-free environment?

MANUALLY-OPERATED HYDRAULIC PUMPS:

P12, P23, P55 – These single-speed pumps are for use with single-acting cylinders. See page 58.

P19, P59, P59F, P157, P159, P300, P460 – These 2-speed pumps are used with single-acting cylinders. The 2-speed feature provides high oil volume for fast cylinder piston approach to the work; pump automatically shifts to the high pressure stage. This reduces the number of pump handle strokes required. See pages 59-60.

P157D, P159D, P300D, P460D – These 2-speed pumps are used with double-acting cylinders. See page 60.

AIR/HYDRAULIC PUMPS

Used where air is the preferred energy source or where electricity is not available. Ideal for use in petrochemical, mines or other inflammable or explosive environments.

PA6 Series – These single-speed pumps drive single- or double-acting cylinders. See pages 62-65.

PA9 Series – These new single-speed pumps drive single-acting cylinders and are ideal for powering portable hydraulic tools. See pages 66-67.

PA50 Series – These single-speed pumps drive single- or double-acting low pressure (225 bar) cylinders. See pages 70-71.

PA60 – This 2-speed pump is equipped with a manifold to operate multiple cylinders, and provides a 7,6 liter reservoir capacity. See pages 68-69.

PA64 – Similar to PA60, this 2-speed pump drives single- or double-acting cylinders. See pages 68-70.

PA172 and PA174 – These "economy" 2-speed pumps drive single- or double-acting cylinders, depending on the model chosen. Provide a low weight to output ratio. See pages 72-73.

PA462 and PA464 Series – These 2-speed pumps drive single or double-acting cylinders, depending on the model selected. They offer high speed cylinder piston advance. See pages 74-75.

PA554 – This 2-speed pump drives single- or double-acting cylinders, delivering a high volume of oil. See pages 72-74.

ELECTRIC/HYDRAULIC PUMPS

All of the following pumps are 2-speed models, and can be used to drive single- or double-acting cylinders.

"Quarter Horse" Series – As their name implies, these pumps feature a 0,18Kw (1/4 hp) electric motor. A battery-powered version is available. Having a low noise level and weighing just 9 kg, they are ideal for powering portable hydraulic spreaders, nut splitters, pipe flange spreaders and other tools. See pages 80-81.

PE17 Series – CSA rated for intermittent duty, these feature a 0,37Kw (1/2 hp), single phase induction motor with a low noise level (67-81 dBA). Smaller generators and low amperage circuits can be used as a power source. See pages 82-83.

PE46 Series – Powered by a 1,1Kw (1 1/2 hp), single phase induction motor, operate at a moderate noise level of 77-81 dBA. CSA rated for intermittent duty. See pages 92-93.

PE18 Series – CSA rated for intermittent duty, these feature a 0,37Kw (1/2 hp), single phase universal motor with a noise level of 85-90 dBA. Provide high performance at a low price. Has low amperage draw. See pages 84-85.

PE30 Series – Equipped with a 0,75Kw (1 hp), single phase permanent magnet motor, have a noise level of only 82-87 dBA. CSA rated for intermittent duty, and require a relatively low voltage; ideal for use in general construction applications. Roll cage/handle protects the motor and controls. See pages 90-91.

PE55 and PED25 Series – The famous Vanguard® pumps have been continually upgraded for 40 years; some of the originals are still in service! Equipped with a 0,83Kw (1 1/8 hp), single phase universal motor, have a high noise level (90-95 dBA). Offer the best weight to performance ratio of any Power Team electric/hydraulic pump. CSA rated for intermittent duty. The PED25 versions are "dual flow" pumps which deliver the same low and high pressures to both valves, and have a noise level of 80-85 dBA. They have a 1,1Kw (1 1/2 hp) induction motor.

See pages 88-89, 94-95.

CYLINDER/PUMP MATCHING Page 6 | CYLINDERS Page 14 | PUMP/CYLINDER SETS Page 61 | PUMP ACCESSORIES Page 116 | HYDRAULIC ACCESSORIES Page 120

Pump Selection
HIGH PERFORMANCE

Choosing the Right Pump

PE60 Series – The Vanguard® Supreme® pumps provide trouble-free service in the most severe working environments. Powered by a 0,82Kw (1⅛ hp), single phase motor, has a moderate noise level of 80-85 dBA. Start well under load even at the reduced voltages encountered on construction sites. High-output pumps, ideal for use with post-tensioning/pre-stressing jacks and other high-pressure hydraulic tools. See pages 96-97.

"Custom-built" pumps – Power Team offers you "assemble to order" electric/hydraulic pumps to suit unique applications. You can choose from pre-engineered, off the-shelf components to customize your pump. See pages 112-115.

PE21 Series – Ideal for heavy-duty, extended-cycle applications. Powered by a 0,75Kw (1 hp), single phase motor, pump operates a very low noise level of 70 dBA. Pump automatically shuts down in the event of a power failure. CSA rated for intermittent duty. See pages 86-87. "Quiet" Pumps. Our PQ60 and PQ120 series operate at a very low noise level of between 73-78 dBA. The PQ60 has a 1,5Kw (2 hp) (single phase) motor; the PQ120 has a 2,2Kw (3 hp) (3-phase) motor. These pumps are designed for heavy-duty, extended cycle operations. CSA rated for intermittent duty. See page 86.

PE400 Series – High-flow units deliver a large volume of high pressure oil for heavy construction and maintenance operations employing high tonnage cylinders. The PE400 is powered by a 7,5Kw (10 hp), 3-phase motor. Low noise rating of 73-80 dBA. See pages 102-103.

GASOLINE-DRIVEN HYDRAULIC PUMPS

These two-speed pumps are ideal for use in remote applications, such as construction sites. May be used with single- or double-acting cylinders.

PG30 Series – Powered by a 2-cycle, 1,5Kw (2 hp) Tecumseh engine, these have an integral, protective "roll cage" and adequate reservoir capacity for cylinders up to 100 tons capacity or more. Readily portable; popular in the railroad, rescue and construction markets. See pages 106-107.

PG55 Series – With a 4-cycle, 3Kw (4 hp) Briggs & Stratton engine, this pump is based on our popular Vanguard® Series. It has a generous five gallon reservoir capacity. See pages 106-107.

PG120 Series – Powered by a 4-cycle, 4,1Kw (5.5 hp) Honda engine. Has a 19 liter reservoir; capable of handling multiple-cylinder lifting tasks. Ideal for the structure moving, pier setting, bridge lifting and concrete contracting industries. See pages 108-109.

PG4004 – Featuring a 4-cycle, 13,5Kw (18 hp) Briggs & Stratton engine, this unit has a big 76 liter reservoir. Rugged steel "roll cage" has a hook on top and swivel casters for ease of mobility. Popular for concrete stressing applications. See pages 108-109.

HYDRAULIC INTENSIFIER

HB Series – Turns low pressure hydraulic pumps into high pressure power sources to operate single-acting or double-acting cylinders and tools such as crimpers, spreaders, cutters, etc. Compact and portable for use inside a utility vehicle aerial bucket or stowing in a vehicle. See page 110.

PUMPS

PUMP SELECTION

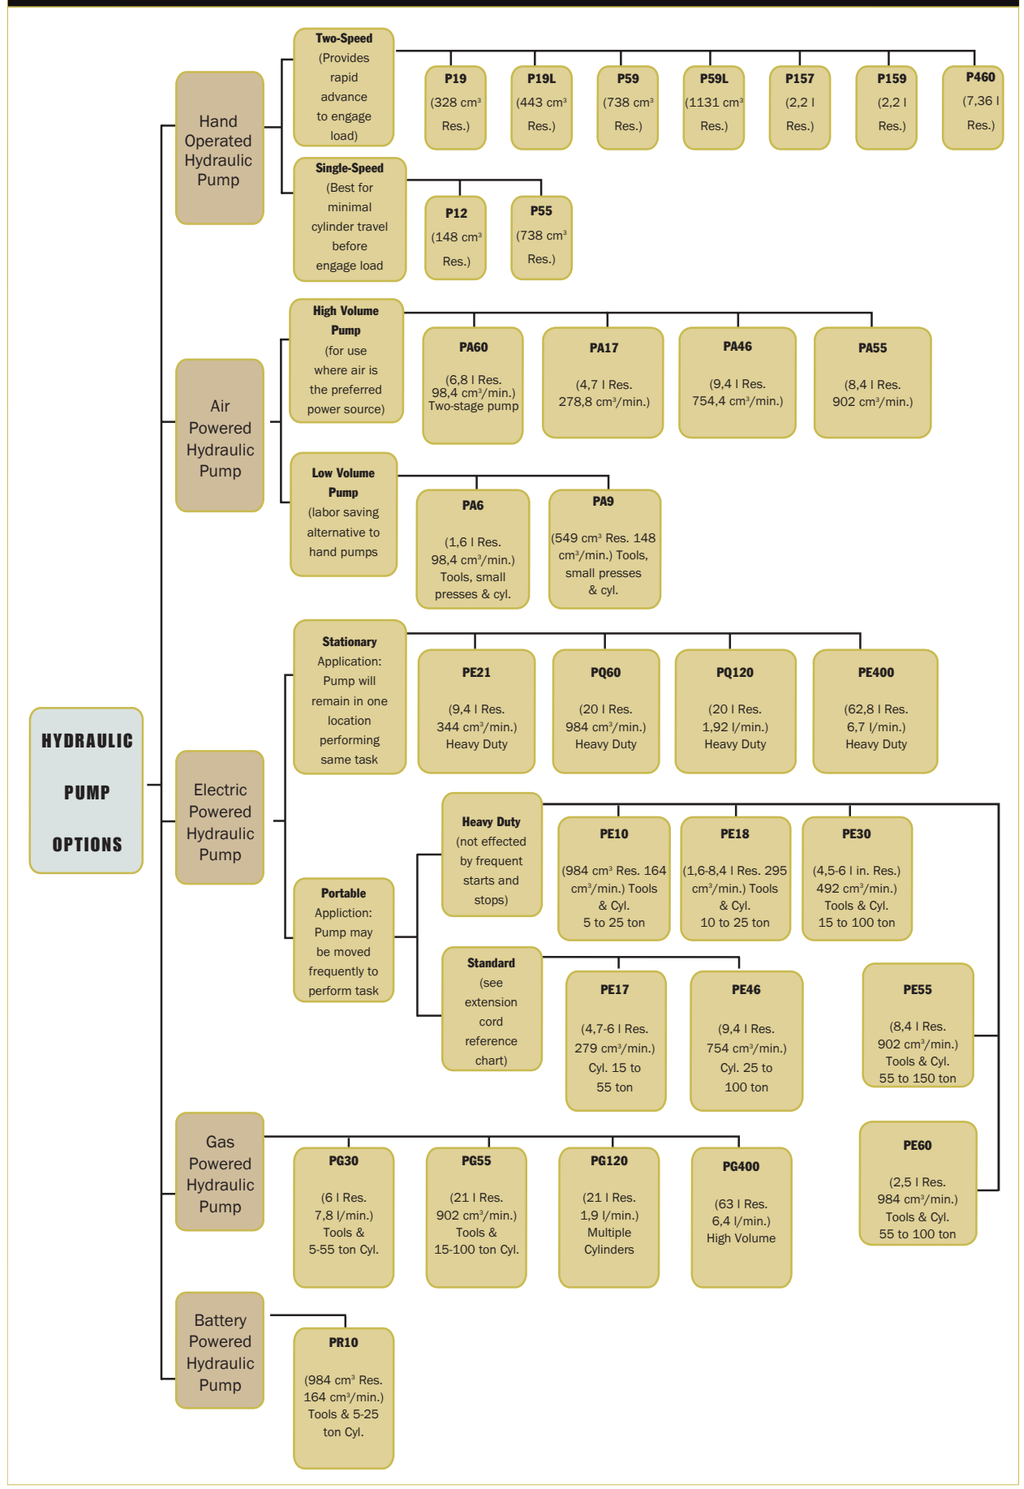

PUMPS

Valve Selection

Choosing the Right Valve

Step 1 - Select the hydraulic cylinder that best suits the application. See pages 6-8.

Step 2 - Select the series of hydraulic pump with adequate oil output and reservoir capacity to power cylinder. See pages 42-45. Check speed chart on page 6.

Step 3 - Select pump within series with the valve option that best matches cylinder, pump and application. See pages 122-127.

CONSIDERATIONS:

- Will the valve be used with single or double-acting cylinders?
- Will the valve be mounted on the pump, away from the pump or directly into the hydraulic lines?
- Will the valve be manually operated or is remote control preferred?
- Is independent control of multiple cylinders, or hydraulic tools preferred?
- What directional control and pressure control valve functions are needed for the application?

Basic valve types include manually operated, air or solenoid operated and pilot operated. Special application valves for pre-stressing and post-tensioning are also offered. Consult selection chart on page 50 for listings of all Power Team valves.

DIRECTIONAL CONTROL VALVES

2-WAY, 2-POSITION
(FOR CONTROL OF SINGLE-ACTING CYLINDERS):

POSITION 1	CENTER POSITION	POSITION 2
Oil goes from pump to cylinder; pressure is held from valve to cylinder when pump is shut off.	None	Oil goes from cylinder to pump; pressure is released to reservoir when motor is turned off.

3-WAY, 2-POSITION
(FOR CONTROL OF SINGLE-ACTING CYLINDERS)

POSITION 1	CENTER POSITION	POSITION 2
Oil goes from pump to cylinder and holds when pump is shut off. Return line to reservoir is blocked.	None	Cylinder retracts, oil returns to reservoir.

3-WAY, 3-POSITION
(FOR CONTROL OF SINGLE-ACTING CYLINDERS)

POSITION 1	CENTER POSITION	POSITION 2
Oil goes from pump to cylinder and holds when pump is shut off. Return line to reservoir is blocked.	Cylinder pressure is held; pump can remain running and oil returns to reservoir.	All oil is open to reservoir through return line.

IN-LINE HYDRAULIC VALVES

Load Lowering Valve – Provides precision metering for controlled return of the cylinder piston.

Sequence Valve – Used when a cylinder in a multiple cylinder application must advance before any other.

Pressure Reducing Valve – Permits independent pressure control to two or more clamping systems operated by a single power source.

Shut-off Valve – For fine metering of hydraulic oil. Several may be used to control multiple single-acting cylinders.

Check Valve – Permits flow of hydraulic oil in one direction only.

Pressure Relief Valve – Used at remote locations in a hydraulic circuit where maximum pressure requirements are less than the setting of the basic overload valve in the pump. Protects a hydraulic system against over pressurization.

Metering Valve – Restricts surges by restricting flow to a certain level; when flow subsides, valve reopens automatically. For systems using large cylinders or extended lengths of hose.

Pressure Regulator Valve – Permits external adjustment of operating pressures at various values below the internal relief valve setting of the pump.

DIRECTIONAL CONTROL VALVES

4-WAY, 2-POSITION
(FOR CONTROL OF SINGLE OR DOUBLE-ACTING CYLINDERS):

POSITION 1	CENTER POSITION	POSITION 2
Oil goes to the "extend" side of the cylinder. The oil from the "retract" side returns to reservoir. Cylinder holds with pump shut off.	None	Oil goes to the "retract" side of the cylinder, oil from the "extend" side returns to reservoir.

4-WAY, 3-POSITION
(FOR CONTROL OF DOUBLE-ACTING CYLINDERS)

POSITION 1	CENTER POSITION	POSITION 2
Oil goes to the "extend" side of the cylinder, oil from the "retract" side returns to reservoir. Cylinder holds with pump shut off.	Holds pressure even if pump is running. Oil from pump goes through valve, back to reservoir.	Oil goes to "retract" side of cylinder. Oil from "extend" side returns to the reservoir.

TYPICAL CENTERS

TANDEM CENTER	CLOSED CENTER	OPEN CENTER
Cylinder ports are blocked, oil from pump goes to reservoir. Used when pump remains running. Example: gasoline-driven pumps.	Generally used when running multiple valves in series from one pump.	Open Center used when holding is not a requirement, as when running two separate hydraulic tools such as cutters and crimpers.

Pump Mounted Valves



PUMP MOUNTED VALVES

Order No.	Page No.	*Cylinder Application	Operation	Valve Type	Volt	Advance/ Return	Advance/ Hold Return	Posi-Check® Feature
9500	53	S.A & D.A.	Manual	4-way, 3 Pos. Tandem Center	—	no	yes	no
9501	53	S.A. & D.A.	Manual	4-way, 3 Pos. Closed Center	—	no	yes	no
9502	52	S.A.	Manual	3-way, 3 Pos. Closed Ctr.	—	no	yes	yes
9504	51	S.A. & D.A.	Manual	3/4-way, 2 Pos.	—	yes	yes	no
9506	53	D.A.	Manual	4-way, 3 Pos. Tandem Center	—	no	yes	yes
9507	53	D.A.	Manual	4-way, 3 Pos. Closed Center	—	no	yes	yes
9511	53	S.A. & D.A.	Manual	4-way, 3 Pos. Open Center	—	yes	yes	no
9512	56	D.A.	Solenoid	4-way, 3 Pos. Tandem Center	24	no	yes	yes
9513	56	D.A.	Solenoid	4-way, 3 Pos. Tandem Center	115	no	yes	yes
9516	56	D.A.	Solenoid	4-way, 3 Pos. Tandem Center	12DC	no	yes	yes
9517	51	S.A.	Manual	2-way, 2 Pos.	—	no	yes	no
9519	56	D.A.	Solenoid	4-way, 3 Pos. Tandem Center	230	no	yes	yes
9520	52	S.A.	Manual	4-way, 3 Pos. Tandem Center	—	no	yes	yes
9522	56	D.A.	Solenoid	4-way, 3 Pos. Open Center	230	yes	no	no
9523	56	S.A.	Pilot Operated Solenoid	3-way, 2 Pos.	230	yes	no	no
9552	55	S.A. & D.A.	Solenoid	3/4-way, 2 Pos.	230	yes	no	no
9553	56	S.A.	Pilot Operated Solenoid	3-way, 2 Pos.	24	yes	no	no
9569	56	S.A.	Solenoid	3-way, 2 Pos.	24	no	yes	no
9570	56	S.A.	Solenoid	3-way, 2 Pos.	230	no	yes	no
9572	56	S.A. & D.A.	Solenoid	3/4-way, 2 Pos.	24	yes	no	no
9576	52	S.A.	Manual	3-way, 3 Pos. Metering Tandem Ctr.	—	no	yes	no
9579	55	S.A.	Solenoid	3-way, 2 Pos.	115	no	yes	no
9582	51	S.A.	Manual	3-way, 2 Pos.	—	no	yes	no
9584	51	S.A.	Manual	3-way, 2 Pos.	—	no	yes	no
9589	56	S.A.	Pilot Operated Solenoid	3-way, 2 Pos.	115	yes	no	no
9590	56	D.A.	Solenoid	4-way, 3 Pos. Open Center	115	yes	no	no
9592	55	S.A. & D.A.	Solenoid	3/4-way, 2 Pos.	115	yes	no	no
9594	55	S.A. & D.A.	Air	3/4-way, 2 Pos.	—	no	yes	yes
9599	54	S.A.	Pilot Operated Solenoid	3-way, 3 Pos. Tandem Center	24	no	yes	yes
9605	54	S.A.	Pilot Operated Solenoid	3-way, 3 Pos. Tandem Center	115	no	yes	yes
9609	54	S.A.	Manual	3-way, 3 Pos. Tandem Center	—	no	yes	no
9610	51	S.A.	Auto Pilot Operated	3-way, 2 Pos.	—	yes	no	no
9610A	51	S.A.	Manual	2/3-way, 2 Pos.	—	no	yes	no
9615	56	D.A.	Solenoid	4-way, 3 Pos. Open Center	24	yes	no	no
9628	57	S.A. & D.A.	Manual	Post Tensioning	—	special	no	no
9632	57	S.A. & D.A.	Manual	Post Tensioning	—	special	no	no

* "S.A." represents single-acting cylinders, "D.A." represents double-acting cylinders

CYLINDER/PUMP MATCHING Page 6 | CYLINDERS Page 14 | PUMP/CYLINDER SETS Page 61 | PUMP ACCESSORIES Page 116 | HYDRAULIC ACCESSORIES Page 120

Manual and Pilot Operated

700 bar, 3/8" ports, 19 l/min max flow rate.

3-WAY/2-POSITION MANUAL VALVES

Applications – Single-acting cylinders.
Actuation – Lever operated.
Functions – Cylinder piston "advance", "hold" and "return".
Used on these pumps – P460, PE17, PE21, PE30, PE46, PE55, PE84, PE90, and PE120 series.
No. 9582 – 3-way/2-position manual valve. Wt. 1,13 kg.
No. 9584 – Same as 9582, but has "flipper" control. Wt., 0,8 kg.

3-WAY/2-POSITION, PILOT OPERATED AUTOMATIC VALVE

Application – Single-acting cylinders. Actuation: Pilot oil.
Functions – When pump is started, pilot oil automatically closes valve and directs oil to cylinder; when pump is stopped, valve automatically opens and oil returns to reservoir.
Used on these pumps – Furnished with pilot lines and adapters for PA55, PA90, PE30, PE55, PE90 and PE120 series.
No. 9610 – 3-way/2-position pilot operated automatic valve. Wt., 1,9 kg.

2/3-WAY/2-POSITION MANUAL/PILOT OPERATED AUTOMATIC VALVE

Application – Manual operation for load lifting and holding with single-acting cylinders; automatic "dump" for operating hydraulic tools.
Actuation – Flipper lever/pilot oil.
Functions – With lever in closed position, valve will hold the load. When lever is "open", valve functions as a true automatic "dump" valve.
Used on these pumps – Furnished with pilot lines and adapters for PA55, PA90, PE30, PE55, PE90 and PE120 series. For application on other pumps, consult factory.
No. 9610A – 2/3-way/2-position manual/pilot operated automatic valve. Wt., 2 kg.

2-WAY/2-POSITION MANUAL VALVE

Application – Single-acting cylinders.
Actuation – Flipper lever operated.
Functions – Cylinder piston "advance", "hold" and "retract".
Used on these pumps – PE172, PA172 and PE84 series.
No. 9517 – 2-way/2-position manual valve. Wt., 1,45 kg.

3/4-WAY/2-POSITION MANUAL VALVE

Application – Single- or double-acting cylinders.
Actuation – Lever operated, detent positioned.
Functions – Pos. 1 – Oil is directed to "advance" side of cylinder, oil from "retract" side goes to reservoir; cylinder "holds" with pump shut off. Pos. 2 – Oil goes to "retract" side of cylinder; cylinder "holds" with pump shut off. When using as a 3-way valve for single-acting cylinders, port "A" or "B" is plugged. See note on page 52 regarding plugging of ports and resulting heat build-up.
Used on these pumps – P460, PA6D, PA17, PA46, PA55, PA60, PE17, PE21, PE30, PE46, PE55, PE84, PE90, PE120, PE200, PE400, PQ60 and PQ120 series.
No. 9504 – 3/4-way/2-position manual valve. Wt., 1,9 kg.
NOTE: 9504 can be remote mounted with a 9510 subplate (see page 107).











NOTE: A pressure switch and/or gauge may be attached to any valve on this page. (refer to pages 117, 124-125)
⚠**CAUTION:** To prevent sudden, uncontrolled descent of a load as it is being lowered, use a No. 9596 Load Lowering Valve or No. 9720 Counter Balance Valve (see page 132) in conjunction with the directional valve used in your application.
IMPORTANT: Conversion kit 251528 must be used when mounting any of the valves on this page on PA17 or PE17 pumps.
IMPORTANT: When ordering any valve for a PE30 or PG30 series pump, 1/2" longer mounting screws are required. For valves 9504, 9584, 9610 and 9610A, order four 12001 cap screws. For valve 9582, order two 12001 and two 10856 cap screws.

3 Way/3 Position Manual

700 bar, 3/8" ports, 19 l/min max flow rate.



3-WAY/3-POSITION (CLOSED CENTER) NON-INTERFLOW MANUAL VALVE WITH "POSI-CHECK®"

Application – Single-acting cylinders.
Actuation – Lever operated, detent positioned.
Functions – Pos. 1 – Oil is directed from pump to cylinder and "holds" with pump shut off; line to reservoir is blocked. Pos. 2 – All oil is open to reservoir through tank line.
Center pos. – Cylinder pressure is held; pump should be shut off.
Used on these pumps – P460, PA17, PA46, PA55, PA60, PE17, PE21, PE30, PE46, PE55, PE84, PE90, PE120, PE200, PE400, PQ60 and PQ120 series.
NOTE: A pressure switch and/or gauge may be attached if desired (see pages 124-125, 117). Also, the 9502 can be remote mounted if a 9510 subplate is used (see page 117).
No. 9502 – 3-way/3-position (closed center) manual valve. Wt., 1,9 kg.

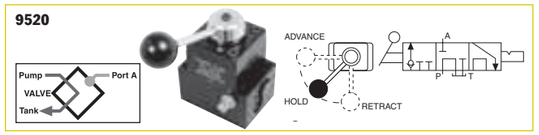

3-WAY/3-POSITION (TANDEM CENTER) MANUAL VALVE WITH "POSI-CHECK®"

Application – Single-acting cylinders.
Actuation – Lever operated, detent positioned.
Functions – "Advance" "hold" and "return". When shifted to "return" position, pump and cylinder return oil through their own separate return lines, allowing faster retraction of piston. The "Posi-Check®" feature guards against pressure loss when shifting from "advance" to "hold" position.
Used on these pumps – P460, PA17, PA46, PA55, PE17, PE21, PE30, PE46, PE55, PE84, PE90, PE120, PQ60, PQ120, PE200, PE400, PG30, PG55, PG120 and PG400 series.
No. 9520 – 3-way/3-position (tandem center) manual valve. Wt., 2,3 kg.

3-WAY/3-POSITION (TANDEM CENTER) METERING VALVE

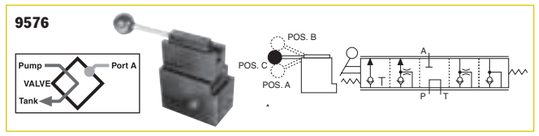

Application – Single-acting cylinders.
Actuation – Lever operated.
Functions – Cylinder piston metered "advance", "hold" and metered "return".
Used on these pumps – PA17, PA46, PA55, PE17, PE21, PE30, PE46, PE55, PE84, PE90, PE120, PQ60, PQ120, PE200, PE400, PG30, PG55, PG120 and PG400 series.
NOTE: A pressure switch and/or gauge may be attached if desired see pages 124-125, 117). Also, the 9576 can be remote mounted with a 9510 subplate (see page 117).
No. 9576 – 3-way/3-position (tandem center) metering valve. Wt., 3,9 kg.

⚠ CAUTION: To prevent sudden, uncontrolled descent of a load as it is being lowered, use a No. 9596 Load Lowering Valve or No. 9720 Counter Balance Valve (see page 132) in conjunction with the directional valve used in your application.
NOTE: Valves 9501, 9502, 9504 and 9507 can have a port blocked or have a closed center position. When a port is blocked and the valve is shifted to the blocked port, the pump will generate excessive heat. An electric or rotary air pump can either be turned off manually or with a pressure switch. Reciprocating air pumps may be adjusted to stall out and stop.
NOTE: Gauge ports monitor pump pressure only, not pressure to the hydraulic cylinder(s).
IMPORTANT: Conversion kit 251528 must be used when mounting any of the valves on this page on PA17 or PE17 pumps.
IMPORTANT: When ordering any valve for a PE30 or PG30 series pump, 1/2" longer mounting screws are required. For valves 9502 and 9520, order four 12001 cap screws. For valve 9576, order four 17428 cap screws.

4 Way/3 Position Manual

700 bar, 3/8" ports, 19 l/min max flow rate.

4-WAY/3-POSITION (TANDEM CENTER) VALVE WITH "POSI-CHECK®"

Application – Double-acting cylinders.
Actuation – Lever operated, detent positioned.
Functions – "Advance", "hold" and "return". The "Posi-Check®" feature guards against pressure loss when shifting from "advance" to "hold" position.
Used on these pumps – P460, PA6D, PA17, PA46, PA55, PE17, PE21, PE30, PE46, PE55, PE84, PE90, PE120, PE200, PE400, PED, PG30, PG55, PG120, PG400, PQ60 and PQ120 series
No. 9506 – 4-way/3-position (tandem center) manual valve. Wt., 2,3 kg.

4-WAY/3-POSITION (TANDEM CENTER) AND (OPEN-CENTER) MANUAL VALVES

Application – Single- or double-acting cylinders.
Actuation – Lever operated, detent positioned.
Functions – The 9500 provides "advance", "hold" and "return". The 9511 (open center) valve can be used if holding is not a requirement, as when running two separate hydraulic tools. Provides "advance" and "return" only.
Used on these pumps – P460, PA17, PA46, PA55, PE17*, PE21, PE30, PE46, PE55, PE84, PE90, PE120, PE200, PE400, PG30, PG55, PG120, PG400, PQ60 and PQ120 series. *Does not mount without 251528
No. 9500 – 4-way/3-position (tandem center) manual valve. Wt., 1,9 kg.
No. 9511 – Same as 9500, except has an open center.

4-WAY/3-POSITION (CLOSED CENTER) MANUAL VALVE WITH "POSI-CHECK®"

Application – Single- or double-acting cylinders.
Actuation – Lever operated, detent positioned.
Functions – Similar to 9506, but is a closed center valve with "Posi-Check®". Generally used to operate multiple cylinders with a single pump. Provides "advance", "hold" and "return". The "Posi-Check®" feature guards against pressure loss when shifting from the "advance" to "hold" position. See note on page 46 regarding plugging of ports and resulting heat build-up.
Used on these pumps – P460, PA17, PA46, PA55, PA60, PA6D, PE17, PE21, PE30, PE46, PE55, PE84, PE90, PE120, PE200, PE400, PQ60 and PQ120 series.
No. 9507 – 4-way/3-position (closed center) manual valve. Wt., 2,3 kg.

4-WAY/3-POSITION (CLOSED CENTER) MANUAL VALVE

Application – Single- or double-acting cylinders.
Actuation – Lever operated, detent positioned.
Functions – "Advance", "hold" and "return". Closed center design makes valve suitable for operating multiple cylinders from a single pump. See note on page 52 regarding plugging of ports and resulting heat build-up.
Used on these pumps – P460, PA17, PA46, PA55, PA60, PE17, PE21, PE30, PE46, PE55, PE84, PE90, PE120, PE200, PE400, PQ60 and P120 series.
No. 9501 – 4-way/3-position (closed center) valve. Wt., 1,9 kg.

NOTE: A pressure switch and/or gauge may be attached to valves 9500, 9501, 9506, 9511 if desired (see pages 124-125, 117). Also, all valves on this page may be remote mounted with a 9510 subplate (see page 117).











CYLINDER/PUMP MATCHING Page 6
CYLINDERS Page 14
PUMP/CYLINDER SETS Page 61
PUMP ACCESSORIES Page 116
HYDRAULIC ACCESSORIES Page 120

Valves
HYDRAULIC PUMP MOUNTED

Manual and
Pilot Operated

700 bar, 3/8" ports, 19 l/min
max flow rate.

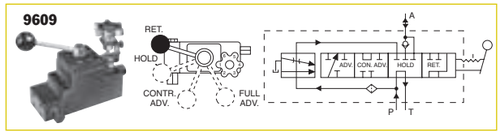

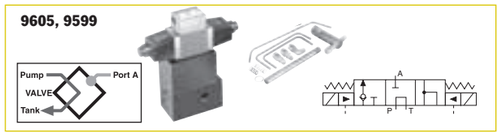

3-WAY/3-POSITION (TANDEM CENTER) SOLENOID VALVES WITH "POSI-CHECK®"

Application – Single-acting cylinders.
Actuation – Solenoid operated: 9605 is 115 volt, 50/60 Hz; 9599 is 24 volt, 50 Hz.
Functions – "Advance", "hold" and "return" positions. When in "advance", solenoid "B" is energized and oil goes from pump to cylinder through pressure port. In "return" position, solenoid "A" is energized and oil is directed from cylinder and pump to reservoir. With both solenoids de-energized, in "hold" position, oil from pump is directed back to reservoir while oil is checked in cylinder. The "Posi-Check®" feature holds load when shifting from "advance" to "hold" position.
Used on these pumps – Furnished with pilot lines and adapters for PE55, PE30 (carrying handles must be removed) and PE120 series. For application on other models, consult factory.
No. 9605 – 3-way/3-position (tandem center) solenoid valve, 115 volt, 50 Hz. Wt., 6,4 kg.
No. 9599 – Same as 9605 except for 24 volt, 50 Hz circuits.
NOTE: Valves above are shipped without controls. Use 202777 remote hand control (see page 116). Consult factory for field installation.

3-WAY/4-POSITION MANUAL PRESSURE COMPENSATED VALVE

Application – Single-acting cylinders. Primarily for use in testing soil, rock, concrete, asphalt and related engineering materials.
Actuation – Lever and adjustable, pressure compensated flow control valve.
Functions – Cylinder piston "return", "hold", "controlled advance" (pressure compensated) and "advance" (full flow). Will deliver a relatively constant flow regardless of pressure between 70 and 700 bar.
Used on these pumps – PA17, PA46, PA55, PE17, PE21, PE30*, PE46, PE55, PE90, PE200, PE400, PG30*, PG55, PG120, PG400, PQ60 and PQ120 series.
*** NOTE:** Adapter kit 252161 is required for mounting this valve to a PE30 or PG30 series pump.
NOTE: This valve can be remote mounted with a 9510 subplate (see page 117).
No. 9609 – 3-way/4-position manual pressure compensated valve. Wt., 4 kg.

⚠ **CAUTION:** To prevent sudden, uncontrolled descent of a load as it is being lowered, use a No. 9596 Load Lowering Valve or No. 9720 Counter Balance Valve (see page 132) in conjunction with the directional valve used in your application.
IMPORTANT: Conversion kit 251528 must be used when mounting the 9609 valve on PA17 or PE17 pumps.
IMPORTANT: When ordering any valve for a PE30 or PG30 series pump, 1/2" longer mounting screws are required. For valves 9500, 9501 and 9511, order four 12001 cap screws. For valve 9552, 9506, and 9507, order four 11956 cap screws. For valves 9599 and 9605, order four 251078 cap screws. For valve 9609, order four 10855 cap screws.

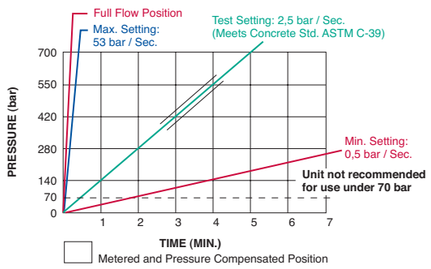

FLOW

Full flow position - 19 l (Ref.)
Metered advance position
1 l/min. (Max.)

PRESSURE

Min. working pressure - 70 bar.
Max. working pressure- -700 bar.
Max. valve case pressure - 35 bar.

Valves
HYDRAULIC PUMP MOUNTED

Solenoid or
Air Operated

700 bar, 3/8" ports, 19 l/min
max flow rate.

3-WAY/2-POSITION SOLENOID VALVE

Application – Single-acting cylinders.
Actuation – Solenoid operated, 115 volt, 50 Hz.
Functions – Cylinder piston advances when solenoid is de-energized and pump is running. When solenoid is energized, oil is directed to reservoir, and piston returns. For "hold" position, pump is stopped with solenoid de-energized.
Used on these pumps – PE17, PE21, PE30, PE46, PE55, PE84, PE90, PE120, PE200, PE400, PQ60 and PQ120 series.
No. 9579 – 3-way/2-position solenoid valve, 115 volt, 50 Hz. Wt., 4,4 kg.
No. 9569 – Same as 9579, except with 24 volt, 50 Hz solenoid.
No. 9570 – Same as 9579 except with 230 volt, 50 Hz solenoid.
NOTES: Valves above are shipped without control switch. Use 202777 remote hand switch (see page 116). When this valve is mounted, the pump must be equipped with an outlet check valve.

3/4-WAY/2-POSITION SOLENOID VALVES

Application – Single- or double-acting cylinders. When used with single-acting cylinders, one port should be plugged.
Actuation – Solenoid operated.
Functions – Oil is directed to "extend" side of cylinder, oil from "retract" side goes to reservoir; cylinder "holds" with pump shut off. Oil is directed to "retract" side of cylinder; oil from "extend" side goes to reservoir.
NOTE: Cylinder will not "hold" in the "return" position with motor running or shut off.
Used on these pumps – 9552, 9572 and 9592 are used with PE17, PE30 (with carrying handles removed), PE46, PE55, PE84, PE90, PE200, PE400, PQ60 and PQ120 series.
No. 9592 – 3/4-way/2-position solenoid valve, 115 volt, 50 Hz. Wt., 6,6 kg.
No. 9552 – Same as 9592, except with 230 volt, 50 Hz solenoid.
No. 9572 – Same as 9592, except with 24 volt, 50 Hz solenoid.
NOTE: Valves above are shipped without controls. The 9552, 9572 and 9592 can be used with the 304718 remote hand control. (see page 116)

Note: Ports are 1/4" NPTF.

AIR ACTUATED VALVE

Application – Single- or double-acting cylinders. When used with single-acting cylinders, one port should be plugged.
Actuation – Air operated.
Functions – Oil is directed to "extend" side of cylinder, oil from "retract" side goes to reservoir; cylinder "holds" with pump shut off. Oil is directed to "retract" side of cylinder; oil from "extend" side goes to reservoir.
NOTE: Cylinder will not "hold" in the "return" position with motor running or shut off.
Used on these pumps – PA17, PA46 and PA55 series.
No. 9594 – 3/4-way/2-position solenoid valve, air operated (minimum of 4 bar air pressure required). Wt., 5 kg.
NOTES: Valve above is shipped without controls. 9594 can be used with the 209593 remote hand control (see page 116). See page 132 for remote mounted models of this valve.







⚠ **CAUTION:** To prevent sudden, uncontrolled descent of a load as it is being lowered, use a No. 9596 Load Lowering Valve or No. 9720 Counter Balance Valve (see page 132) in conjunction with the directional valve used in your application.
IMPORTANT: Conversion kit 251528 must be used when mounting any of the valves on this page on PA17 or PE17 pumps.
IMPORTANT: When ordering any valve for a PE30 or PG30 series pump, 1/2" longer mounting screws are required. For valves 9569, 9570 and 9579, order four 10856 cap screws. For valves 9552, 9572 and 9592, order four 12001 cap screws.

CYLINDER/PUMP MATCHING Page 6
CYLINDERS Page 14
PUMP/CYLINDER SETS Page 61
PUMP ACCESSORIES Page 116
HYDRAULIC ACCESSORIES Page 120

Valves
HYDRAULIC PUMP MOUNTED

Solenoid or Air Operated

700 bar, 3/8" ports, 19 l/min max flow rate.

PUMPS/VALVES

9590, 9522, 9615

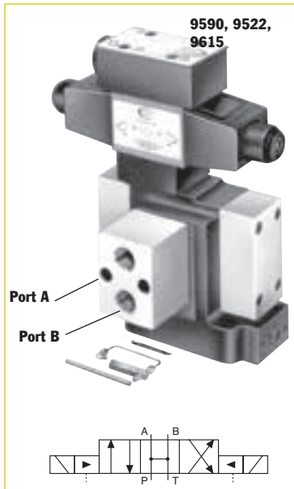

4-WAY/3-POSITION (OPEN CENTER) SOLENOID VALVE

Application – Double-acting cylinders.
Actuation – Solenoid operated, 115 volt, 50 Hz.
Functions – "Advance", open center and "return" positions. Cylinder ports and pump port are open to reservoir in "neutral".
Used on these pumps – Furnished with pilot lines and adapters for PE30 (with carrying handles removed), PE55, PE90 and PE120 series. For other pump models, consult factory.
NOTE: A pressure switch and/or gauge may be attached if desired (see pages 117, 124-125).
No. 9590 – 4-way/3-position (open center) solenoid valve, 115 volt, 50 Hz. Wt., 7 kg.
No. 9522 – Same as 9590 except for 230 volt, 50 Hz.
No. 9615 – Same as 9590 except for 24 volt, 50 Hz.

9513, 9512, 9516, 9519

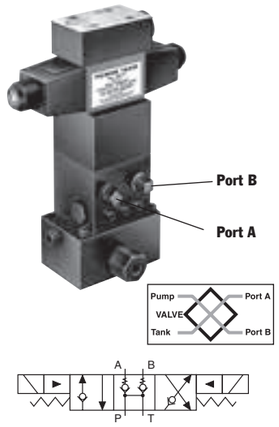

4-WAY/3-POSITION (TANDEM CENTER) PILOT OPERATED SOLENOID VALVE

Application – Double-acting cylinders.
Actuation – Solenoid operated, 115 volt, 50 Hz.
Functions – "Advance", "hold" and "return". The "Posi-Check®" feature holds the load when shifting from the "advance" to the "hold" position.
Used on these pumps – PE17, PE21, PE30 (with carrying handles removed), PE46, PE55, PE84, PE90, PE120, PE200, PE400, PQ60 and PQ120 series.
NOTE: A gauge may be attached if desired (see pages 124-125).
No. 9513 – 4-way/3-position (tandem center) solenoid valve, 115 volt, 50Hz. Wt., 8,2 kg.
No. 9512 – Same as 9513 except for 24 volt, 50 Hz circuits.
No. 9516 – Same as 9513 except for 12 volt DC. For use on the PG1204S and PG400 series pumps only.
No. 9519 – Same as 9513 except for 230 volt, 50 Hz circuits. Consult factory for field installation.

9589, 9523, 9553

3-WAY/2-POSITION (PILOT OPERATED) SOLENOID VALVE

Application: Single-acting cylinders.
Actuation: Solenoid operated, 115 volt, 50 Hz.
Function: "Advance" and "return".
Used on these pumps: Furnished with pilot lines and adapters for PE30 (with carrying handles removed), PE55, PE90 and PE120 series. For other pump models, consult factory. **NOTE:** A pressure switch and/or gauge may be attached if desired (see pages 117, 124-125).
No. 9589 – 3-way/2-position (pilot operated) solenoid valve, 115 volt, 50Hz. Wt., 3,7 kg.
No. 9523 – Same as 9589 except for 230 volt, 50 Hz.
No. 9553 – Same as 9589 except for 24 volt, 50 Hz.

NOTE: Valves above are shipped without control switch. Use 202777 remote hand switch (see page 116).
⚠ **CAUTION:** To prevent sudden, uncontrolled descent of a load as it is being lowered, use a No. 9596 Load Lowering Valve or No. 9720 Counter Balance Valve (see page 132) in conjunction with the directional valve used in your application.
IMPORTANT: Conversion kit 251528 must be used when mounting the 9609 valve on PA17 or PE17 pumps.
IMPORTANT: When ordering any valve for a PE30 or PG30 series pump, 1/2" longer mounting screws are required. For valves 9513 and 9519, order four 11956 cap screws. For valves 9523, 9553 and 9589, order four 10855 cap screws. For valves 9522, 9590 and 9615, order four 10854 cap screws.

Valves
HYDRAULIC PUMP MOUNTED

Manual

700 bar, 3/8" ports, 19 l/min max flow rate.

PUMPS/VALVES

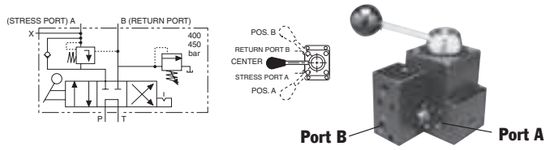

9628

Designed for use with Power Team air, gasoline and electric powered hydraulic pumps.

4-WAY/3-POSITION (TANDEM CENTER) MANUAL VALVE

Application – Single strand, double-acting stressing jacks with Power Wedge seater.
Actuation – Lever operated, detent positioned.
Operation –
1. With valve in center position, pump is started.
2. Cable is inserted into stressing tool, valve is placed in "A" position. "Pull" portion of stressing tool is pressurized to specified level for proper cable tensioning ("A" port is checked internally, can only be released by building pressure in "B" position).
3. Valve is placed in "B" position, which is pressure controlled and will not exceed 440 bar. "Return" portion of stressing tool is pressurized and will release "A" port when pressure reaches approximately one-half the "A" port pressure. "A" port remains open as long as this pressure differential is maintained.
4. Pump is stopped, valve is placed in "A" position, releasing "B" port pressure.

Used on these pumps: PA17*, PA46*, PA55, PE17*, PE21*, PE30, PE46*, PE55, PE60, PE84, PE120, PE200, PE400, PG30*, PG55, PG120, PG400, PQ60 and PQ120 series.

* These pumps may have reduced first flow stage characteristics due to internal valve restrictions.

No. 9628 – Post tensioning valve for 700 bar (max.) single-acting/Power Wedge seater. Wt., 2,5 kg.

"TWIN" 4-WAY/3-POSITION (TANDEM CENTER) MANUAL VALVE

Application – Multi-strand, double-acting stressing jacks with an auxiliary seating cylinder.
Actuation – Dual lever operated, detent positioned.
Operation –
1. With valves "A" and "B" in center position, pump is started; cable is inserted into stressing tool.
2. Valve "A" is placed in "Stress" position; cylinder extends to tension cable. Pump pressure controls force exerted by tensioning cylinder in this position. "Stress" port is checked internally, and can only be released by building pressure in the valve "B" return position.
3. When desired cable tension is achieved, valve "A" is placed in valve "B" position and valve "B" in "Seat" position. Seating portion of cylinder will be pressurized to seating pressure controlled by "Seat" relief valve (factory set to 275 bar).
4. Valve "B" is shifted to "Return" position, which is pressure controlled and will not exceed 155 bar. "Return" portion of stressing tool should be pressurized and will release "Stress" port when pressure reaches 15% of "Stress" port pressure.
5. "Stress" port will remain open and cylinder will return as long as pressure differential is maintained. "Stress" and "Seat" ports are open to reservoir.
6. When cylinder has fully returned, both valves are shifted to "Center" position and oil will be directed to reservoir. Maximum pressure setting for the "Seat" relief valve is 420 bar.

Used on these pumps: PA17*, PA46*, PA55, PE17*, PE21*, PE30, PE46*, PE55, PE84, PE120, PE200, PE400, PG30*, PG55, PG120, PG400, PQ60 and PQ120 series.*

* These pumps may have reduced first flow stage characteristics due to internal valve restrictions.

No. 9632 – Post tensioning valve for 700 bar (max.) double-acting systems. Wt., 6,2 kg.



Pump mounted, 6-position detented 5-way manual dual valve. Rated pressure to valve "A" is 700 bar and valve "B" is 420 bar. Case pressure is 35 bar max.

⚠ **CAUTION:** To prevent sudden, uncontrolled descent of a load as it is being lowered, use a No. 9596 Load Lowering Valve or No. 9720 Counter Balance Valve (see page 132) in conjunction with the directional valve used in your application.
IMPORTANT: Conversion kit 251528 must be used when mounting any of the valves on this page on PA17 or PE17 pumps.
IMPORTANT: When ordering any valve for a PE30 or PG30 series pump, 1/2" longer mounting screws are required. For valves 9569, 9570 and 9579, order four 10856 cap screws. For valves 9552, 9572 and 9592, order four 12001 cap screws.

CYLINDER/PUMP MATCHING Page 6 | CYLINDERS Page 14 | PUMP/CYLINDER SETS Page 61 | PUMP ACCESSORIES Page 116 | HYDRAULIC ACCESSORIES Page 120

Hand Pump
HYDRAULIC P SERIES

197 to 738 cm³ reservoir
Single-Speed
Single-Acting

Best suited for applications where there is little or no free travel.

PUMPS

- All metal construction, won't burn through in welding environments.
- Formed metal handle provides less flex, and reduces operator fatigue.
- Convenient fill port on P23 and P55 allows pumps to be filled in a horizontal or vertical position.
- Fill cap seal acts as safety valve preventing over-pressurizing of reservoir.
- Relief valve inboard of check valve prevents loads from drifting down.
- Large valve knob gives added control for slowly metering loads down.

P12

P23

700 bar
P55



Pump No.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	J (deg.)	K (mm)	L (mm)	M (in)	N (mm)
P12	101,6	–	–	101,6	342,9	85,7	55,6	–	45°	4,8	85,7	3/8-NPTF	28,6
* **P23**	158,8	330,2	88,9	141,3	346,1	108,0	82,6	261,6	38°	7,9	120,7	3/8-NPTF	41,3
* The P23 pump maximum pressure is 210 bar only.													
P55	165,1	533,4	88,9	141,3	584,2	108,0	82,6	501,7	38°	7,9	120,7	3/8-NPTF	41,3

Power Team hand pumps, with the angled fill port, have a built in "relief valve" protection system. This system is designed to protect over-pressurization of the reservoir from sudden back pressure. This system also works as a seal to prevent oil leaks.

For Use With	Order No.	Volume & Pressure: Volume per Stroke (cm³) Speed	LP	HP	Maximum Pressure (bar) LP	HP	Handle Effort (kg)	Reservoir: Oil Capacity (cm³)	Usable Oil Capacity (cm³)	Oil Port (in)	Product Weight (kg))
Single	**P12**	1	–	1,1	–	700	34	197	148	3/8-NPTF	2,6
Acting	**P23**	1	–	2,6	–	210	32	390	333	3/8-NPTF	5,5
Cylinders*	**P55**	1	–	2,6	–	700	66	902	738	3/8-NPTF	7,2

LP = Low Pressure
HP = High Pressure

* Pump includes 2-Way Valve

Hand Pump
HYDRAULIC P SERIES

400 to 1131 cm³ reservoir
Two-Speed
Single-Acting

Pump automatically shifts into the high pressure lift stage upon contact with the load.

PUMPS

700 bar

P59L

- All metal construction won't burn through in welding environments.
- Two-speed reduces handle strokes so you work faster and easier.
- Formed metal handle provides less flex, and reduces operator fatigue.
- Convenient fill port allows pumps to be filled in a horizontal or vertical position.
- Relief valve inboard of check valve prevents loads from drifting down.
- Large valve knob gives added control for slowly metering loads down.

P19L/P59L

- More usable oil volume — use with larger or longer stroke cylinders.
- True unloading valve set for 850 PSI (59 Bar) provides more efficiency and lower handle force.
- Link design reduces handle effort by 40%.
- Durable aluminum reservoir, manifold, and end cap.
- Ergonomic non-slip handle grip provides more comfort.
- Spring loaded handle lock incorporated into handle.

P19

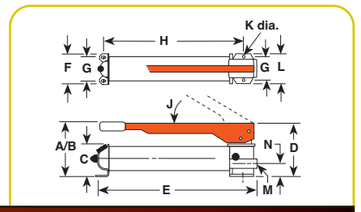

Pump No..	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	J (deg.)	K (mm)	L (mm)	M (in)	N (mm)
P19	139,7	371,5	73,0	115,9	347,7	101,6	82,6	281,0	53°	7,9	101,6	3/8-NPTF	35,7
P19L	141,5	----	------	-------	347,7	104,1	82,6	281,0	40°	7,9	104,1	3/8-NPTF	------
P59	177,8	533,4	88,9	127,0	584,2	108,0	82,6	501,7	38°	7,9	120,7	3/8-NPTF	41,3
P59L	177,8	-----	------	-------	533,4	120,7	82,6	501,7	50°	7,9	120,7	3/8-NPTF	------
P59F	88,9	425,5	88,9	152,4	590,6	108,0	82,6	514,4	–	7,9	114,3	3/8-NPTF	42,9

For Use With	Order No.	Volume & Pressure: Volume per Stroke (cm³) Speed	LP	HP	Maximum Pressure (bar) LP	HP	Handle Effort (kg)	Reservoir: Oil Capacity (cm³)	Usable Oil Capacity (cm³)	Oil Port (in)	Product Weight (kg)
Single	**P19**	2	5,0	1,2	22	700	45	400	328	3/8-NPTF	3,0
Acting	**P19L**	2	4,1	0,9	59	700	37	475	443	3/8-NPTF	2,3
Cylinders*	**P59**	2	10,9	2,6	22	700	66	902	738	3/8-NPTF	7,8
	P59L	2	12	2,6	59	700	44	1131	1082	3/8-NPTF	4,1
	P59F	2	9,0	2,1	22	700	55	902	738	3/8-NPTF	6,4

LP = Low Pressure
HP = High Pressure

*Pump includes 2-Way Valve

CYLINDER/PUMP MATCHING Page 6
CYLINDERS Page 12
PUMP/CYLINDER SETS Page 61
PUMP ACCESSORIES Page 116
HYDRAULIC ACCESSORIES Page 120

Hand Pump
HYDRAULIC P SERIES

9,5 liter reservoir
Two-Speed Single- and Double-Acting

Best suited for applications where there is little or no free travel.

PUMPS

P157/P159

- Rugged all metal construction for strength and durability that won't burn through in welding environments.
- Heavy-duty, formed metal handle provides less flex, and less operator fatigue than round or composite handles.
- Convenient fill port on P23 and P55 allows pumps to be filled in a horizontal or vertical position.
- Fill cap seal acts as safety valve to prevent over-pressurizing of reservoir.
- Relief valve inboard of check valve prevents loads from drifting down.
- Large valve knob gives added control for slowly metering loads down.

P300 hand pump and 10 ton cylinders used for a vehicle lift.

P300

P460





Pump No.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	J (deg.)	K (mm)	L (mm)	M (in)	N (mm)	P
P157/ P159	197	521	123,8	175	578	98,4	76,2	502	39°	7,9	95,3	3/8-NPTF	57,2	—
P300	210	533	114,3	175	575	215,9	190,5	526	39°	7,9	95,3	3/8-NPTF	57,2	—
P460	283	787	171,5	289	610	743	279,4	229	80°	241,3	—	3/8-NPTF	—	1/4 NPTF

FK59
FK159B

Foot pump conversion kit
No. FK59 - Foot pump conversion kit for use on P55/P59 pumps. Wt., 2,7 kg.
No. FK159B – Foot pump conversion kit for use on P157/P159 and P300/P300D pumps. Wt., 2,7 kg.

For Use With	Order No.	Volume & Pressure: Volume per Stroke (cm³) Speed	LP	HP	Maximum Pressure (bar) LP	HP	Handle Effort (kg)	Reservoir Oil Capacity (cm³)	Usable Oil Capacity (cm³)	Oil Port (in)	Product Weight (kg)
Single-	**P157**	2	10,7	2,6	97	700	64	2491	2245	3/8-NPTF	11,8
Acting	**P159**	2	42,6	2,6	22	700	64	2491	2245	3/8-NPTF	11,8
Cylinders*	**P300**	2	42,6	2,6	22	700	64	5.700	5081	3/8-NPTF	25,1
	P460	2	120,5	4,6	22	700	41	9.500	7539	3/8-NPTF	24,9
Double-	**P157D**	2	10,7	2,6	97	700	64	2491	2245	3/8-NPTF	13,1
Acting	**P159D**	2	42,6	2,6	22	700	64	2491	2245	3/8-NPTF	12,7
Cylinders**	**P300D**	2	42,6	2,6	22	700	64	5.700	5081	3/8-NPTF	25,9
	P460D	2	120,5	4,6	22	700	41	9.500	7539	3/8-NPTF	26,3

LP = Low Pressure
HP = High Pressure

* Pump includes 2-Way Valve
** Pump includes 4-Way Valve

Power Team®

Cylinder/Pump
HYDRAULIC RPS SERIES

Cylinder and pump combinations

Precision-matched cylinder and pump combinations for wide range of applications.

PUMPS

RPS1006

- Four styles of cylinders to choose from.
- Sets feature single- or two-speed hydraulic hand pumps.
- Cylinders of various tonnages with long, medium or short stroke.
- Includes necessary fittings, couplers and 1,8m hose.
- Gauge and gauge mounting adapter is recommended. (See pages 124-125)

RPS55

700 bar
ASMEB30-1

RPS203H

Note: Actual product may differ from photo.

Optional Storage Box Storage box for hydraulic cylinder and pump sets. Rugged industrial strength material, strong as steel, never needs painting, won't rust, dent or chip. Weatherproof lid is self sealing and lockable. Molded-in handles, water-tight, one piece bottom and side construction. Strong enough to stand on.
No. 350722 – 890mmL x 356mmH x 343mmW, storage box.

Style Of Cyl.	Cyl. Cap. (Tons)	Stroke (mm)	Order No.	Retracted Height (mm)	Handle Strokes Required to Fully Extended Cylinder	Cyl.-No.	Pump No.	Hose No.	Coupler No.	Pump Speed	Prod. Wt. (kg)
	5	133,4	**RPS55**	216	75	C55C	P12	9756	9798	Single	5,4
	10	54,0	**RPS102****	121	32	C102C	P55	9756	9798	Single	11,8
	10	155,6	**RPS106****	248	93	C106C	P55	9756	9798	Single	14,5
	10	257,2	**RPS1010****	349	154	C1010C	P55	9756	9798	Single	16,1
"C"-	15	104,8	**RPS154****	200	81	C154C	P55	9756	9798	Single	13,1
Series	15	155,6	**RPS156****	271	118	C156C	P55	9756	9798	Single	15,4
	25	158,8	**RPS256****	273	219	C256C	P55	9756	9798	Single	19,3
	25	362,0	**RPS2514****	476	285*	C2514C	P159	9756	9798	Two	28,4
	55	158,8	**RPS556****	283	268*	C556C	P159	9756	9798	Two	37,5
	100	168,3	**RPS1006**	337	428*	C1006C	P460	9756	9798	Two	58,3
"Shorty"	30	61,9	**RPS302****	117	61*	RSS302	P59	9756	9798	Two	18,1
	50	60,3	**RPS552****	127	89*	RSS502	P59	9756	9798	Two	22,7
	100	57,2	**RPS1002****	140	172*	RSS1002	P59	9756	9798	Two	36,7
"Center-Hole"	20	76,2	**RPS203H****	154	80	RH203	P55	9756	9798	Single	18,3
Alum.	55	155,6	**RPS556A****	273	262*	RA556	P159	9756	9798	Two	21,3

* Base on 50% if the stroke being made at low-pressure and 50% of the strokes at high pressure.

** Add suffix "B" (example: RPS102B, RPS203HB, etc.) to order set with optional storage box shown above.

CYLINDER/PUMP MATCHING Page 6 | CYLINDERS Page 12 | PUMP/CYLINDER SETS Page 61 | PUMP ACCESSORIES Page 116 | HYDRAULIC ACCESSORIES Page 120

Air Pump
HYDRAULIC PA6 SERIES

90 cm3/ min
Single-Acting

Compact, lightweight and portable. Single-Speed pumps designed to drive single-acting cylinders.

PUMPS

- The power unit of choice for major manufacturers of auto body, frame straighteners and other equipment.
- Operate at 3-8 bar shop air pressure at the pump.
- dBA 85 at 700 bar.
  * input air port inside thread size 1/4"NPT
- Serviceable pump motor is not a "throw away", providing economical repair.
- Permanently vented reservoir cap.
- Internal relief valve protects circuit components, air inlet filter protects motor.

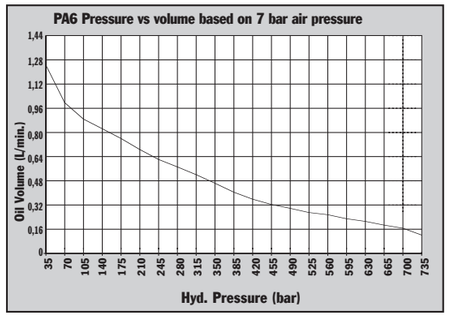



Pump No.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	G (mm)
PA6	197	149	111	241	127	102 x 229
PA6A	197	149	111	241	127	102 x 229
PA6AM	197	149	111	241	127	102 x 229
PA6M	197	149	111	241	127	102 x 229
PA6R	197	149	111	241	127	102 x 229
PA6RM	197	149	111	241	127	102 x 229
PA6M-1	200	152	111	321	187	–
PA6AM-2	254	197	171	292	241	203 x 254
PA6-2	260	203	178	292	241	130 x 181

PA6M-1

PA6-2

Typical Set-up
Hook-up for single-acting cylinders



Description	Order No.	Air Supply Req'd (bar)	Reservoir Cap. (l)	Reservoir Usable (l)	Oil Port (in)	Prod. Wt. (kg)
Base model pump with high density polyethylene reservoir.	PA6	3-8	1,7	1,6	3/8-NPTF	6,3
PA6 with externally adjustable relief valve.	PA6A	3-8	1,7	1,6	3/8-NPTF	6,8
PA6A with metal reservoir.	PA6AM	3-8	1,7	1,6	3/8-NPTF	7,7
PA6, except has metal reservoir.	PA6M	3-8	1,7	1,6	3/8-NPTF	8,2
PA6 with 3,7m remote control.	PA6R	3-8	1,7	1,6	3/8-NPTF	9,3
PA6R, except has metal reservoir.	PA6RM	3-8	1,7	1,6	3/8-NPTF	9,8
PA6, except has 3,8 l metal reservoir.	PA6M-1	3-8	3,8	3,0	3/8-NPTF	10,7
PA6, except has 7,6 l high density polyethylene reservoir.	PA6-2	3-8	7,6	7,3	3/8-NPTF	11,1
PA6, except has 9,5 l metal reservoir.	PA6M-2	3-8	9,5	9,1	3/8-NPTF	14,5

CYLINDER/PUMP MATCHING Page 6
CYLINDERS Page 12
PUMP/CYLINDER SETS Page 61
PUMP ACCESSORIES Page 116
HYDRAULIC ACCESSORIES Page 120

Air Pump

HYDRAULIC PA6D SERIES

98 cm³/min.
Double-Acting

Compact, lightweight and portable single-speed pump for driving double-acting cylinders.

- Operate at 3-8 bar shop air pressure at the pump.
- Internal relief valve protects circuit components, air inlet filter protects motor.
- Serviceable pump motor is not a “throw away”, providing economical repair.
- Permanently vented reservoir cap.
- dBA 85 at 700 bar for all PA6 pumps.
  * input air port inside thread size 1/4”NPT

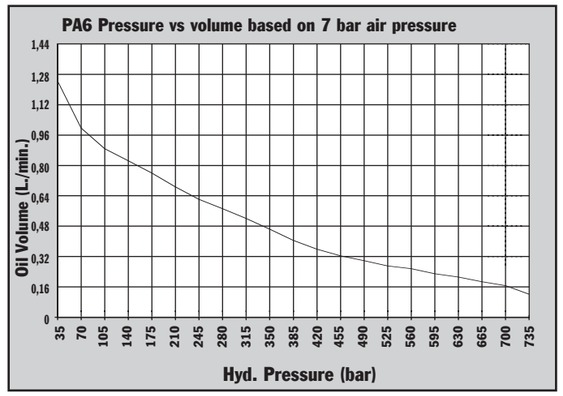

PA6D

700 bar



Pump No.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	G (mm)
PA6D	264	149	111	241	127	102 x 229
PA6DM	264	149	111	241	127	102 x 229
PA6DM-1	279	146	111	321	187	—
PA6D2	324	203	178	287	235	130 x 181
PA6DM-2	318	197	171	292	241	203 x 254

PA6DM-1

PA6D2

PA6D pump, DG100 digital pressure gauge and 25 ton cylinder used in a test fixture.



Description	Order No.	Valve No.	Air Supply Req'd (bar)	Reservoir Cap. (l)	Reservoir Usable (l)	Oil Port (in)	Prod. Wt (kg)
Base model pump with high density polyethylene reservoir.	**PA6D**	9504, 3-way/ 4-way	3 - 8	1,7	1,6	3/8-NPTF	8,3
PA6D, except has metal reservoir.	**PA6DM**	9504, 3-way/ 4-way	3 – 8	1,7	1,6	3/8-NPTF	9,2
PA6D, except has 3,8 l metal reservoir.	**PA6DM-1**	9504, 3-way/ 4-way	3 – 8	3,8	3,0	3/8-NPTF	12,7
PA6D, except has 7,6 l, high density polyethylene reservoir.	**PA6D2**	9504, 3-way/ 4-way	3 – 8	7,6	7,3	3/8-NPTF	13,0
PA6D, except has 9,5 l metal reservoir.	**PA6DM-2**	9504, 3-way/ 4-way	3 – 8	9,5	9,1	3/8-NPTF	16,4

CYLINDER/PUMP MATCHING Page 6
CYLINDERS Page 12
PUMP/CYLINDER SETS Page 61
PUMP ACCESSORIES Page 116
HYDRAULIC ACCESSORIES Page 120

PUMPS

Air Pump
HYDRAULIC PA9 SERIES

148 cm³/min.
Single-Acting

Ideal for powering single-acting cylinders and portable hydraulic tools.

PUMPS

- Easier to operate than a hand pump, giving you the speed you need at an affordable price.
- Easy and economical to service; not a "throw away" unit.
- Unique bladder design for all-position operation and storage.
- Operates on 3-8 bar shop air, at 570 l.
- Hard-coat anodized aluminum housing.
- Oil filler with integral safety relief minimizes chance of damage to reservoir bladder if overfilling occurs.

* input air port inside thread size 1/4"NPT

PA9 Foot Control

PA9
Foot Control

PA9H
Hand Control

700 bar

PA9H Hand Control Pump as used in a straightening press.

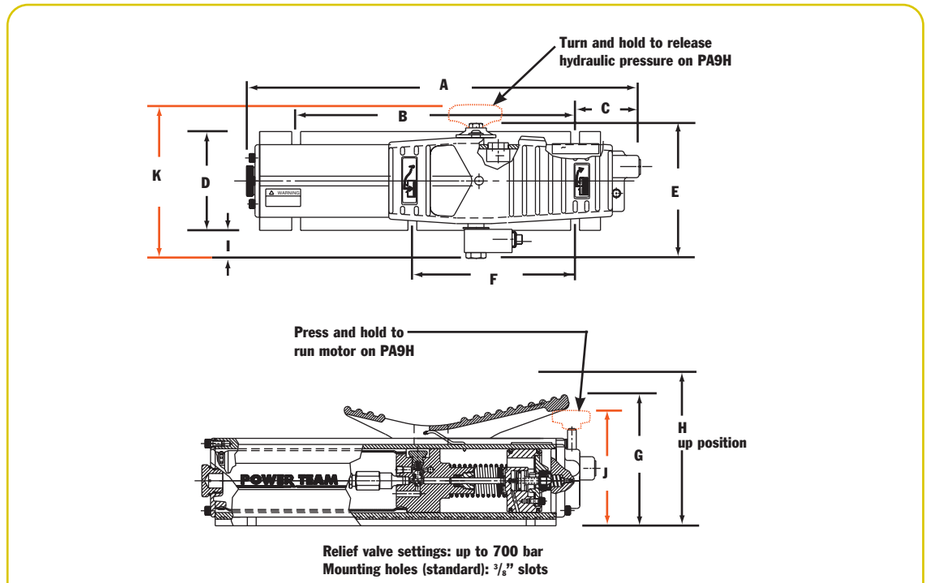

Relief valve settings: up to 700 bar
Mounting holes (standard): 3/8" slots

Pump No.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	J (mm)	K (mm)
PA9	432	305	71,4	108	149	178	142	178	28,2	–	–
PA9H	432	305	71,4	108	–	178	–	178	28,2	122	170

Typical Set-up
Hook-up for single-acting cylinders



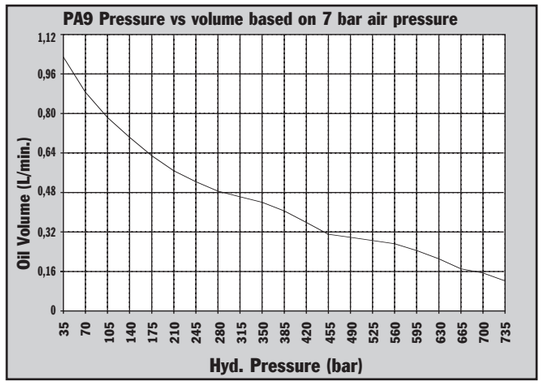

For Use with Cyl. Type	Order No.	Air Supply Req'd (bar)	Reservoir Cap. (cm³)	Reservoir Usable (cm³)	Oil Port (in)	Max. Pressure Output (bar)	Prod. Wt. (kg)
Single-Acting	**PA9**	3 – 8	574	549	3/8-NPTF	700	6,8
Single-Acting	**PA9H**	3 – 8	574	549	3/8-NPTF	700	6,8

CYLINDER/PUMP MATCHING Page 6
CYLINDERS Page 12
PUMP/CYLINDER SETS Page 61
PUMP ACCESSORIES Page 116
HYDRAULIC ACCESSORIES Page 120

Air Pump
HYDRAULIC PA60 SERIES

98 cm³/min.
Two-Speed

Two-speed pump for rapid oil delivery at low pressure quickly advances cylinder or tool.

PUMPS

- Equipped with air pressure regulator, air filter and lubricator.
- Serviceable air motor for economical repair.
- Internal relief valve protects circuit components.
- Permanently vented reservoir cap.

The PA60 used in a workholding environment.

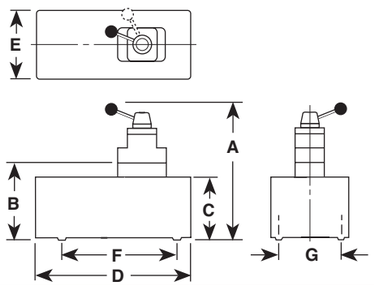

Pump No.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Max. Pressure Output bar	Oil Del. * (l/min) 0 bar	7 bar	70 bar	350 bar	700 bar
PA60	–	240	206	362	244	181	130	700	6,24	5,6	0,8	0,19	0,1
PA64	362	–	206	362	244	181	130	700	6,24	5,6	0,8	0,19	0,1

* Typical delivery. Actual flow will vary with field conditions.

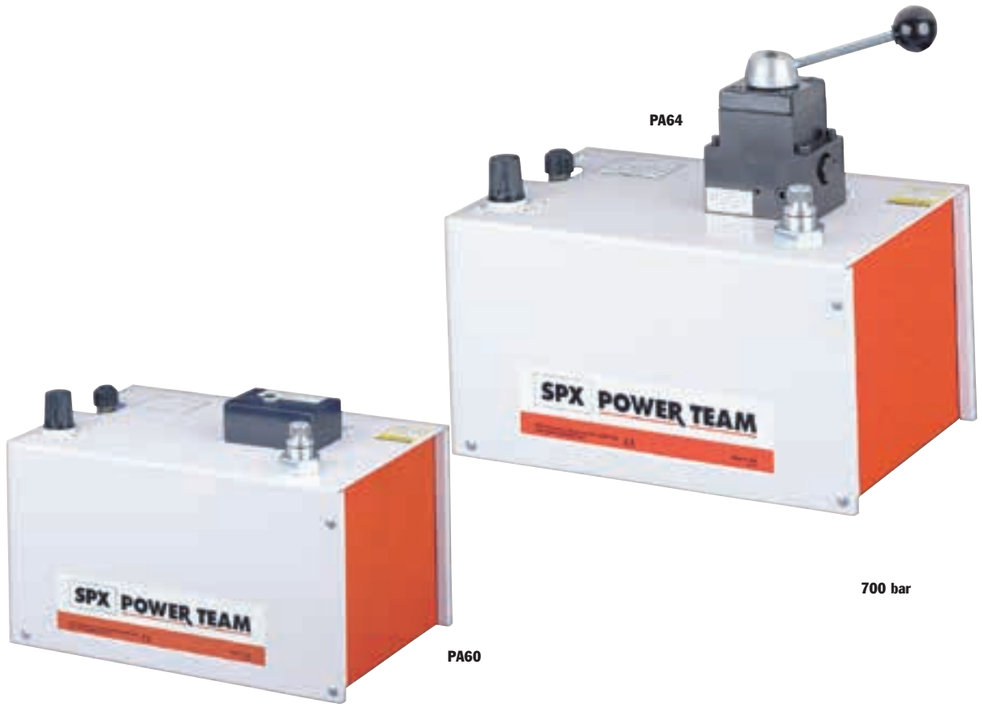

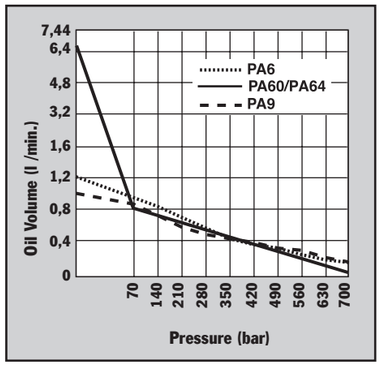

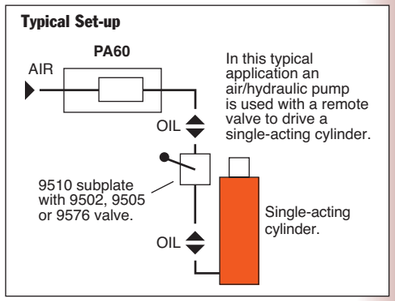

Description	Order No.	Valve No.	Valve Function	Air Supply Req'd bar	Reservoir Cap. (l)	Reservoir Usable (l))	Oil Port (in)	Prod. Wt (kg)
For use with remote valves.	**PA60**	Manifold	–	3 - 8	7,6	6,8	3/8-NPTF	24,5
For use with single- or double-acting cylinders.	**PA64**	9507, 3-way/ 4-way	Advance Hold Return	3 –8	7,6	6,8	3/8-NPTF	24,5

Notes: Air inlet port 1/4" NPTF. Requires 570 l at 7 bar shop air pressure at the pump.

CYLINDER/PUMP MATCHING Page 6
CYLINDERS Page 12
PUMP/CYLINDER SETS Page 61
PUMP ACCESSORIES Page 116
HYDRAULIC ACCESSORIES Page 120

Air Pump

HYDRAULIC PA50 SERIES

460 cm³/min.
Low Pressure

Single-speed, low pressure (220 bar) output pumps.

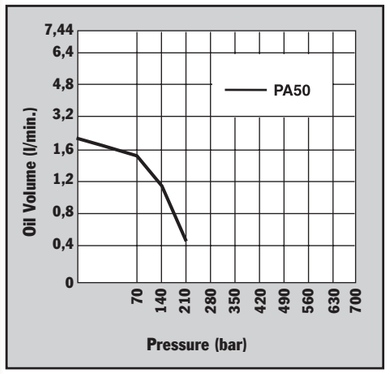

PA50M

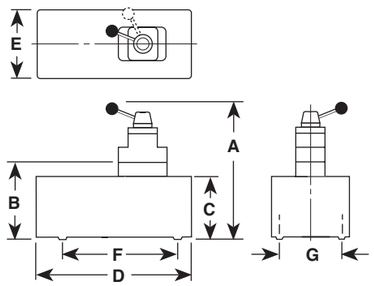

Pump No.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Max. Pressure Output bar	Oil Del. * (l/min) 0 bar	7 bar	70 bar	220 bar
PA50, PS50R PA50M, PA50RM	197	149	111	241	127	–	102 x 229	220	2,05	1,76	1,41	0,45 †
PA50R2	260	203	178	292	241	–	130 x 181	220	2,05	1,76	1,41	0,45 †
PA50D	264	149	111	241	127	229	102	220	2,05	1,76	1,41	0,45 †

* Typical delivery. Actual flow will vary with field conditions.
† PA50 Series measured at 220 bar.

- Serviceable air motor for economical repair.
- Air inlet filter protects motor. Filter in outlet port protects against contaminated systems.
- Assorted reservoirs to suit your application's requirements.
  * input air port inside thread size 1/4"NPT

Typical Set-up
Hook-up for single-acting cylinders



PA50R2

For use with Cyl. Type	Description	Order No.	Valve No.	Air Supply Req'd bar	Reservoir Cap. (l)	Reservoir Usable (l)	Oil Port (in)	Prod. Wt (kg)
Single-Acting	Base model pump with high density polyethlene reservoir.	**PA50**	–	3 - 8	1,7	1,6	3/8-NPTF	6,4
Single-Acting	PA50, except has metal reservoir.	**PA50M**	–	3 – 8	1,7	1,6	3/8-NPTF	7,3
Single-Acting	PA50, except has 3.7 meter 12 foot remote control.	**PA50R**	–	3 - 8	1,7	1,6	3/8-NPTF	8,4
Single-Acting	PA50R, except has metal reservoir.	**PA50RM**	–	3 - 8	1,7	1,6	3/8-NPTF	9,3
Single-Acting	PA50R, except has 7.6 liter reservoir 2 gallon reservoir.	**PA50R2**	–	3 - 8	7,6	7,3	3/8-NPTF	12,9
Single- and Double Acting	PA50, except designed to operate either single- or double-acting systems. Valve function: Advance/Return.	**PA50D**	9504, 3-way/ 4-way	3 - 8	1,7	1,6	3/8-NPTF	8,3

Notes: Air inlet port 1/4" NPTF. Requires 570 l at 7 bar shop air pressure at the pump.

CYLINDER/PUMP MATCHING Page 6
CYLINDERS Page 12
PUMP/CYLINDER SETS Page 61
PUMP ACCESSORIES Page 116
HYDRAULIC ACCESSORIES Page 120

Air Pump
HYDRAULIC PA17 SERIES

279 cm³/min.
Two Speed

Rotary-style air motor. Use where air is preferred source of energy, where electricity is unavailable or sparks are a concern.

- Two-speed operation for high speed cylinder advance.
- Durable 7,6 liter thermoplastic reservoir. (Metal reservoir conversion kits are available.)
- Features air motor capable of starting under full load.

The PA17 used with a flange spreader

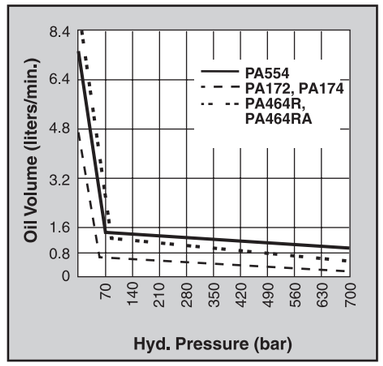

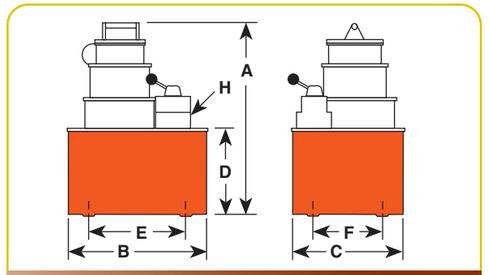

PA172

Pump No.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	H (mm)	Max. Pressure Output bar	Oil Del. * (l/min) 0 bar	7 bar	70 bar	350 bar	700 bar
PA172	359	289	235	178	181	130	³/₈-NPTF	700	4,6	3,8	0,4	0,4	0,3
PA174	359	289	235	178	181	130	³/₈-NPTF	700	4,6	3,8	0,4	0,4	0,3

* Typical delivery. Actual flow will vary with field conditions.

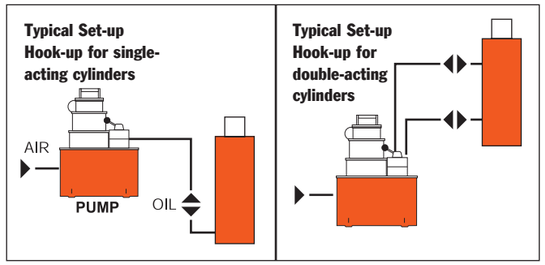

700 bar

PA174

For use with Cyl. Type	Description	Order No.	Valve No.	Valve Function	Air Supply Req'd bar	Reservoir Cap. (l)	Reservoir Usable (l)	Prod. Wt (kg)
Single-Acting	Base model pump with 7.6 liter 2 gallon thermoplastic reservoir.	**PA172**	9517, 2-way	Advance/Return*	3 - 8	7,6	4,7	18,1
Single- and Double Acting	PA172, except has 9500 valve for use with single- or double-acting cylinders.	**PA174**	9500, 4-way	Advance Hold Return*	3 - 8	7,6	4,7	18,6

Note: Requires 570 l at 6 bar shop air pressure at the pump. dBA 85/90 at 700 bar.

* Holds pressure in advance position when valve motor is shut off, in return position with motor running. Pump will build pressure when motor is shut off, oil returns to reservoir.

CYLINDER/PUMP MATCHING Page 6
CYLINDERS Page 12
PUMP/CYLINDER SETS Page 61
PUMP ACCESSORIES Page 116
HYDRAULIC ACCESSORIES Page 120

PUMPS

Air Pump
HYDRAULIC PA46/55 SERIES

Up to 150 ton Cylinders
754-902 cm³/min.
Two Speed

Rotary-style air motor.
Use where air is the preferred source of energy.

- 2,2 kW motor starting under full load.
- Two-speed operation for rapid cylinder advance.
- Models available with full remote control over advance and return, (except PA554).
- Tandem center valve holds the load when pump is shut off.

700 bar

PA462

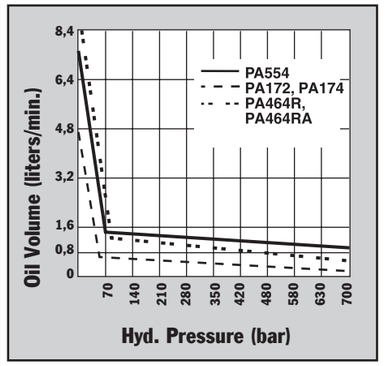

PA554 pump and RH2008 Center Hole cylinder used to tension cables.

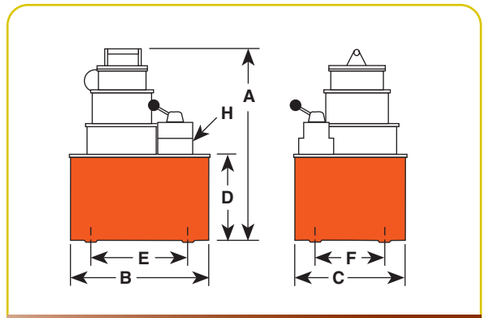

Pump No.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	H (mm)	Max. Pressure Output bar	Oil Del. * (l/min) 0 bar	7 bar	70 bar	350 bar	700 bar
PA462	381	292	241	178	254	203	3/8 NPTF	700	7,4	7,2	0,8	0,8	0.7
PA464	381	292	241	178	254	203	3/8 NPTF	700	7,4	7,2	0,8	0,8	0,7
PA464R	381	292	241	178	254	203	3/8 NPTF	700	7,4	7,2	0,8	0,8	0,7
PA464RA	381	292	241	178	254	203	3/8 NPTF	700	7,4	7,2	0,8	0.8	0,7
PA554	483	292	241	178	254	203	3/8 NPTF	700	7,4	7,2	1,3	1,1	0,7

* Typical delivery. Actual flow will vary with field conditions.
Note: Four mounting holes ½" - 20

PA464R

PA554

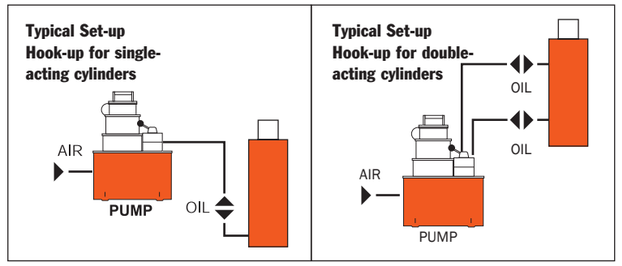

For use with Cyl. Type	Description	Order No.	Valve No.	Valve Function	Air Supply Req'd bar	Reservoir Cap. (l)	Reservoir Usable (l)	Prod. Wt (kg)
Single-Acting	Base model pump with 9,5 l steel reservoir.	**PA462**	9584, 2-way	Advance/Hold/ Return	3 – 8	9,5	9,4	27,2
Single- and Double Acting	PA462, except has 9500 valve capable of running 2 single-acting cylinders or one double-acting cylinder.	**PA464**	9500, 4-way	Advance/Hold/ Return*	3 – 8	9,5	9,4	27,6
Single- and Double Acting	PA462 with air actuated valve for full remote control over advance and return. Includes 3,7m remote control.	**PA464R†**	9594, 4-way	Advance/Hold/ Return	3 – 8	9,5	9,4	35,3
Single- and Double Acting	PA464R except, has automatic dump feature. 7,6 m remote control.	**PA464RA**	**† 4-way	9594, Return*	Advance/Hold/	3 – 8 9,5	9,4	35,8
Single- and Double Acting	High performance pump with 9,5 l steel reservoir.	**PA554**	9500, 4-way	Advance/Hold/ Return*	3 - 8	9,5	8,4	32,0

Note: Requires 570 l at 6 bar shop air pressure at the pump. dBA 85/90 at 700 bar.
* Holds when motor is shut-off and valve is in "advance" position.
† The PA464RA has an "automatic dump" feature. Pressure is not held when operator releases "advance" or "return" button. PA464R will "hold" only in the "advance" position with the motor shut off.
** Not to be used for lifting.

CYLINDER/PUMP MATCHING Page 6
CYLINDERS Page 12
PUMP/CYLINDER SETS Page 61
PUMP ACCESSORIES Page 116
HYDRAULIC ACCESSORIES Page 120

Air Operated
PUA & PMA SERIES

2410 bar

Suitable for pumping a wide range of fluids at pressures up to 35,000 psi (2,410 bar).

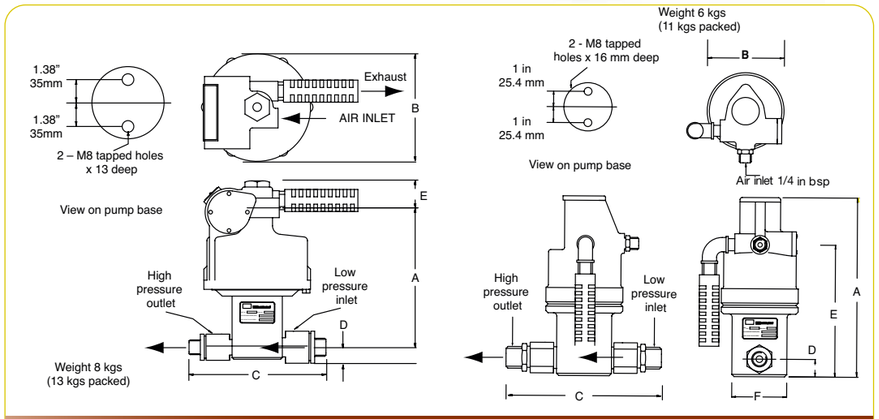

CAT #	RAM/DIAMETER (mm)	(in)		A	B	C	D	E	F
PUA26(B/U)	31.75	1 1/4	in	9.17	4.02	6.61	.87	6.69	2.87
			mm	233	102	168	22.2	170	73
PUA70(B/U)	19	3/4	in	8.74	4.02	6.61	.87	6.22	2.87
			mm	222	102	168	22.2	158	73
PUA157(B/U)	12.7	1/2	in	8.74	4.02	6.61	.87	6.22	2.87
			mm	222	102	168	22.2	158	73
PUA275(B/U)	9.53	3/8	in	8.74	4.02	6.61	.87	6.22	2.87
			mm	222	102	168	22.2	158	73
PUA430(B/U)	7.94	5/16	in	8.74	4.02	6.61	.87	6.22	2.87
			mm	222	102	168	22.2	158	73
PUA655(B/U)	6.35	1/4	in	8.74	4.02	6.61	.87	6.22	2.87
			mm	222	102	168	22.2	158	73
PUA982(B/U)	5.13	.202	in	8.74	4.02	6.61	.87	6.22	2.87
			mm	222	102	168	22.2	158	73
PMA27(B/U)	76.2	3	in	8.66	7.01	9.06	1.5	1.89	
			mm	220	178	230	38	48	
PMA60(B/U)	50.8	2	in	8.27	7.01	9.06	1.5	1.89	
			mm	210	178	230	38	48	
PMA90(B/U)	41.3	1 5/8	in	8.27	7.01	9.06	1.5	1.89	
			mm	210	178	230	38	48	

CAT #	RAM/DIAMETER (mm)	(in)		A	B	C	D	E	F
PMA130(B/U)	35	1 3/8	in	7.99	7.01	7.68	.87	1.89	
			mm	203	178	195	22	48	
PMA190(B/U)	28.5	1 1/8	in	7.99	7.01	7.68	.87	1.89	
			mm	203	178	195	22	48	
PMA240(B/U)	25.4	1	in	7.99	7.01	7.68	.87	1.89	
			mm	203	178	195	22	48	
PMA370(B/U)	20.6	13/16	in	7.99	7.01	7.01	.87	1.89	
			mm	203	178	178	22	48	
PMA520(B/U)	17.5	11/16	in	7.99	7.01	7.01	.87	1.89	
			mm	203	178	178	22	48	
PMA770(B/U)	14.3	9/16	in	7.99	7.01	7.01	.87	1.89	
			mm	203	178	178	22	48	
PMA980(B/U)	12.7	1/2	in	7.99	7.01	7.01	.87	1.89	
			mm	203	178	178	22	48	
PMA1740(B/U)	9.5	3/8	in	7.99	7.01	10.08	.87	1.89	
			mm	203	178	256	22	48	
PMA2410(B/U)	8	5/16	in	7.99	7.01	10.08	.87	1.89	
			mm	203	178	256	22	48	

- Provides infinitely variable capacity and discharge pressure
- Suitable for continuous start/stop applications
- Pumps oil, water, and other fluids
- Stainless steel pump and check valves standard
- Maintains pressure with minimal power consumption (Non-load holding)
- Usable in hazardous areas: per ATEX II, CAT. 2 GDcT5
- Quiet operation
- Can operate on gases other than air
- Simple to install and maintain
- Compact, rugged design
- Only 15psi (1bar) air pressure required to start pump

BSP FITTINGS	NPT FITTINGS	RATIO 1:	OUTLET PRESSURE (BAR)	(PSI)	OUTPUT PER CYCLE (LITRES)	(IN³)	MAXIMUM FLOW AT ZERO PRESSURE (LITRES/MIN)	(IN³/MIN)	INLET	OUTLET
PUA26B	PUA26U	4.3	26	380	0.028	1.68	14	850	1/2" BSP/NPT	1/2" BSP/NPT
PUA70B	PUA70U	11.9	70	1,010	0.01	0.607	5	305	1/2" BSP/NPT	1/2" BSP/NPT
PUA157B	PUA157U	26.7	157	2,280	0.004	5.269	2.4	146	1/2" BSP/NPT	1/2" BSP/NPT
PUA275B	PUA275U	47.5	275	3,990	0.0025	0.151	1.4	85	1/2" BSP/NPT	1/2" BSP/NPT
PUA430B	PUA430U	68.4	430	6,230	0.0017	0.105	0.9	55	1/2" BSP/NPT	1/2" BSP/NPT
PUA655B	PUA655U	107	655	9,500	0.0011	0.67	0.6	36	1/2" BSP/NPT	1/2" BSP/NPT
PUA982B	PUA982U	163.8	982	14,250	0.0007	0.044	0.4	24	1/2" BSP/NPT	1/2" BSP/NPT
PMA27B	PMA27U	4	27	390	0.16	9.72	37	2260	1" BSP/NPT	3/4" BSP/NPT
PMA60B	PMA60U	9	60	870	0.07	4.32	23	1400	1" BSP/NPT	3/4" BSP/NPT
PMA90B	PMA90U	13.6	90	1,300	0.05	2.85	15	915	1" BSP/NPT	3/4" BSP/NPT
PMA130B	PMA130U	19	130	1,880	0.034	2.04	11	670	3/4" BSP/NPT	1/2" BSP/NPT
PMA190B	PMA190U	28.4	190	2,750	0.023	1.37	7.3	455	3/4" BSP/NPT	1/2" BSP/NPT
PMA240B	PMA240U	36	240	3,480	0.018	1.08	5.8	354	3/4" BSP/NPT	1/2" BSP/NPT
PMA370B	PMA370U	54.5	370	5,360	0.012	0.71	3.8	230	1/2" BSP/NPT	1/2" BSP/NPT
PMA520B	PMA520U	76.5	520	7,540	0.008	.51	2.8	170	1/2" BSP/NPT	1/2" BSP/NPT
PMA770B	PMA770U	113	770	11,160	0.006	0.34	1.8	110	1/2" BSP/NPT	1/2" BSP/NPT
PMA980B	PMA980U	145	980	14,210	0.004	0.27	1.5	91	1/2" BSP/NPT	1/2" BSP/NPT
PMA1740B	PMA1740U	256	1,740	25,230	0.0025	0.15	0.84	51	1/2" BSP/NPT	1/2" HP
PMA2410B	PMA2410U	368	2,410	35,000	0.0017	0.104	0.58	35	1/2" BSP/NPT	1/2" HP

Air Operated
PUA & PMA SERIES

Performance charts

Suitable for pumping a wide range of fluids at pressures up to 35,000 psi (2,410 bar).

PUMPS



PUA-4:3:1



PUA-11:9:1



PUA-26.7:1



PUA-47.5:1



PUA-68.4:1



PUA-107:1



PUA-163.8:1

100 psi	=	6,89 bar
85 psi	=	5,85 bar
70 psi	=	4,82 bar
55 psi	=	3,79 bar
40 psi	=	2,76 bar



PMA-4:1



PMA-9:1



PMA-13.6:1



PMA-19:1



PMA-28.4:1



PMA-36:1



PMA-54.5:1



PMA-76.5:1



PMA-113:1



PMA-145:1



PMA-256:1



PMA-368:1

PUMPS

Electric/Battery Pump
HYDRAULIC PE10 SERIES

Up to 25 Ton Quarter Horse®
Two Speed

High performance in compact package. Electric and battery powered models for powering tools and cylinders up to 25 ton.

LR19814



- Portable power source for hydraulic cylinders, and tools.
- Permanent magnet motor starts easily under load, even with reduced voltage conditions.
- Battery-operated models have 2,4 m power cord with alligator clips to connect to any 12 volt battery.
- Optional rechargeable battery pack with shoulder strap for maximum portability.
- Pump typically delivers 15 minutes of continuous operation at 700 bar on a single battery.
- Pump can be operated in any position.
- 24 volt hand and foot switches available for all AC powered models.
- High-impact housing with flame-retardant construction.
- Base mounting holes for fixed installations.

For use with Cyl. Type	Description	Order No.	Valve Type	Valve No.	Valve Function	Control Switch	Motor	Reservoir Usable Cap. (l)
Single-Acting	Base model pump with 0,19 KW motor. Bladder type reservoir, 110 volt power required.	**PE102 -E220**	2-Way/ Auto. Dump	9561	Advance Return (Auto.)*	Rocker Type off, Momentary on	0,19 KW, 110/115V 50/60 Hz, Single Phase	1
Single-Acting	PE102, except has automatic dump valve.	**PE102A -E220**	Auto. Dump	9562	Advance Return**	Rocker Type off, Momentary on	0,19 KW, 110/115V 50/60 Hz, Single Phase	1
Single-Acting	PE102, except requires 220 volt.	**PE102-E220**	2-Way/ Auto. Dump	9561	Advance Return (Auto.)*	Rocker Type off, Momentary on	0,19 KW, 110/115V 50/60 Hz, Single Phase	1
Single-Acting	PE102A, except requires 220 volt.	**PE102A-E220**	Auto. Dump	9562	Advance Return	Rocker Type off, Momentary on	0,19 KW, 220/230V 50/60 Hz, Single Phase	1
Single-Acting	PE102, except requires 12 volt DC.	**PR102**	2-Way/ Auto. Dump	9561	Advance Return (Auto.)*	Rocker Type off, Momentary on	0,19 KW, 12V†	1
Single-Acting	PE102A, except requires 12 volt DC.	**PR102A**	Auto. Dump	9562	Advance Return**	Rocker Type off, Momentary on	0,19 KW, 12V†	1
Single-Acting/ Double-Acting	Base model pump has 4-way valve for operating double-acting systems. 110 volt power required.	**PE104 -E220**	4-Way	9563	Advance Hold Return	Rocker Type off, Momentary on	0,19 KW, 110/115V 50/60 Hz, Single Phase	1
Single-Acting/ Double-Acting	PE104, except requires 220 volt.	**PE104-E220**	4-Way	9563	Advance Hold Return	Rocker Type off, Momentary on	0,19 KW, 220/230V 50/60 Hz, Single Phase	1
Single-Acting/ Double-Acting	PE104, except requires 12 volt DC.	**PR104**	4-Way	9563	Advance Hold Return	Rocker Type off, Momentary on	0,19 KW, 12V†	1

* "Advance" position holds pressure with motor shut off. "Return" position advances cylinder with motor running and returns cylinder with motor shut off. Also available in CE / E 110

** Cylinder advances with motor running and automatically returns with motor shut off.

† Comes with an 2,4 m. alligator clip cord for 12 volt DC use.

PR104

700 bar

The Quarter Horse pump has a maximum operating pressure of 700 bar, which handles a wide variety of hand held hydraulic tools.

Accessories

BP212VQ

BC 212

BP212VQ – Optional 12 volt battery pack. Includes sealed lead acid battery, 115V charger, 1,2 m cord, carrying case and shoulder strap. Wt., 8 kg.

RB12V – Battery only.
BP12INT – Battery with cord and carrying case. Wt., 5 kg.
RC12V – Replacement 1,2 m battery cord only. Wt., 0,2 kg.

BC212 – Battery charger for U.S.A. Wt., 3 kg.
BC212EUR – Battery charger for Europe. Wt., 3 kg.
25017 – Remote hand control with 3 m cord. Wt., 0,4 kg.

Max. Pump No.	Pressure Output (bar)	dBa @ Idle and 700 (bar)	Oil Del. (l/min at..) 0 (bar)	700 (bar)	Overall Dimensions (mm)	Prod. Wt. with Oil (kg)
PE10 Series PR10 Series	700	68-74*	1,9	0,16	330 L x 197 W x 203 H	9,1

* Measured at 0,9 m distance, all sides.

NOTE: PR10 rechargeable model is equipped with 2,4 m cord with alligator clips. Order optional battery pack (No. BP212VQ) or use with any 12 volt battery.

NOTE: Amp draw at 700 bar; 6 amp at 115 volt, 3 amp at 230 volt, and 35 amp at 12 volt.

9560 – Pressure regulator. Adjustable from 70 to 700 bar. All mounting hardware included. Wt., 1,4 kg.

251660 – Foot switch with 3 m cord. Single pole, double throw, 15 amp @ 125-250 VAC. Wt., 0,45 kg.

CYLINDER/PUMP MATCHING Page 6
CYLINDERS Page 12
PUMP/CYLINDER SETS Page 61
PUMP ACCESSORIES Page 116
HYDRAULIC ACCESSORIES Page 120

Electric Pump
HYDRAULIC PE17 SERIES

Up to 55 Ton
279 cm³/min.
2 Speed

For maintenance and construction applications.

- For use with single-acting or double-acting cylinders at operating pressures to 700 bar.
- For intermittent duty; starts under full load.
- Equipped with 0,37Kw (1/2 hp), 3,450 rpm, single-phase, thermal protected induction motor; 3 m remote control cord (PE172S has 7,6 m cord)
- Low amperage draw; small generators and low amperage circuits can be used as power source.
- Extremely quiet noise level (67-81 dBA).

PE172

700 bar

LR19814

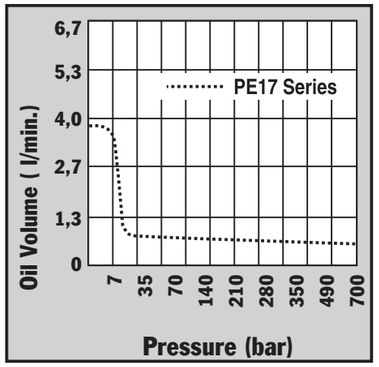



Pump No.	Max. Pressure Output bar	rpm	dBA at Idle and 700 bar	Amp Draw 220 V – at 700 bar	Oil Del. (liters./min. @) † 0 bar	7 bar	350 bar	700 bar	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Prod. Wt. with Oil (kg)
PE17 Series	700	2850	67/81*	5	3,9	2,5	0,3	0,2	470	178	289	181	378	235	130	20,4
PE17M Series	700	2850	67/81*	5	3,9	2,5	0,3	0,2	460	168	292	–	368	241	–	24,0

* Measured at 0,9 m distance, all sides.
† Typical delivery. Actual flow will vary with field conditions.

PE172SM

PE174

CE

Description	Order No.	Valve Type	Valve No.	Valve Function	Control Switch ††	Motor	Reservoir Usable (l)
Base model pump with 0,37 KW pump with 7,6 l thermoplastic reservoir.	**PE172-50-220**	2-Way	9517	Advance Return (Auto†)	Remote Motor Control (3,1m) on/off	0,37 kW, 220 V* 50/60 Hz, Single Phase	4,72
PE172-50-220, except has 9,5 l aluminum reservoir.	**PE172M-50-220**	2-Way	9517	Advance Return (Auto†)	Remote Motor Control (3,1m) on/off	0,37 kW, 220 V* 50/60 Hz, Single Phase	6
PE172-50-220, except has solenoid operated valve.	**PE172S-50-220**	3-Way	9570	Advance Hold Return	Remote Motor & Valve (7,6 m)	0,37 kW, 220 V* 50/60 Hz, Single Phase	4,72
PE172S-50-220, except has aluminum reservoir.	**PE172SM-50-220**	3-Way	9570	Advance Hold Return	Remote Motor & Valve (7,6 m)	0,37 kW, 220 V* 50/60 Hz, Single Phase	6
Best suited for crimping, punching, pressing. Not for lifting.Thermoplastic reservoir.	**PE172A-50-2208**	Auto./Dump Manifold	45554	Advance Return	Remote Motor Control (3,1 m) on/off	0,37 kW, 220 V* 50/60 Hz, Single Phase	4,72
PE172A, except has aluminum reservoir.	**PE172AM-50-2208**	Auto./Dump Manifold	45554	Advance Return	Remote Motor Control (3,1 m) on/off	0,37 kW, 220 V* 50/60 Hz, Single Phase	6
0,37 KW pump with 7,6 l thermoplastic reservoir. Meets CE requirements.	**PE172-E220**	2-Way	9517	Advance Return (Auto+)	Remote Motor Control (3,1 m) on/off	0,37 kW, 220 V* 50 Hz, Single Phase	4,72
PE172-50-220,except has 9,5l aluminium reservoir. Meets CE requirements	**PE172M-E220**	2-Way	9517	Advance Return (Auto+)	Remote Motor Control (3,1 m) on/off	0,37 kW, 220 V* 50 Hz, Single Phase	6
PE172-50-220,except has solenoid operated valve.Meets CE requirements	**PE172S-E220**	3-Way	9570	Advance Hold Return	Remote Motor & Valve (3,1m)	0,37 kW, 220 V* 50 Hz, Single Phase	4,72
PE172S-50-220 except has aluminium reservoir. Meets CE requirement	**PE172SM-E220**	3-Way	9570	Advance Hold Return	Remote Motor & Valve (3,1m)	0,37 kW, 220 V* 50 Hz, Single Phase	6
Best suited for crimping,punching,pressing. Thermoplastic res.Meets CE requirement	**PE172A-E220∞**	Auto./Dump Manifold	45554	Advance/Return	Remote Motor Control (3,1 m) on/off	0,37 kW, 220 V* 50 Hz, Single Phase	4,72
PE172A,except has aluminium reservoir. Meets CE requirements	**PE172AM-E220∞**	Auto./Dump Manifold	45554	Advance/Return	Remote Motor Control (3,1 m) on/off	0,37 kW, 220 V* 50 Hz, Single Phase	6
PE172-50-220, except has 9500 double-acting valve.	**PE174-50-220**	4-Way	9500	Advance Hold Return**	Remote Motor Control (3,1 m) on/off	0,37 kW, 220 V* 50/60 Hz, Single Phase	4,72
Same as PE174-50-220, except has aluminum reservoir.	**PE174M-50-220**	4-Way	9500	Advance Hold Return**	Remote Motor Control (3,1 m) on/off	0,37 kW, 220 V* 50/60 Hz, Single Phase	6
PE172-50-220, except has 9500 double-acting Valve. Meets CE requrements	**PE174-E220**	4-Way	9500	Advance Hold Return**	Remote Motor Control (3,1 m) on/off	0,37 kW, 220 V* 50 Hz, Single Phase	4,72
Same as PE174-50-220, except has aluminium Reservoir. Meets CE requirements	**PE174M-E220**	4-Way	9500	Advance Hold Return	Remote Motor Control (3,1 m) on/off	0,37 kW, 220 V* 50 Hz, Single Phase	6

* Available with 115V., 60 Hz motor (to order , remove suffix "50-220" behind pump order number).
** "Advance" position holds pressure with motor shut off.
† "Advance" position holds pressure with motor shut off. "Return" position advances cylinder with motor running and returns cylinder with motor shut off.
∞ Not to be used for lifting.

NOTE: Usable oil is calculated with the oil fill at the recommended maximum level of 38 mm below reservoir cover plate.
‡ **Some Power Team pumps are available in special configurations not listed in this catalog. Power Team can "Assemble to Order" pumps with special seals, voltages, valves, relief valve settings, etc. For your special requirements please consult your local distributor or the Power Team factory.**

Also available in CE 110

CYLINDER/PUMP MATCHING Page 6
CYLINDERS Page 12
PUMP/CYLINDER SETS Page 61
PUMP ACCESSORIES Page 116
HYDRAULIC ACCESSORIES Page 120

PUMPS

Electric Pump
HYDRAULIC PE18 SERIES

Up to 55 Ton
295 cm³/min.
Vanguard Jr. Series®

Ideal for use with small hydraulically powered tools.

PUMPS

- Vanguard Jr.® pumps provide two-speed high performance in a light-weight, compact package.
- Gauge port provided on pump. Metal reservoir on all models.
- Equipped with a 0,37Kw (1/2 hp), 220 volt, 50 Hz single phase motor that starts under load, even at reduced voltage.
- Low amperage draw permits use with smaller generators and low amperage circuits.
- All pumps have a 3 m remote control (PE183C has 7,6 m remote control).
- CSA rated for intermittent duty. Noise level of 85-90 dBA.



PE182

For operating hydraulic crimping, cutting or other tools:

- **No. PE183C** - For crimping or pressing applications. Has special electrical circuitry to pulse/advance, hold at full pressure, build to a predetermined pressure, release and reset circuit. Features separate emergency return switch.
- **No. PE184C** - Allows you to alternately operate a spring-return cutting and/or crimping tool without disconnecting either tool. Select port connection with manual 4-way valve, start pump with remote control hand switch and extend connected tool. When hand switch is switched to off, pump stops and automatic valve opens, allowing tool to return. In center (neutral) position, manual control valve holds tool in position at time valve is shifted.



700 bar

LR19814

Pump No.	Max. Pressure Output bar	rpm	dBA at Idle and 700 bar	Amp Draw 220 V at 700 bar	Oil Del. (liters./min. @) † 0 bar	7 bar	350 bar	700 bar	A (mm)	B (mm)	C (mm)	D (mm)	F (mm)	G (mm)	Prod. Wt. with Oil (kg)
PE182	700	12.000	85/90**	4,5 Amp.	3,7	3,0	0,4	0,3	406	121	203	181	152	130	13,6
PE183	700	12.000	85/90**	4,5 Amp.	3,7	3,0	0,4	0,3	406	121	203	181	152	130	13,6
PE183A	700	12.000	85/90**	4,5 Amp.	3,7	3,0	0,4	0,3	406	121	203	181	152	130	13,6
PE184	700	12.000	85/90**	4,5 Amp.	3,7	3,0	0,4	0,3	406	121	203	181	152	130	13,6
PE183-2*	700	12.000	85/90**	4,5 Amp.	3,7	3,0	0,4	0,3	470	184	292	254	241	203	19,0
PE184-2*	700	12.000	85/90**	4,5 Amp.	3,7	3,0	0,4	0,3	470	184	292	254	241	203	19,0
PE183C ††	700	12.000	85/90**	4,5 Amp.	3,7	3,0	0,4	0,3	406	121	203	181	152	130	13,6
PE184C ††	700	12.000	85/90**	4,5 Amp.	3,7	3,0	0,4	0,3	406	121	203	181	152	130	13,6

* 9,5 l reservoir.
** Measured at 0,9 m distance, all sides.
† Typical delivery. Actual flow will vary with field conditions.
†† Special application pumps for cutting, crimping or pressing.

Power Team®

PE183-2

PE183C

PUMPS

For use with cyl. type	Description	Order No.	Valve Type	Valve Function	Control Switch	Motor	Reservoir Usable (l)
Single-acting	Base model pump has 0,37 KW pump with 2-Way valve and 1,9 l reservoir.	**PE182-50-220**	2-Way	Advance Return†	Remote Motor Control (3,1 m) on/off	0,37 kW, 220 V** 50 Hz, A.C., Single Phase	1,7
Single-acting	PE182-50-220, except has 3-way valve.	**PE183-50-220**	3-Way	Advance Hold Return	Remote Motor Control (3,1 m) on/off	0,37 kW, 220 V** 50 Hz, A.C., Single Phase	1,7
Single-acting	PE183-50-220, except has 9,5 l reservoir.	**PE183-2-50-220**	3-Way	Advance Hold Return	Remote Control (3,1 m)	0,37 kW, 220 V** 50 Hz, A.C., Single Phase	8,4††
Single-acting	PE183-50-220, except has "dump valve".	**PE183A-50-220∞**	Auto./Dump Pump	Advance Return	Remote (3,1 m)	0,37 kW, 220 V** 50 Hz, A.C., Single Phase	1,7
Single-acting	Special crimping pump. See details on page 74.	**PE183C-50-220∞**	Special, for crimping only	Advance Hold Return	Remote Motor Control (7,6 m) on/off	0,37 kW, 220 V** 50 Hz, A.C., Single Phase	1,7
Single-acting/ double-acting	Base model pump has 0,37 KW pump for double-acting systems with 1,9 l reservoir.	**PE184-50-220**	4-Way	Advance Hold Return†	Remote Motor Control (3,1 m) on/off	0,37 kW, 220 V** 50 Hz, A.C., Single Phase	1,7
Single-acting/ double-acting	PE184, except with 9,5 l reservoir.	**PE184-2-50-220**	4-Way	Advance Hold Return†	Remote Motor Control (3,1 m) on/off	0,37 kW, 220 V** 50 Hz, A.C., Single Phase	8,4††
Single-acting/ double-acting	Special crimping pump. See details on page 74.	**PE184C-50-220***	4-Way	Advance Return	Remote Control (3,1 m) on/off	0,37 kW, 220 V** 50 Hz, A.C., Single Phase	1,7

* Also for use with special single-acting cylinder applications.
** Available with 115 Volt, 50 Hz motor (to order, remove suffix "50-220" behind pump order number). Specify voltage when ordering.
† Holds when motor is shut off and valve is in "advance" position.
†† Pumps supplied with 7,6 l oil (usable oil is 5,7 l), will hold 9,5 l when filled to within 13 mm below reservoir cover plate.
∞ Not to be used for lifting.

CYLINDER/PUMP MATCHING Page 6
CYLINDERS Page 12
PUMP/CYLINDER SETS Page 61
PUMP ACCESSORIES Page 116
HYDRAULIC ACCESSORIES Page 120

Electric Pump
PE21 SERIES

Up to 75 Ton
361 cm³/min.
Two-Speed

Low-speed, high-torque for heavy-duty, extended-cycle operations.



- Totally enclosed, fan cooled induction motor: 0,75Kw (1 hp), 1,725 rpm, 60 Hz, single phase. Thermal overload protection.
- Remote control, with 3,1 m cord is standard on pumps with solenoid valves. Manual valve pumps have "Stop", "Start" and "Run/Off/Pulse" switches. Pump controls are moisture and dust resistant.
- Motor drip cover with carrying handles and lifting lug.
- Low noise level of 70 dBA® 700 bar.
- In the event of electrical interruption, pump shuts off and will not start up until operator presses the pump start button.
- 24 volt control circuits on units with remote controls provide additional user/operator safety.

PE213

PE214

700 bar

LR19814

PE214S

PE21 series pump and RD5513 cylinder used in a special press that produces pharmaceutical-grade extracts for herbal medicines.



Pump No.	Max. Pressure Output bar	rpm	dBA at Idle and 700 bar	Oil Del. (l/min. at.) 7 bar	70 bar	350 bar	700 bar	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	J (mm)	K*** (in)	Prod. Wt. w/Oil (kg)
PE21 Series	700	1.437	70*	3,6	0,4	0,4	0,3	543	292	241	165	254	203	359	241	82,6	¼-20 UNF	44,4†

* Measured at a 0,9 m distance, all sides.
*** For 50,8 mm dia. swivel casters, order (4) No. 10494.
† Shipping weight with manual valve; add 6,4 kg for pump with solenoid valve.

For use with cyl.-type	Description	Order No.	Valve Type	Valve No.	Valve Function	Max. Amp Draw at 700 bar	Motor	Reservoir Usable (l)
Single-acting	0,75 KW pump with 9,5 l Reservoir and manual valve.	**PE213-50-220**	3-Way	9520*	Advance Hold Return	230 V - 7,5 amps	0,75 KW, 220 Volt 50 Hz, Single Phase	590
Single-acting	PE213, except has solenoid operated remote valve.	**PE213S-50-220**	3-Way	9599†	Advance Hold Return	230 V - 7,5 amps	0,75 KW, 220 Volt 50 Hz, Single Phase	590
Double-acting	0,75 KW pump with 9,5 l Reservoir and manual valve.	**PE214-50-220**	4-Way	9506*	Advance Hold Return	230 V - 7,5 amps	0,75 KW, 220 Volt 50 Hz, Single Phase	590
Double-acting	PE214, except has solenoid operated remote valve.	**PE214S-50-220**	4-Way	9512†	Advance Hold Return	230 V - 7,5 amps	0,75 KW, 220 Volt 50 Hz, Single Phase	590

* Manual valve. Pump is equipped with RUN/OFF/PULSE switch for control of motor.
† Solenoid valve. Pump is equipped with a remote control switch with 3,1 m cord.

Some Power Team pumps are available in special configurations not listed in this catalog. Power Team can "Assemble to Order" pumps with special seals, voltages, valves, relief valve settings, etc. For your special requirements please consult your local distributor or the Power Team factory.

CYLINDER/PUMP MATCHING Page 6
CYLINDERS Page 12
PUMP/CYLINDER SETS Page 61
PUMP ACCESSORIES Page 116
HYDRAULIC ACCESSORIES Page 120

PUMPS

Electric Pump
HYDRAULIC PED SERIES

410 cm³/min.
Two-Speed

Ideal for running multiple tools or cylinders from one power unit. Recommended for cylinders up to 75 tons.



- Two-speed pumps have the same low pressure and high pressure flows from both valves.
- Flows and pressures of each pump are independent.
- Delivers 4,8 l/min. of oil at 7and 0,4 l/min. at 700 bar from each pump.
- 1,12 KW, 220 volt, 50 Hz induction motor, 3,1 m remote control and 19 l steel reservoir.
- Models available for operating single-acting or double-acting cylinders.
- Each power unit contains two separate pumps and two separate valves allowing operator to control multiple processes with one power unit.
- Both pumps on each power unit are equipped with an externally adjustable pressure relief valve.
- Not recommended for frequent starting and stopping.

PED253

700 bar

PED254

PED254S



Pump No.	Max. Pressure Output bar	rpm	dBA at Idle and 700 bar	(220 V)** Amp Draw At 700 bar	Oil Del. (l/min at..) 7 bar	50 bar	350 bar	700 bar	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Prod. Wt. w/Oil (kg)
PED-Series	700	2.874	87/85*	11	4,8	0,6	0,6	0,4	527	457	292	216	419	229	457	330	77

* Noise level reading (dBA) measured at a 0,9 m distance, all sides.

** Amp draw at 700 bar, 230 Volts 50 Hz is 15 Amps.

For use with cyl.-type	Description	Order No.	Valve Type	Valve No.	Valve Function	Control Switch ††	Motor	Reservoir Usable (l)
Single-acting	1,12 KW pump with 19 l reservoir. Valve has "Posi-Check®" feature.	**PED253-50-220**	3-Way	9520	Advance Hold Return	Remote Motor	1,12 KW, 220 VAC 50 Hz††, Single Phase	16
Double-acting	1,12 KW pump with 19 l reservoir. Valve has "Posi-Check®" feature.	**PED254-50-220**	4-Way	9506	Advance Hold Return	Remote Motor	1,12 KW, 220 VAC 50 Hz††, Single Phase	16
Double-acting	PED254, except has solenoid operated remote valve.	**PED254S-50-220**	4-Way	9513	Advance Hold Return	Remote Valve	1,12 KW, 220 VAC 50 Hz††, Single Phase	16

†† Control switch wired with line voltage. All remotes are 3,1 m long.

CYLINDER/PUMP MATCHING Page 6
CYLINDERS Page 12
PUMP/CYLINDER SETS Page 61
PUMP ACCESSORIES Page 116
HYDRAULIC ACCESSORIES Page 120

Electric Pump
HYDRAULIC PE30 SERIES

0,48 l/min.
Two-Speed
Vanguard® Series

Ideal for maintenance and construction applications

PUMPS



- Deliver a powerful punch to operate single-acting or double-acting cylinders.
- Integral roll cage protects pump from abuse.
- 0,75Kw (1 hp), single phase, permanent magnet motor.
- High performance to weight ratio.
- Starts under full load even when voltage is reduced to 50% of nominal rating.
- Quiet operation: 87 dBA @ 700 bar and 82 dBA @ 0 bar. CSA rated for intermittent duty.
- Remote controls and/or solenoid valves feature 24 volt controls.

PE302S

PE30TWP
Torque Wrench Applications
See page 171



Pump No.	Max Pressure Output bar	Noise level at 700 bar (dBA)	Amp.Draw 220V at 700 bar (A)	Oil Del. (l/min at..) 7 bar	35 bar	70 bar	350 bar	700 bar	Overall Dimensions (mm)	Prod. Wt. With Oil (kg)
PE30 Series with 4,7 l res.	700	87/82	7	4,8	3,2	0,7	0,6	0,5	254L x 229W x 406H	18,6
PE30 Series with 7,6 l res.	700	87/82	7	4,8	3,2	0,7	0,6	0,5	343L x 241W x 419H	22,2

Power Team®

CE

PE302

700 bar

LR19814

PE302S

For use with Usable			Order	Valve	Valve	Valve	Control	Reservoir Motor
Single-act.	Base model 0,75 KW pump with 4,7 l Reservoir & 2 position valve.	**PE302-220∞**	3-Way, 2 Pos.	9584	Advance Return	On/Off/ Pulse Switch	0,75 KW 220/230 VAC, 50 Hz, Single Phase	4,5**
Single-act.	PE302-220, except has 6,6 l reservoir.	**PE302-2-220**	3-Way, 2 Pos.	9584	Advance Return	On/Off/ Pulse Switch	0,75 KW 220/230 VAC, 50 Hz, Single Phase	6,1***
Single-act.	PE302-220, except has remote motor control.	**PE302R-220**	3-Way, 2 Pos.	9584	Advance Return	Remote Motor Control (3,1 m)	0,75 KW 220/230 VAC, 50 Hz, Single Phase	4,5**
Single-act.	PE302R-220, except has 6,6 l reservoir.	**PE302R-2-220**	3-Way, 2 Pos.	9584	Advance Return	Remote Motor Control (3,1 m)	0,75 KW 220/230 VAC, 50 Hz, Single Phase	6,1***
Single-act.	PE302R-220, except also has solenoid operated remote valve.	**PE302S-220†**	3-Way, 2 Pos.	9570	Advance Return	Remote Motor Control (3,1 m)	0,75 KW 220/230 VAC, 50 Hz, Single Phase	4,5**
Single-act.	PE302S-220, except has 6,6 l reservoir.	**PE302S-2-220†**	3-Way, 2 Pos.	9570	Advance Return	Remote Motor Control (3,1 m)	0,75 KW 220/230 VAC, 50 Hz, Single Phase	6,1***
Single-act.	PE302-220, except has "Auto Dump" valve	**PE302A-220**	Auto Dump	9610	Automatic Pilot Operation	Remote Motor Control (3,1 m)	0,75 KW 220/230 VAC, 50 Hz, Single Phase	4,5**
Single-act.	Base model 0,75 KW pump with 4,7 l Reservoir & 3 position valve.	**PE303-220**	3-Way, 3 Pos.	9520*	Advance Hold Return	On/Off/ Pulse Switch	0,75 KW 220/230 VAC, 50 Hz, Single Phase	4,5**
Single-act.	PE303-220, except has 6,6 l reservoir.	**PE303-2-220**	3-Way, 3 Pos.	9520*	Advance Hold Return	On/Off/ Pulse Switch	0,75 KW 220/230 VAC, 50 Hz, Single Phase	6,1***
Single-act.	PE303-220, except has remote motor control.	**PE303R-220**	3-Way, 3 Pos.	9520*	Advance Hold Return	Remote Motor Control (3,1 m)	0,75 KW 220/230 VAC, 50 Hz, Single Phase	4,5**
Single-act.	PE303R, except has 6,6 l reservoir.	**PE303R-2-220**	3-Way, 3 Pos.	9520*	Advance Hold Return	Remote Motor Control (3,1 m)	0,75 KW 220/230 VAC, 50 Hz, Single Phase	6,1***
Double-act.	Base model 0,75 KW pump with 4,7 l Reservoir & 4-way valve for double-acting systems	**PE304-220**	4-Way, 3 Pos. Tandem Ctr.	9506*	Advance Hold Return	On/Off/ Pulse Switch	0,75 KW 220/230 VAC, 50 Hz, Single Phase	4,5**
Double-act.	PE304-220, except has 6,6 l reservoir.	**PE304-2-220**	4-Way, 3 Pos. Tandem Ctr.	9506*	Advance Hold Return	On/Off/ Pulse Switch	0,75 KW 220/230 VAC, 50 Hz, Single Phase	6,1***
Double-act.	PE304-220, except has remote motor control.	**PE304R-220**	4-Way, 3 Pos. Tandem Ctr.	9506*	Advance Hold Return	Remote Motor Control (3,1 m)	0,75 KW 220/230 VAC, 50 Hz, Single Phase	4,5**
Double-act.	PE304R-220, except has 6,6 l reservoir.	**PE304R-2-220**	4-Way, 3 Pos. Tandem Ctr.	9506*	Advance Hold Return	Remote Motor Control (3,1 m)	0,75 KW 220/230 VAC, 50 Hz, Single Phase	6,1***

* "Posi-Check®" valve design, "Posi-Check®" guards against pressure loss when valve is shifted from "advance" to "hold" position.
** Shipped with 3,8 l of oil (3,4 l usable).
*** Shipped with 7,6 l of oil.
∞ Not to be used for lifting. Best suited for crimping, pressing & punching applications.

CYLINDER/PUMP MATCHING Page 6
CYLINDERS Page 12
PUMP/CYLINDER SETS Page 61
PUMP ACCESSORIES Page 116
HYDRAULIC ACCESSORIES Page 120

PUMPS

Electric Pump
HYDRAULIC PE46 SERIES

0,6 l/min
Two-speed

Best suited for under the roof maintenance and production applications.

PUMPS

- Two-speed high performance pump.
- For use with single- or double-acting cylinders at operating pressures to 700 bar.
- Equipped with a 1.12 KW, 2.875 rpm single-phase, 50 Hz thermal protected induction motor that starts under full load. Noise level of 77-81 dBA.
- All equipped with a 3,1 m remote control except PE462S which has a 7,6 m remote control.
- 24 volt control circuit on all units with remote control.
- CSA rated for intermittent duty.

PE462A

700 bar

LR19814





Pump No.	Max. Pressure Output bar	rpm	Noise level at Idle and 700 bar (dBA)	Amp Draw 220 V - at 700 bar (A)	Oil Del. (l/min. at..)† 0 bar	7 bar	350 bar	700 bar	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Prod. Wt. w/Oil (kg)
PE46-Series	700	2.875	77/81	13	6,7	6,0	0,7	0,6	499	173	292	254	378	241	203	35,8
PE46-E220	700	2.875	77/81*	13	6,7	6,0	0,7	0,6	499	173	292	254	378	241	203	41,3

* Measured at 0,9 m distance, all sides.
† Typical delivery. Actual flow will vary with field conditions.

PE462S

PE464

PUMPS

For use with cyl.-type	Description	Order No.	Valve Type	Valve No.	Valve Function	Control Switch†††	Motor	Reservoir Usable*** (l)
Single-acting	Base model 1,12 KW pump with 9,5 l metal reservoir.	**PE462-50-220**	3-Way	**9584**	Advance Return†	Remote Motor Control (3,1 m) on/off	1,12 KW, 220 VAC* 50 Hz, Single Phase	9,4
Single-acting	PE462-50- 220, except has solenoid valve.	**PE462S-50-220**	3-Way	**9570**	Advance Return**	Remote Motor alve (7,6 m)	1,12 KW, 220 VAC* 50 Hz, Single Phase	9,4
Single-acting	PE462-50-220, except has "dump valve"	**PE462A-50-220∞**	Auto/Dump 3-Way	**9610**	Advance Return	Remote Motor Control (3,1 m) on/off	1,12 KW, 220 VAC* 50 Hz, Single Phase	9,4
Single-acting	1,12 KW pump with 9,5l metal reservoir. **Meets CE requirement**	**PE462-E220**	3-Way	**9584**	Advance Return +	Remote Motor Control (3,1 m) on/off	1,12 KW, 220 VAC* 50 Hz, Single Phase	9,4
Single-acting	PE462-50-220, except has solenoid valve. **Meets CE requirement**	**PE462S-E220**	3-Way	**9570**	Advance Return**	Remote Motor/ Valve (7,6 m)	1,12 KW, 220 VAC* 50 Hz, Single Phase	9,4
Single-acting	PE462-50-220, Except has "dump valve". **Meets CE requirement**	**PE462A-E220∞**	Auto/Dump 3-Way	**9610**	Advance Return	Remote Motor Control (3,1 m) on/off	1,12 KW, 220 VAC* 50 Hz, Single Phase	9,4
Double-acting/ multi-single-act.	PE462-50-220, except has 9500 double-acting valve.	**PE464-50-220**	4-Way	**9500**	Advance Hold Return†	Remote Motor Control (3,1 m) on/off	1,12 KW, 220 VAC* 50 Hz, Single Phase	9,4
Double-acting/ multi-single-act.	Same as PE464-50-220 **Meets CE requirement**	**PE464-E220**	4-Way	**9500**	Advance Hold Return +	Remote Motor Control (3,1 m) on/off	1,12 KW, 220 VAC* 50 Hz, Single Phase	9,4
Double-acting/ multi-single-act.	Same as PE464S-50-220 **Meets CE requirement**	**PE464S-E220**	3/4-Way	**9552**	Advance Return**	Remote Motor/ Valve (3,1m)	1,12 KW, 220 VAC* 50 Hz, Single Phase	9,4
Double-acting/ multi-single-act.	PE462S-50-220, except has 9592 double-acting valve.	**PE464S-50-220**	3/4-Way	**9552**	Advance Return**	Remote Motor/ Valve (3,1m)	1,12 KW, 220 VAC* 50 Hz, Single Phase	9,4

* Available with 115 V., 60 Hz motor (to order, remove suffix "50-220" behind pump order number). Specify voltage when ordering.
** "Advance" position holds pressure with motor shut off.
*** Usable oil is calculated with the oil fill at the recommended level of 13 mm below reservoir cover plate.
† "Advance" position holds pressure with motor shut off. "Return" position returns cylinder.
††† The remote motor control switch on PE46 series pumps is 24 volt.
∞ Not to be used for lifting. When pump is shut off, oil returns to reservoir.

CYLINDER/PUMP MATCHING Page 6
CYLINDERS Page 12
PUMP/CYLINDER SETS Page 61
PUMP ACCESSORIES Page 116
HYDRAULIC ACCESSORIES Page 120

Electric Pump

HYDRAULIC PE55 VANGUARD®

0,9 l/min

For cylinders up to 200 tons.

Heavy duty multiple-applications pump. Heavy construction and concrete stressing. Low voltage starting possible.

PUMPS

- 0,48Kw, 12,000 rpm, 220 volt, 50 Hz universal motor; draws 25 amps at full load, starts at reduced voltage. CSA rated for intermittent duty.
- 3,1 m remote motor control (except PE552S which has a 7,6 m remote motor and valve control).
- True unloading valve achieves greater pump efficiency, allowing higher flows at maximum pressure.
- Reservoirs available in sizes up to 38 l. See accessories page 119.
- Light weight and portable. Best weight to performance ratio of all Power Team pumps.
- "Assemble to Order" System: There are times when a custom pump is required. Power Team's "Assemble to Order" system allows you to choose from a wide range of pre-engineered, off-the-shelf components to build a customized pump to fit specific requirements. By selecting standard components you get a "customized" pump without "customized" prices.
  All pumps come fully assembled, less oil and ready for work.
  See pages 112-115.

PE55TWP Torque Wrench Applications See page 172

PE554W The new pump; weather-resistant.



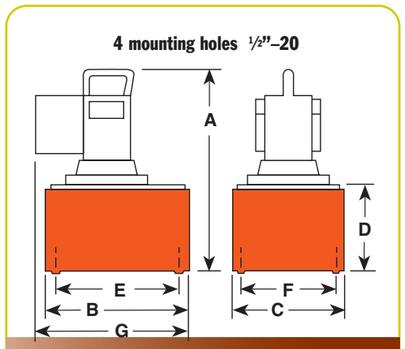

Pump No.	Max. Pressure Output bar	rpm	Noise level Idle and at 700 bar (dBA)	Amp Draw at 700 bar (220 V.)** (A)	Oil Del. (l/min at..) 0 bar	50 bar	350 bar	700 bar	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	w/Oil (kg)
PE55-Series PE55-E220	700	12,000	90/89*	13	11,3	7,1	1,2	0,9	464 520	292	241	178	254	203	356 391	29,4

*Noise level reading (dBA) measured at a 0,9 m distance, all sides.

** Amp draw at 700 bar, 230 Volts 60 Hz is 15 Amps.

PE554S

LR19814

700 bar

PE554PT

PE552

For use with cyl.-type	Description	Order No.***	Reservoir Valve Type	Valve No.	Valve Function	Control Switch ††	Motor	Usable (l)
Single-acting	Base model 0,84 KW pump with 9,5 l reservoir, remote motor control & 3-way valve.	**PE552-50-220**	3-Way	9582	Advance Return**	Remote Motor	0,84 KW*, 220 VAC 50Hz, Single Phase	8,4
Single-acting	PE552-50-220, except also has solenoid operated remote valve.	**PE552S-50-220**	3-Way	9570	Advance Hold Return	Remote Motor & Valve	0,84 KW*, 220 VAC 50Hz, Single Phase	8,4
Single-acting	PE552-50-220, except has "Auto Dump" valve.	**PE552A-50-220**	Auto/Dump	9610	Advance Return	Remote Motor	0,84 KW*, 220 VAC 50Hz, Single Phase	8,4
Single-acting	0,84 KW pump with 9,5 l reservoir. Valve has "Posi-check" feature.	**PE553-50-220**	3-Way†	9520	Advance Hold Return	Remote Motor	0,84 KW*, 220 VAC 50Hz, Single Phase	8,4
Single-acting	Same as PE552-50-220, but meets also CE requirement	**PE552-E220**	3-Way	9584	Advance Return**	Remote Motor	0,84 KW*, 220 VAC 50Hz, Single Phase	8,4
Single-acting	Same as PE552S-50-220, but meets also CE requirement	**PE552S-E220**	3-Way	9570	Advance Return	Remote Motor & Valve	0,84 KW*, 220 VAC 50Hz, Single Phase	8,4
Single-acting	Same as PE552A-50-220, but meets also CE requirements	**PE552A-E220∞**	Auto/Dump	9610	Advance Hold Return	Remote Motor	0,84 KW*, 220 VAC 50Hz, Single Phase	8,4
Single-acting	Same as PE553-50-220 but needs also CE Requirement	**PE553-E220**	3-Way	9520	Advance Hold Return	Remote Moter	0,84 KW*, 220 VAC 50Hz, Single Phase	8,4
Double-acting	Base model 0,84 KW pump with 9,5 l res. and 4-way valve for double-acting systems.	**PE554-50-220**	4-Way†	9506	Advance Hold Return	Remote Motor	0,84 KW*, 220 VAC 50Hz, Single Phase	8,4
Double-acting	Same as PE554-50-220 but needs also CE Requirement	**PE554-E220**	4-Way†	9506	Advance Hold Return	Remote Moter	0,84 KW*, 220 VAC 50Hz, Single Phase	8,4
Double-acting	PE554-50-220, except has 9500 tandem center valve.	**PE554T-50-220**	4-Way	9500	Advance Hold Return	Remote Motor	0,84 KW*, 220 VAC 50Hz, Single Phase	8,4
Double-acting	For use with single-acting Spring Seat, Stressing Jack or double-acting cylinder.	**PE554P-50-220**	4-Way	9500	Advance Hold Return	Remote Motor	0,84 KW*, 220 VAC 50Hz, Single Phase	8,4
Double-acting	For use with single- or double-acting Power Seat, Stressing Jacks ONLY.	**PE554PT-50-220**	4-Way	9628	Advance Hold Sequenced Return	Remote Motor	0,84 KW*, 220 VAC 50Hz, Single Phase	8,4
Double-acting	Pump suitable to run multiple . spring return tools	**PE554C-50-220**	4-Way	9511†††	Advance Hold Return	Remote Motor	0,84 KW*, 220 VAC 50Hz, Single Phase	8,4
Double-acting	Pump equipped with 3/4-way solenoid valve.	**PE554S-50-220**	3/4-Way	9552	Advance Hold Return	Remote Motor & Valve	0,84 KW*, 220 VAC 50Hz, Single Phase	8,4
Double-acting	Pump suitable to run multiple Spring return cylinder	**PE554C-E220**	4-Way	9511 +++	Advance Hold Return	Remote Motor	0,84 KW*, 220 VAC 50Hz, Single Phase	8,4
Double-acting	Pump equipped with 3/4 -way solenoid valve	**PE554S-E220**	3/4-Way	9552	Advance Hold Return	Remote Motor & Valve	0,84 KW*, 220 VAC 50Hz, Single Phase	8,4

* Pumps available with 115 volt, 50 Hz motors. (to order remove the –50-220 suffix from the order code). See "Assemble to Order" pump options on pages 102-105.

** Holds with motor shut off.

*** To order PE55 series pumps with CSA approval, add "–C" to the Order No.

† Valves have "Posi-Check®" feature.

††† Valving allows alternate and independent operation of two different spring return tools. Valve holds pressure only while valve is in "A" or "B" port position with pump motor shut off.

∞ Not to be used for lifting.

Also available in E 110 CE

CYLINDER/PUMP MATCHING Page 6
CYLINDERS Page 12
PUMP/CYLINDER SETS Page 61
PUMP ACCESSORIES Page 116
HYDRAULIC ACCESSORIES Page 120

PUMPS

Electric Pump
HYDRAULIC PE60 SERIES

Post Tensioning
0,9 l/min
Two-Speed

Compact, light weight pump. Excellent choice for rugged applications and low voltage starting.

PUMPS

- Long, trouble free life in the most demanding work environments. For operating single- or double-acting cylinders, or stressing jacks.
- Powered by 0,84 KW, 220 volt, 60/50 Hz single phase motor. Starts under load, even at the reduced voltages at construction sites.
- Optional fan-driven external oil cooler includes rollover guard.
- Insulated carrying handle.
- Integral 102 mm fluid-filled pressure gauge with steel bezel complies with ASME B40.1 Grade A. With 0 to 700 bar pressure range in 7 bar increments.
- Sealed 4,34 l (usable) reservoir. Reservoir drain port is standard.
- Standard oil level sight gauge for accurate oil level monitoring.

PE604T w/cooler

- External spin-on filter removes contaminants from circulating oil to maximize pump, valve and cylinder/tool life.

PE604T

700 bar

LR19814



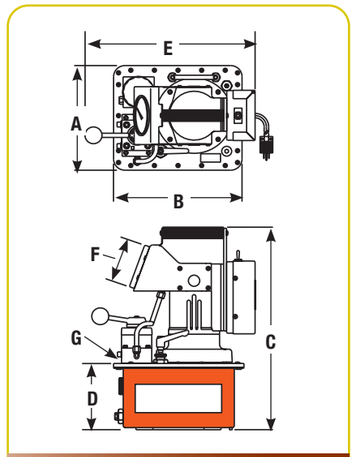

Pump No.	Max. Pressure Output bar	rpm	Noise level Idle and 700 bar (dBA)	Amp Draw at 700 bar (A)	Oil Del. (l/min at..) 0 bar	50 (50)	350 bar	700 bar	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (in)	Prod. Wt. w/Oil (kg)
PE604T -220	700	12.000	80/85	13	11,3	7,1	1,2	0,9	263,5	301,6	457,2	152,4	381	101,6	3/8 NPTF	27,2
PE604PT -220	700	12.000	80/85	13	11,3	7,1	1,2	0,9	263,5	301,6	457,2	152,4	381	101,6	3/8 NPTF	27,7

NOTE: Unloading pressure is 70 bar.
Consult factory for PE60 pump models with other control and valve options.

The PE60 used for pre-stressing.

	Description	Order No.	Valve Type	Valve No.	Valve Function	Control Switch	Motor	Reservoir Usable (l)
Single-Acting, Spring Seat, Stressing Jack or Double-Acting	0,84 kW pump with 4,73 l reservoir & valve for double-acting systems.	**PE604T**	4-Way 3-position	9500	Advance Hold Return	On/Off/Pulse	0,84 kW, 220 VAC 50 Hz, Single Phase	4,34
Single-Acting or Double-Acting Power Seat, Stressing Jacks Only	PE604T, except has special valve for post tensioning application only.	**PE604PT**	4-Way 3-position	9628 Model C	Advance Hold Sequenced Return	On/Off/Pulse	0,84 kW, 220 VAC 50 Hz, Single Phase	4,34

OPTIONAL

252511: Oil cooler kit for PE604T or PE604PT, 115 VAC. Weight 2,7 kg.

252512: Oil cooler kit for PE604T or PE604PT, 220 VAC. Weight 2,7 kg.

CYLINDER/PUMP MATCHING Page 6
CYLINDERS Page 12
PUMP/CYLINDER SETS Page 61
PUMP ACCESSORIES Page 116
HYDRAULIC ACCESSORIES Page 120

Electric Pump
HYDRAULIC PQ60 SERIES

Up to 200 ton
0,8 l/min

Pump designed specifically for heavy duty, extended cycle operation.

PUMPS

- For operating single- or double-acting cylinders.
- Metal shroud keeps dirt and moisture out of motor and electrical components.
- Electrical shut-down feature prevents unintentional restarting of motor following an electrical service interruption.
- Internal relief valve limits pressure to 700 bar. External relief valve is adjustable from 70 to 700 bar.
- Pumps operate below maximum OSHA noise limitation (74-76 dBA).
- Start and operate under full load, even with voltage reduced 10%.

PQ603

700 bar

LR19814



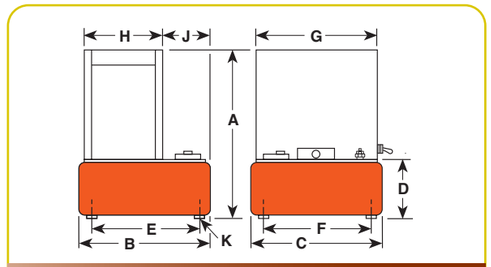

Prod. Wt. Pump	Max. Pressure Output		Noise level at Idle and 700 bar	Amp Draw at 700 bar	Oil Del. (l/min at..) 7	70	350	700	A	B	C	D	E	F	G	H	J	K***	w/Oil
PQ60 Series	700	1.437	74/76*	See Chart (following page)	9,7	0,9	0,9	0,8	638	362	394	184	308	338	373	237	122,2	½–20 UNF	76,6**

* Measured at a 0,9 m distance, all sides.
** Total weight with oil and 3-way solenoid valve. Subtract 4,5 kg to obtain weight of pump with manual valve.
*** For 50,8 mm dia. swivel casters, order (4) No. 10494.

PQ604

PQ604S

Hydraulic Machine Press Operation.

For use with Cyl. Type	Description	Order No.	Valve Type	Valve No.	Valve Function	Max. Amp Draw at 700 bar (A)	Motor	Reservoir Usable (l)
Single-Acting	1,49 KW pump with 21,6 l reservoir and manual valve,	**PQ603-50-220**	3-Way	9520*	Advance Hold Return	115V - 22 amps 230V - 11 amps	1,49 KW, 220 Volt 50 Hz, Single	20
Single-Acting	PQ603-50-220, except has solenoid operated remote valve.	**PQ603S-50-220**	3-Way	9599†	Advance Hold Return	115V - 22 amps 230V - 11 amps	1,49 KW, 220 Volt 50 Hz, Single	20
Double-Acting	1,49 KW pump with 21,6 l reservoir and manual valve.	**PQ604-50-220**	4-Way	9506*	Advance Hold Return	115V - 22 amps 230V - 11 amps	1,49 KW, 220 Volt 50 Hz, Single	20
Double-Acting	PQ604-50-220, except has solenoid operated remote valve.	**PQ604S-50-220**	4-Way	9512†	Advance Hold Return	115V - 22 amps 230V - 11 amps	1,49 KW, 220 Volt 50 Hz, Single	20

* Manual valve. Pump is equipped with RUN/OFF/PULSE switch for control of motor.
† Solenoid valve. Pump is equipped with a remote control switch with 3,1 m cord.
‡ Some Power Team pumps are available in special configurations not listed in this catalog. Power Team can "Assemble to Order" pumps with special seals, voltages, valves, relief valve settings, etc. For your special requirements please consult your local distributor or the Power Team factory.

CYLINDER/PUMP MATCHING Page 6
CYLINDERS Page 12
PUMP/CYLINDER SETS Page 61
PUMP ACCESSORIES Page 116
HYDRAULIC ACCESSORIES Page 120

Electric Pump
HYDRAULIC PQ120 SERIES

Up to 400 Ton
1,6 l/min

Low speed, high torque pump designed specifically for heavy duty, extended cycle operation. Ideal for press operation.

PUMPS

- Start and operate under full load, even with voltage reduced 10%.
- Electrical shut-down feature prevents unintentional restarting of motor following an electrical service interruption.
- Internal relief valve limits pressure to 700 bar. External relief valve is adjustable from 70 to 700 bar.
- Pump prewired at factory with a 2,24 KW, 380 volt, 50 Hz. 3 Phase motor. Other electrical configurations are available. See ordering information on the following page.
- 24 volt control circuits on units with remote controls for added user/operator safety.
- 2,24 KW(3 phase) motor with thermal overload protection. Motor starter and heater element supplied as standard equipment; no hidden charges!
- Metal shroud keeps dirt and moisture out of motor and electrical components.
- Pumps operate below maximum OSHA noise limitation.

PQ1203

PQ1204

PQ1204S

700 bar

LR19814



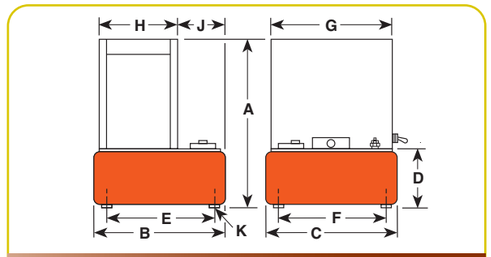

Pump No.	Max. Pressure Output bar	rpm	Noise level at Idle and 700 bar (dBA)	Amp Draw at 700 bar (A)	Oil Del. (l/min at..) 7 bar	70 bar	350 bar	700 bar	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	J (mm)	K*** (in)	Prod. Wt. w/Oil (kg)
PQ120-Series	700	1.437	73/78*	See Chart Above	9,7	2,1	1,7	1,6	638	362	394	184	308	338	373	237	122,2	½-20 UNF	74,3**

* Measured at a 0,9 m distance, all sides.
** Total weight with oil and 3-way solenoid valve. Subtract 4,5 kg to obtain weight of pump with manual valve.
*** For 50,8 mm dia. swivel casters, order (4) No. 10494.

For use with cyl.-type	Description	Order No.	Valve Type	Valve No.	Valve Function	Motor	Reservoir Usable (l)
Single-acting	2,24 KW pump with 21,6 l reservoir and manual valve.	**PQ1203-E380**	3-Way	9520*	Advance Hold Return	2,24 KW, 400 Volt 50 Hz, 3 Phase	20
Single-acting	PQ1203-50-380, except has solenoid operated remote valve.	**PQ1203S-E380**	3-Way	9599†	Advance Hold Return	2,24 KW, 400 Volt 50 Hz, 3 Phase	20
Double-acting	2,24 KW pump with 21,6 l reservoir and manual valve.	**PQ1204-E380**	4-Way	9506*	Advance Hold Return	2,24 KW, 400 Volt 50 Hz, 3 Phase	20
Double-acting	PQ1204-50-380, except has solenoid operated remote valve.	**PQ1204S-E380**	4-Way	9512†	Advance Hold Return	2,24 KW, 400 Volt 50 Hz, 3 Phase	20

* Manual valve. Pump is equipped with RUN/OFF/PULSE switch for control of motor.
† Solenoid valve. Pump is equipped with a remote control switch with 3,1 m cord.
‡ Some Power Team pumps are available in special configurations not listed in this catalog. Power Team can "Assemble to Order" pumps with special seals, voltages, valves, relief valve settings, etc. For your special requirements please consult your local distributor or the Power Team factory.

CYLINDER/PUMP MATCHING Page 6
CYLINDERS Page 12
PUMP/CYLINDER SETS Page 61
PUMP ACCESSORIES Page 116
HYDRAULIC ACCESSORIES Page 120

Electric Pump
HYDRAULIC PE400 SERIES

Up to 1,000 Ton
5,6 l/min

High tonnage double-acting cylinders, Single or multiple cylinder applications. Up to 1,000 Tons

PUMPS

- Two-speed high output pump delivers up to 16 l/min of oil.
- Low noise level of 73-80 dBA.
- Integral electrical shut-down feature prevents unintentional restarting of motor following an electrical service interruption. Over-current protection prevents damage to motor as a result of overheating.
- "Stop" and "Start" control buttons are 24 volt. PE4004 has a 4-way/3-position manual valve. The PE4004S has a 4-way/3-position solenoid valve with a 24 volt remote hand switch.
- External pressure relief valve is adjustable from 100 to 700 bar.
- Heavy duty 50,8 mm dia. casters assure easy maneuvering.
- 75,7 l (62,8 l usable) reservoir has a low oil level sight gauge.
- Powered by a dual voltage 7,46 KW, 3 phase, 1,437 rpm motor.
- 3 phase motor has all the electrical components necessary to operate the pump.The customer has no hidden charges when making purchase.
- Deliver 16 l/min. of oil at 15 bar, 5,6 l/min. of oil at 700 bar.



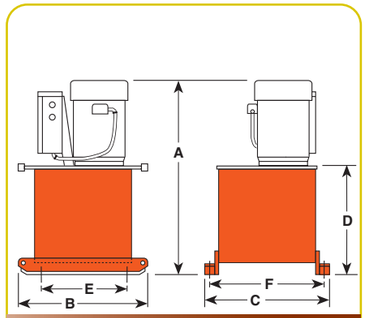

Pump No.	Max. Pressure Output bar	rpm	Noise level at Idle and 700 bar (dBA)	Amp Draw at 700 bar (A)	Oil Del. (l/min at..) 15 bar	90 bar	350 bar	700 bar	A* (mm)	B (mm)	C (mm)	D (mm)	E Caster Mfg. (mm)	F Caster Mfg. (mm)	Prod. Wt. w/Oil (kg)
PE4004-E380	700	1.437	73/80	6	16	14	6	5,6	924	635	610	540	394	546	223
PE4004S-E380	700	1.437	73/80	6	16	14	6	5,6	924	635	610	540	394	546	229

* Add 127 mm and 3,6 kg when casters are mounted. (Units are supplied with four 102 mm dia. swivel casters.)

PE4004S pump and RD3006 cylinder used in a special press which repairs damaged chain links for the shipping industry.

CE

PE4004S

700 bar

For use with cyl.-type	Description	Order No.	Valve Type	Valve No.	Valve Function	Motor††	Reservoir Usable (l)
Double-acting	7,46 KW pump with 75,5 l reservoir and manual valve.	**PE4004-E380**	4-Way	9506	Advance Hold Return	7,46 KW, 400 volt 50 Hz, 3 Phase	62,8†
Double-acting	PE4004, except has solenoid operated remote valve.	**PE4004S-E380**	4-Way	9512**	Advance Hold Return	7,46 KW, 400 volt 50 Hz, 3 Phase	62,8†

** Solenoid valve with remote control.

† Usable oil is calculated with oil fill at recommended level at 57 mm below cover plate.

†† PE400 series available in 220/380V, 50Hz and 460V, 50Hz. Please specify when ordering. Example: PE4004-50-380 or for 460 V PE4004-460.

NOTE: Valves for spring return cylinders are available upon request. Consult the factory.

CYLINDER/PUMP MATCHING Page 6
CYLINDERS Page 12
PUMP/CYLINDER SETS Page 61
PUMP ACCESSORIES Page 116
HYDRAULIC ACCESSORIES Page 120

PUMPS

Crimping Pump
ELECTRIC HYDRAULIC PE-NUT

0,49 l/min
Two-Speed

Extremely durable yet lightweight and operate under low-line voltage conditions.

PUMPS

PE-NUT PUMP – 115V

- 0,46 KW universal electric motor (50 cycle)
- Two-stage pump for rapid ram advance
- Operational under low-line voltage conditions
- Optional operating pressures available; consult Power Team for details
- Designed for use with spring-returned remote tools
- High-pressure safety relief valve
- Remote hand control with 3,1 m cord
- Carrying handle
- Factory filled oil reservoir
- Pressure matched quick-coupler supplied
- Optional carrying case
- Two-stage pumping system
- Unique, intermittent duty pump
- Piston-type high-pressure pump supercharged by a low-pressure pump.

CAUTION: DESIGNED FOR CRIMPING APPLICATIONS ONLY! This system should not be used for lifting.

Order No.	Oil Delivery (l/min.)	Oil Reservoir qt. (l)	Usable Oil qt. (l)	Overall Width (mm)	Overall Length (mm)	Overall Depth (mm)	Pump Weight w/Oil (kg)
PE-NUT	2,62 at 7 bar	6	2,8	165	365	210	12,6
PE-NUTC*	0,49 at 700 bar						

*Includes Case

Electrical Data	
Electric Motor	Electrical Control
0,46 KW, 10,000 rpm 115V AC, 50 Hz 11 amp current draw (115V at 700 bar)	Remote control with 10-foot cord

Crimping Pump
GAS HYDRAULIC PG120

Crimping Pump
2,1 l/min
Two-Speed

Two-stage pump for rapid advance

PUMPS

GASOLINE POWER PUMPS

PG1203-CP

- 4,5 Kw Briggs & Stratton engine
- Manual control valve
- High-pressure safety relief valve
- Protective roll cage
- For use with single acting tools

PG1203/4S-CP

- 4,1 Kw Honda OHV-type engine
- Remote hand control with 3,1 m cord
- Two-stage pump for rapid advance
- High-pressure safety relief valve
- Protective roll cage
- For use with either single or double acting tools

CAUTION: DESIGNED FOR CRIMPING APPLICATIONS ONLY! This system should not be used for lifting.

Order No.	Oil Delivery (l/min.)	Oil Reservoir (l)	Usable Oil (l)	Overall Width (mm)	Overall Length (mm)	Overall Height (mm)	Pump Weight w/Oil (kg)
PG1203-CP	8 at 7 bar	11,3	7	502	552	622	25
PG1203/4S-CP	2,1 at 700 bar						

CYLINDER/PUMP MATCHING Page 6 · CYLINDERS Page 12 · PUMP/CYLINDER SETS Page 61 · PUMP ACCESSORIES Page 116 · HYDRAULIC ACCESSORIES Page 120

Gasoline Pump
HYDRAULIC PG30/55 SERIES

0,5 - 0,9 l/min
Gasoline driven

Gasoline power supply ideal for remote locations. PG30 series for to 75 ton cylinders. PG55 series for up to 150 ton cylinders.

- A logical choice at work sites where electricity or compressed air are unavailable. For single- or double-acting cylinders at operating pressures to 700 bar.
- All gasoline engine/hydraulic pumps feature "Posi-Check®" valve to guard against pressure loss when valve is shifted from "advance" to "hold".

PG303

PG303 and PG304
- Powered by a 2-cycle, 1,5 kW Tecumseh engine giving it the lowest weight to horsepower ratio of all gasoline driven pumps. Has an aluminum reservoir with 6 l of usable oil.
- Has same basic pump as PE30 series electric operated pumps.
- PG30 series pumps are equipped with roll cages to protect pump from damage.
- PG30 series pumps weigh in at only 14,5 kg with oil.
- PG303 is for single-acting cylinders, has a 9520 valve with separate internal return line; allows oil from running pump to return to reservoir, independently of cylinder return oil, when valve is in "return" position.
- PG304 is for double-acting cylinders, has a 9506 4-way (tandem center) valve.





PG553 and PG554



Pump No.	Max. Pressure Output bar	rpm	Oil Del. (l/min at...) 7 bar	0 bar	350 bar	700 bar	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Prod. Wt. w/Oil (kg)
PG303, PG304	700	6.000	4,4*	0,6	0,6	0,5	378	264	241	406	130	343	14,5
PG553, PG554	700	3.600	7,7	1,2	1,1	0,9	559	457	318	219	422	229	54,4

* First stage oil delivery from 0-28 bar at 3,7 l/min minimum.

PG553 and PG554
- 4,5 Kw Intek "Diamond Edge" 4-cycle, by Briggs & Stratton 19 l reservoir.
- Same basic pump as PE55 series electrical Vanguard® pumps.
- PG553 has a 9520 3-way valve for single-acting cylinders.
- PG554 has a 9506 4-way valve for double-acting cylinders.

PG554

700 bar

Gasoline Powered Hydraulic Pumps like this PG303 help provide hydraulic force at remote locations.

For use with cyl.-type	Description	Order No.	Valve Type	Valve No.	Valve Function	Reservoir Usable (l)	Kw	Cycle
Single-acting	1,5 Kw pump with 7,6 l reservoir and single-acting valve.	**PG303**	3-Way	9520	Advance Hold Return	6	1,5	2
Single-acting	4,5 Kw pump with 21,6 l Reservoir and single-acting valve.	**PG553**	3-Way	9520	Advance Hold Return	20,8**	4,5	4
Double-acting	PG303, except has double-acting valve.	**PG304**	4-Way	9506	Advance Hold Return	6	1,5	2
Double-acting	PG553, except has double-acting valve.	**PG554**	4-Way	9506	Advance Hold Return	20,8**	4,5	4

** Usable oil is calculated with oil fill at recommended level at 13 mm below cover plate.

CYLINDER/PUMP MATCHING Page 6
CYLINDERS Page 12
PUMP/CYLINDER SETS Page 61
PUMP ACCESSORIES Page 116
HYDRAULIC ACCESSORIES Page 120

Gasoline Pump
PG120-PG400 SERIES

2,1 - 6,4 l/min
Max.output gasoline powered pumps.

Large reservoir capacity roll cage equipped. PG120 for up to 300 ton cylinders. PG400 for up to 1,000 ton cylinders.

PUMPS



700 bar

- Two-speed high performance pumps ideal for construction, structure moving and rigging applications.
- A logical choice at work sites where electricity or compressed air are unavailable. For single- or double-acting cylinders at operating pressures to 700 bar.
- All gasoline engine/hydraulic pumps feature "Posi-Check®" valve to guard against pressure loss when valve is shifted from "advance" to "hold".
- PG1200 Series pumps powered by a Honda 4-cycle, 5.5 hp engine with automatic decompression and electronic ignition. Deliver over 2,1 l/min at 700 bar.
- A 19 liter reservoir means adequate capacity for multi-cylinder applications. Dual element air cleaner protects engine from dusty environments.

PG4004S

- Heavy duty "roll cage" provides pick-up points for lifting. Horizontal bars on PG1203, PG1204 and PG1204S protect unit, provide hand holds for carrying.
- Rubber anti-skid insulation on bottom of reservoir resists skidding and dampens vibration. PG1200M-4 and PG1200M-4D include a pump cart with 305 mm wheels.
- Adjustable external pressure regulator.

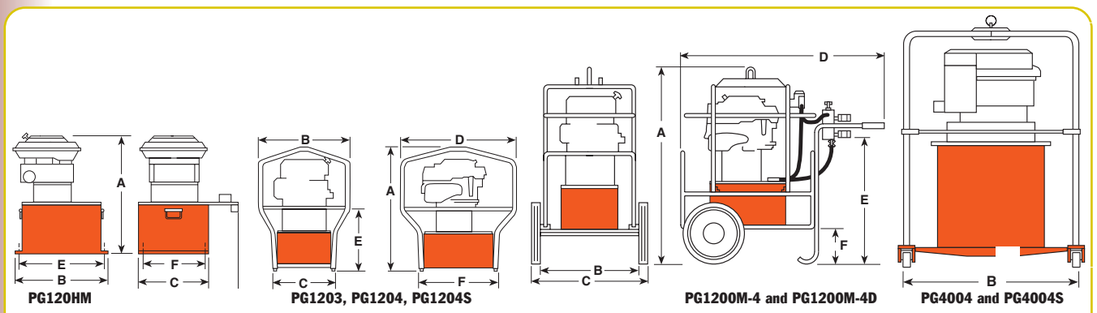

Pump No.	Max. Pressure Output bar	rpm	Oil Del. (l/min @) 7 bar	70 bar	350 bar	700 bar	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Prod. F (mm)	Wt. w/Oil (kg)
PG120HM	700	3,600	7,7	2,8	2,4	2,1	584	394	362	483	338	308	68
PG1203	700	3,600	7,7	2,8	2,4	2,1	708	514	362	667	343	464	70
PG1204	700	3,600	7,7	2,8	2,4	2,1	708	514	362	667	343	464	70
PG1204S	700	3,600	7,7	2,8	2,4	2,1	708	514	362	667	343	464	73
PG1200M-4	700	3,600	7,7	2,8	2,4	2,1	1070	457	635	1080	667	184	118
PG1200M-4D	700	3,600	7,7	2,8	2,4	2,1	1070	457	635	1080	667	184	127
PG4004	700	3,600	19,8	17,9	7,6	6,4	1276	1321	1321	–	–	–	197
PG4004S	700	3,600	19,8	17,9	7,6	6,4	1276	1321	1321	–	–	–	200

PG1204S

PG1200M-4D

PG1200M-4
- For single-acting cylinders. Has 9520 3-way/3-position (tandem center) valve, 9596 load lowering valve and 9644 4-port manifold with individual needle valves at each port.
- Has a 9796 coupler and 9797 dust cap at each port. Valving permits precise individual control of up to four cylinders.
- A 9052 heavy duty, fluid filled pressure gauge (0-700 bar) is included.

PG1200M-4D
- For single- or double-acting cylinders with precise individual control of up to four cylinders possible.
- Equipped same as PG1200M-4, except has 9506 4-way/3-position (tandem center) valve, and second 4-port manifold without needle valves mounted beneath 9644 manifold for operating double-acting cylinders.

PG400 Series Maximum output Hydraulic Power Package
- Ideal for single or multiple cylinder applications. Has a 4-cycle, 15 kW Honda engine and 76 l reservoir (63 l usable) with low oil level sight gauge.
- Steel "roll cage" protects pump, has a lifting hook; 102 mm dia. swivel casters provide mobility.
- Delivers 6,4 l/min of oil at maximum operating pressure.
- Has a 9506 4-way valve. On/off switch and speed control are protected by a panel. Sturdy molded case protects battery (not included).

PUMPS

For use with cyl.-type	Description	Order No.	Valve Type	Valve No.	Valve Function	Reservoir Usable (l)	Reservoir Kw	Reservoir Cycle
Single-acting	Base model 4,1 Kw gasoline pump with 22 l reservoir.	**PG1203**	3-Way	9520	Advance Hold Return	20,8	4,1	4
Single-acting	PG1203 with cart, rollcage, load lowering valve, 4 port manifold & gauge.	**PG1200M-4**	3-Way Manifold	9520 9644	Advance Hold Return**	20,8	4,1	4
Single-acting/ double-acting	PG1200M-4D, except without "Roll Cage" and cart. Ideal for house moving industry.	**PG120HM**	4-Way Manifold	9506 9642	Advance Hold Return**	20,8	4,1	4
Double-acting	Base model 4,1 Kw gasoline pump, with 22 l reservoir and double-acting valve.	**PG1204**	4-Way	9506	Advance Hold Return	20,8	4,1	4
Double-acting	PG1204, except has roll cage, cart, solenoid valve and 7,6 m cord.	**PG1204S**	4-Way Solenoid***	9516	Advance Hold Return	20,8	4,1	4
Double-acting	PG1200M-4, except for double-acting systems.	**PG1200M-4D**	4-Way Manifold	9506 9644	Advance Hold Return**	20,8	4,1	4
Double-acting	Base model 15 Kw pump with 76 l reservoir.	**PG4004**	4-Way	9506	Advance Hold Return	62,8*	15	4
Double-acting	PG4004, except has solenoid operated remote valve.	**PG4004S**	4-Way Solenoid***	9516	Advance Hold Return	62,8*	15	4

* Usable oil is calculated with oil fill at recommended level at 57 mm below cover plate.

** Control up to 4 cylinders independently.

*** Has 7,6 m remote control cord.

CYLINDER/PUMP MATCHING Page 6
CYLINDERS Page 12
PUMP/CYLINDER SETS Page 61
PUMP ACCESSORIES Page 116
HYDRAULIC ACCESSORIES Page 120

Intensifier
HYDRAULIC

Pressure ratio 5:1

Converts low-pressure portable hydraulic pumps or on-board hydraulic systems, into high pressure power sources.

PUMPS

- Applications include utilities, railroads, construction, riggers and others.
- Operates single- or double-acting cylinders, jacks, and tools such as crimpers, spreaders, cable cutters, or tire tools.
- May be used to operate two separate, single-acting tools (with integral valves) independently, without need for additional manifold.
- Compact and rugged for use inside a utility vehicle aerial bucket or stowing in a vehicle.
- Control valve included. Other Power Team valves available as an option to suit your specific application, if needed; consult factory.
- No reservoir level to maintain; uses low pressure system as oil supply.
- Has 3/8" NPTF ports; compatible with standard fittings for low and high pressure systems.

HB443

700 bar

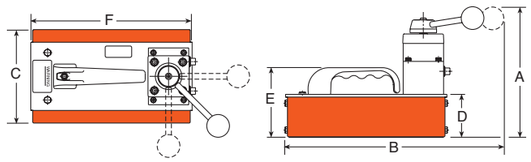

Pump No.	Output Flow at 700 bar	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Prod. Wt. (kg)
HB44-Series	0,7 l/min.	210	368	156	70	114	267	7,2

For use with Cyl. Type	Description	Order No.	Valve Type	Valve No.	Output Flow Valve Function	Input Flow Range (l/min)	Input Flow Pressure (bar)	Output Flow Range (l/min)
Single-Acting	Hydraulic intensifier for single-acting systems	**HB443**	3-Way 3-Position	9520*	Advance Hold Return	0 -38	20 - 138	0 - 9,5
Single-Acting/ Double-Acting	Hydraulic intensifier for double-acting systems	**HB444**	4-Way 3-Position	9506*	Advance Hold Return	0 -38	20 - 138	0 - 9,5
Double-Acting	Hydraulic intensifier for double-acting torque wrench tools	**HB445-RR**	4-Way 3-Position	–	Advance Hold Return	0 -38	20 - 138	0 - 9,5

† For maximum efficiency, recommended input flow is 19 l/min at a maximum pressure of 140 bar. Higher flows and/or pressures must be compensated for at the system pump (e.g., relief valve, variable flow devices, etc.).

* Posi-Check®" valve design, "Posi-Check®" guards against pressure loss when valve is shifted from "advance" position to "hold" position.



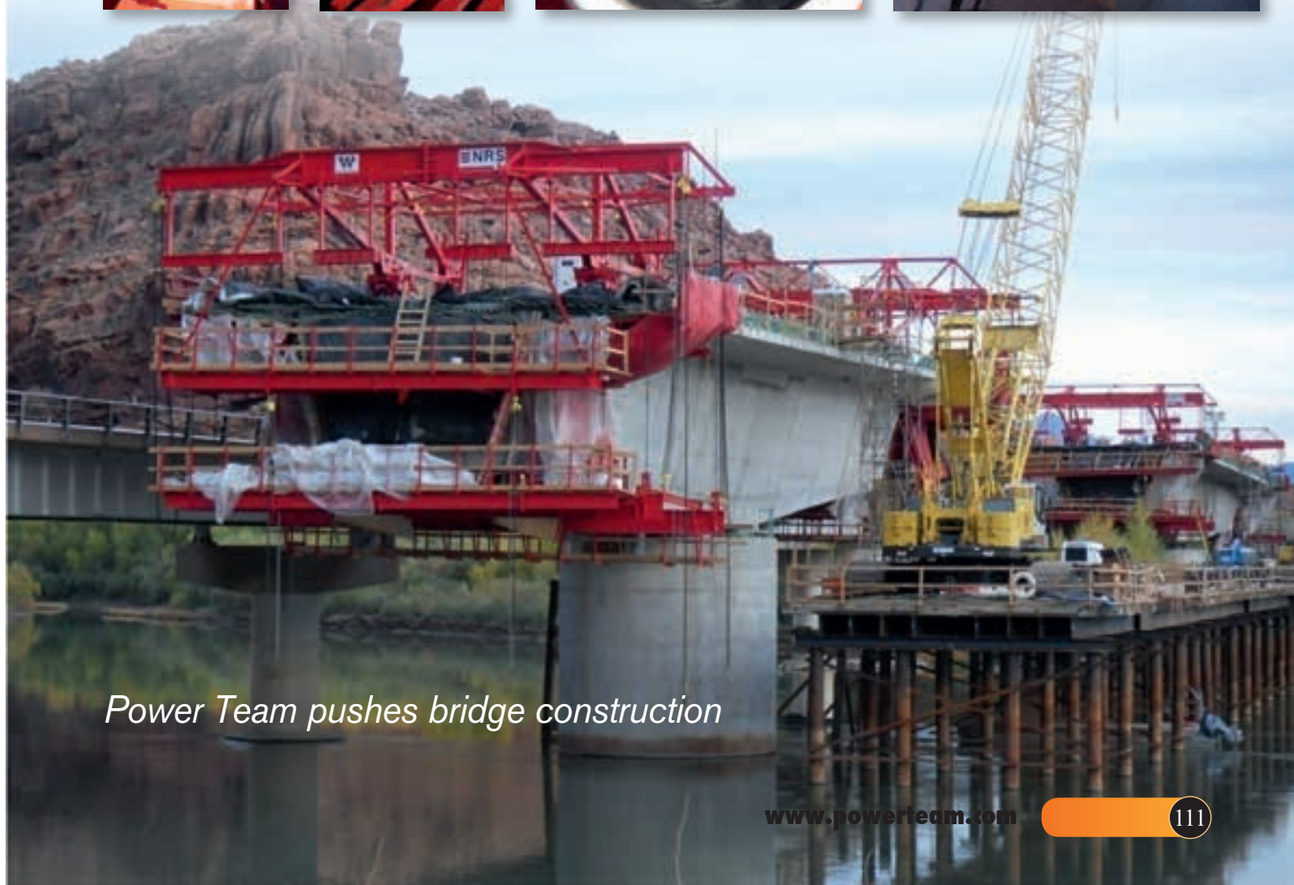

Power Team pushes bridge construction

Assemble to Order Pumps

CUSTOM BUILT HYDRAULIC PUMP

Choose your basic pump, make your selections, and we will assemble, test and ship your pump.

1 PE55A PE55B PE90A PE90B

2 PE55C PE55D PE55F PE90C PE90D PE90F

3 PE120M

4 PA55A PA90A

5 PG55A

700 bar

ORDER A "CUSTOM BUILT" HYDRAULIC PUMP

"Assemble to Order" means you can choose a basic pump with gas, air or electric motor. Then select the proper valve, gauge, pressure control, motor control and reservoir. You get a two-stage pump that gives high oil volume for fast cylinder approach (and return with double-acting cylinders) in the first stage and high pressure in the second stage.

1 0,83 KW UNIVERSAL MOTOR

These motors start under full load and are suitable for operation up to 350 or 700 bar. The motor is 0,83 KW, 12,000 rpm, 115 or 230 volt, 50 cycle A.C. single phase (25 amp draw at 115V.). With proper valve they can be used with single- or double-acting cylinders. Remote control available.

2 1,1 KW JET MOTOR, SINGLE & THREE-PHASE

Feature low noise level, moderate speed for long service and are ideal for fixed applications. Motor is 1,1 KW, 3.450 rpm, 115 or 230 volt, 50 cycle, A.C. single phase with thermal overload switch. Can be used with single- or double-acting cylinders and equipped with remote control. Also available in 230/460 volt, three-phase (specify).

NOTE: These do not start under full load unless valve is in "neutral" (requires open or tandem center valve) and are not recommended for frequent starting and stopping.

3 2,2 KW JET MOTOR, THREE-PHASE

Gives low noise level and long life due to its moderate operating speed. Ideal for fixed installations. Consists of basic 700 bar pump, jet pump motor: 2,2 KW, 3.450 rpm, 230/460 volt, 50 cycle. A.C. three-phase, with thermal overload switch. Equipped with internal and external relief valve. Will start under load.

4 2,3 KW AIR MOTOR

This pump is ideal for use where electricity is unavailable or cannot be used. The 350 or 700 bar pump has a 2,3 KW air driven motor at 3.000 rpm (optimum performance based on 6 bar air pressure and 1165 l/min 1419 l/min at the pump). You can drive single- or double-acting cylinders with the correct valve.

NOTE: 6 bar air supply required to start under full load.

5 GASOLINE ENGINE

This version is perfect when electricity and air are unavailable. It is capable of continuous operation at full pressure. Consists of basic 700 bar pump, 4-cycle Briggs & Stratton "Diamond Edge" gasoline engine, developing 4,5 KW. As with all these pumps, this unit can be valved for use with either single- or double-acting cylinders.

1



dBA @ idle and 700 bar- 90/95
dBA @ idle and 350 bar - 90/95

2



dBA @ idle and 700 bar - 80/85

3



dBA @ idle and 700 bar - 80/85

4



dBA @ idle and 700 bar - 83/88
dBA @ idle and 350 bar - 83/88

5



"ASSEMBLE TO ORDER" SYSTEM
HOW TO ORDER YOUR "CUSTOM" HYDRAULIC PUMP. . .

You can choose from pre-engineered, off-the-shelf components to customize your pump. All the components are listed in table form, with key letters or numbers on pages 114-115. Complete instructions guide you through so you can determine what is needed to complete a pump assembly. Shown below is an example of a custom-built pump.

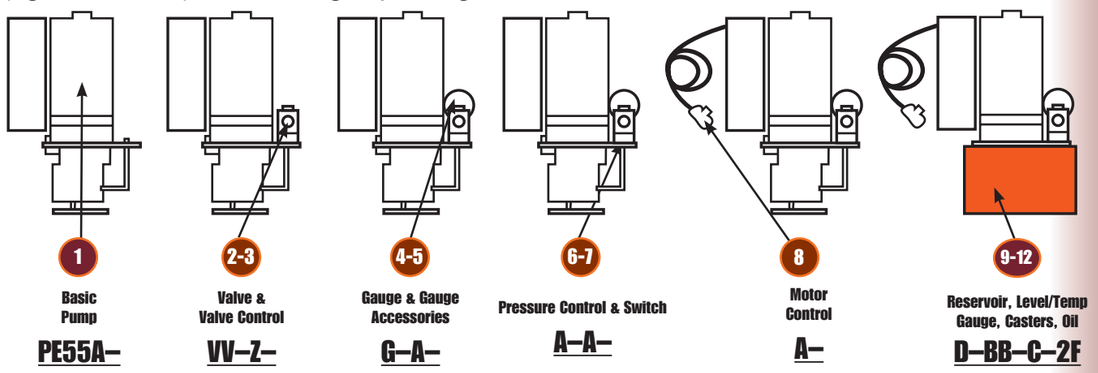

Pump No. PE55A–VV–Z–G–A–A–A–A–D–BB–C–2F is a 700 bar two-speed pump with a 115 volt, 50Hz, single phase, 1,12 KW, 12,000 rpm motor;
a 9512
4-way solenoid valve with a 202778 remote hand control, a 9041 pressure gauge, no gauge accessories, standard pressure control, standard On-Off-Pulse motor control, 40063OR9 7,6 liter reservoir, a 350431 oil level/temperature gauge, 10494 casters, and 7,6 liter of standard hydraulic oil.

See next two pages for pump components

CYLINDER/PUMP MATCHING Page 6 | CYLINDERS Page 12 | PUMP/CYLINDER SETS Page 61 | PUMP ACCESSORIES Page 116 | HYDRAULIC ACCESSORIES Page 120

Assemble to Order System

PUMP COMPONENT SPECIFICATION CHART

TO BUILD YOUR PUMP, FILL IN KEY LETTERS FROM CHARTS

1 Basic Pump	2 Select Valve	3 Select Valve Control	4 Select Gauge	5 Select Gauge Accessories	6 Pressure Control
7 Pressure Switch	**8 Motor Control**	**9 Reservoir**	**10 Level/Temp Gauge**	**11 Choose Casters**	**12 Select Oil**

Use the charts numbered from 1-12 below to select the pump, valve, gauge and other miscellaneous accessories to suit your needs. For the pump, fill in the basic number plus key letter in block 1 above and the key letter only in the blocks 2-12 above for any of the other items. Refer to the appropriate pages in this catalog for more specific information on the products you need.

1 BASIC PUMP (See pages 94-106)

BASIC PUMP NUMBERS						SPECIFICATIONS		
						NOTE: Customer must specify voltage required.		
PE55 (700 bar)	PE90 (350 bar)	PE120 (700 bar)	PA55 (700 bar)	PA90 (350 bar)	PG55 (700 bar)	Power Source	rpm	KW
A or AC*	A or AC*					115V-60 Hz, 1Ø	12,000	0,84
						110V-50 Hz, 1Ø	12,000	0,84
B or BC*	B or BC*					230V-60 Hz, 1Ø	12,000	0,84
						220V-50 Hz, 1Ø	12,000	0,84
† C or CC*	† C or CC*					115V-60 Hz, 1Ø	3,450	1,12
† C50	† C50					110V-50 Hz, 1Ø	2,850	1,12
† D or DC*	† D or DC*					230V-60 Hz, 1Ø	3,450	1,12
† D50	† D50					220V-50 Hz, 1Ø	2,850	1,12
† F60 **	† F60**					208, 230/460V-60 Hz, 3Ø	3,450	1,12
† F50 **	† F50**					220/380V-50 Hz, 3Ø	2,850	1,12
		M60 **				208, 230/460V-60 Hz, 3Ø	3,450	2,24
		M50 **				220/380V-50 Hz, 3Ø	2,850	2,24
			A	A		Air Motor	3,000	2,24
					A	Gas Engine	3,600	4,47

*Suffixes AC, BC, CC & DC indicate pumps for Canadian orders only.
NOTE: All electric units have 24 volt secondary circuit.
**Specify voltage required.

† These pumps do not start under full load unless valve is in "neutral" position (requires open or tandem center valve) and are not recommended for frequent starting and stopping.

2 VALVE (See pages 50-60)

	Manifold/Manual/Air Operated Directional Valves	Function		Manifold/Manual/Air Operated Directional Valves	Function
AB	9628 manual, tandem center	4-way, 3 pos.	O	9609 manual, pressure compensated flow control	3-way, 4 pos.
AC	9632 manual "twin" tandem and open center	valves	R	9506 manual, tandem center "Posi-Check®"	
A	None	—	RR	9511 manual, open center	4-way,
B	9626 manifold	Manifold	S	9500 manual, tandem center	3 pos.
C	9584 manual	3-way,	T	9507 manual, closed center "Posi-Check®"	valves
D	9582 manual	2 pos.	U	9501 manual, closed center	
E	9610 automatic, pilot operated	valves		**Solenoid Operated Directional Valves**	**Function**
G	9504 manual	3/4-way,	FF	9569 solenoid operated - 24 volt	3-way, 2 pos.
JJ	9594 air operated	2 pos. valves	HH	9572 solenoid operated - 24 volt	3/4-way, 2 pos.
L	9502 manual, closed center "non-interflow"	3-way,	PP	9599 solenoid operated - 24 volt	3-way, 3 pos.
M	9520 manual, tandem center "Posi-Check®"	3 pos.	VV	9512 solenoid operated - 24 volt	4-way,
N	9576 manual, metering tandem center	valves	WW	9615 solenoid operated - 24 volt	3 pos. valves

3 VALVE CONTROL (See page 116)

	Valve Remote Control	Use with Valve		Valve Remote Control	Use with Valve
A	None	–	Z	202778 remote hand control, 3,1 m	9512 or 9615
X	304718 remote hand control, 3,1 m	9572	ZF	309653 remote foot control, 3,1 m	9512, 9615,
XF	309652 remote foot control, 3,1 m	9572			9569 or 9599
Y	202777 remote hand control, 3,1 m	9569 or 9599	ZZ	209593 remote hand control, 3,7 m	9594

4 GAUGE (See page 124-125)

	Pressure Gauges
A	None
B	Other – Specify
G	9041 0-10.000 psi – 0-700 Bar (63 mm dia.)
H	9040 0-10.000 psi – 0-700 Bar (Liquid) (63 mm dia.)
J	9051 0-10.000 psi – 0-700 Bar (100 mm dia.)
M	9052 0-10.000 psi – 0-700 Bar (Liquid) (100 mm dia.)

6 PRESSURE CONTROL (See page 133)

	Pressure Controls
A	With standard external pressure regulator
C	Other – specify
D	350199 premium external pressure regulator. See Power Team Catalog product No. 9633 for details.

NOTE: Pressure controls are factory pre-set at 700 bar unless otherwise specified.

8 MOTOR CONTROL (See page 116)

	Electric Motor Controls
A	Standard On/Off/Pulse control (does not include remote switch) for A, B, C, D, F and M electric pumps. Also used for remote controlled solenoid valves.
B	None
C	25017 remote motor hand switch, 3,1 m.
D	203225 remote motor hand switch, 3,1 m. (heavy duty)
E	10461 remote motor foot switch, 3,1 m.
	Air Motor Controls
AA	Other
B	None
P	27876 hand motor control (for PA55 & PA90 series)
Q	27877 foot motor control (for PA55 & PA90 series)

10 OIL LEVEL/TEMP. GAUGE (SEE PAGE 118)

	Oil Level/Temperature Gauge
A	None
BB	350431 oil level/temperature gauge

11 CASTERS (See page 124)

	Casters
A	None
C	10494 caster for use with 400630R9 reservoir (Specify quantity of four)

5 GAUGE ACCESSORY (See page 125)

	Gauge Accessories
A	None
N	9049 pulsation dampener – All dry gauges

7 PRESSURE SWITCH (See page 117)

	Pressure Switch
A	None
B	9625 electric pressure switch (35-700 bar)
	NOTE: Pressure switch is factory pre-set at 700 bar unless
	otherwise specified.
C	9641 pilot operated air control valve – N.C.
D	9643 pilot operated air control valve – N.O.

9 RESERVOIR (See page 119)

	Reservoirs	Capacity
A	None	–
B	Other – Specify	–
D	400630R9 – PE55, PE90, PE120, PA55 and PA90 series	9,5 l
E	61165† – PE55, PE90, PE120, PA55 and PA90 series (Oil temperatures in excess of 65.5˚ C. may cause permanent failure of the thermoplastic reservoir)	7,6 l
F	RP22‡ – PE55, PE90, PE120, PA55 and PA90 series	9,5 l
H	617990R9 Same as D except with drain port	9,5 l
J	RP50 – PE55, PE90, PE120, PA55 and PA90 series	19 l
K	401370R9 – PG55 series	19 l
P	209124 - PE55, PE90, PE120, PA55 and PA90 series	26,5 l
V	RP100 - PE55, PE90, PE120, PA55 and PA90 series	37,9 l
W	RP101 – PG55 series	37,9 l

NOTE: Includes cover adapter and misc. accessories when applicable.
†High density polyethylene.
‡Aluminum.

12 OIL (See page 126)

	Oil
E	Ship pump without oil
F	9637 3,8l. standard hydraulic oil
G	9638 9,5l. standard hydraulic oil
Q	9639 3,8l. Flame-Out hydraulic oil
R	9640 9,5l. Flame-Out hydraulic oil
U	9645 3,8l. biodegradable hydraulic oil
V	9646 9,5l. biodegradable hydraulic oil

NOTE: Select type of hydraulic oil and specify quantity.

PUMPS

Hydraulic Pump
ACCESSORIES

25017
202777
202778
304718

203225

10461

251660

309652
309653

209593

17627
216209

ON/OFF MOTOR CONTROL

The following remote control switches will give you momentary "ON" control of your hydraulic pump. These switches are deadman type, spring loaded to the "OFF" position. They can be used with any Power Team electric hydraulic pumps.

No. 25017 - Remote hand control. Has a push button switch, with a 3,1 m cord. Wt., 0.4 kg.

No. 203225 - Remote hand control. Heavy-duty with single push button switch in a neoprene housing with 3,1 m cord. Housing seals out dust, lint and liquids (unit is not submersible). Wt., 0,4 kg.

No. 10461 - Remote foot control, with 3,1 m cord. Wt., 1,4 kg.

No. 251660 - Remote foot control, with 3,1 m cord. For use with the PE10 style pumps. Wt., 0,4 kg.

SOLENOID & MOTOR CONTROL

For use on solenoid valves that are used on single-acting cylinders:

No. 202777 - Remote hand control. Has rocker style switch that is momentary advance, spring center hold and detented retract. It comes with a 3,1 m cord, for use with 3-way/2 or 3-position valves. Wt.,0,4 kg. For use on solenoid valves that are used on double-acting cylinders:

No. 202778 - Remote hand control. Has rocker style switch that is momentary advance, spring center hold and momentary retract. It comes with a 3,1 m cord, for use with 4-way/3-position valves. Wt., 0,4 kg

No. 309653 – Remote foot control. Can be used in place of either of the above hand controls to control the same type of valves. The switch is momentary on both the advance and retract position and is spring centered to the hold position. This foot switch comes with 3,1 m cord. Wt., 1,8 kg.

No. 17627 – Remote foot control. Same as the No. 309653 but without a cord. Wt., 0,9 kg.

No. 304718 - Remote hand control. Has a rocker style switch that is momentary advance, spring center hold and momentary retract. The switch is wired to start and stop the motor when the valve is energized. It comes with a 3,1 m cord. To be used with 4-way/2-position valves. Wt., 0.4 kg.

No. 309652 – Remote foot control. Has same functions as No. 304718. Supplied with a 3,1 m cord. To be used with 4-way/2-position valves. Wt., 1,8 kg.

No. 216209 – Remote foot control. Same as the No. 309652, but without a cord. Wt., 0,9 kg.
NOTE: See valves listing to determine which remote to use. Page 44-51.

REMOTE AIR MOTOR CONTROLS

This remote hand control has two momentary push buttons, one for advance and one for retract with spring offset to hold. To be used with 4-way/2-position air pilot valves.

No. 209593 – Remote hand control with 3,7 m cord. Wt., 0,9 kg.

SUBPLATES

For remote mounting of control valves. They convert pump mounted valves to remote mounted valves quickly and easily.

No. 9510 - Subplate for remote mounting the following valves; 9500, 9501, 9502, 9504, 9506, 9507, 9511, 9552, 9572, 9575, 9576, 9592, 9594 and 9609. Wt., 1 kg.

No. 9620 - For use with 9500, 9501, 9502, 9552, 9572, 9592 and 9594. Same as No. 9510 but has integral pressure regulating valve. Wt., 1,7 kg.



9510 and 9620 attach to the bottom of valve for remote mounting. The 9515 and 9521 mount between the pump cover plate and valve.



PUMP-MOUNTED SUBPLATES

When fitted between pump cover plate valve mounting flange and control valve, provides a separate 3/8" NPTF female port, open to "return" regardless of position of valve. Also provides a separate 3/8" NPTF female pressure port. This subplate can be useful when you desire to use one pump with a deck-mounted control valve, plus a separate remote-mounted valve to control another function. For use with the following valves: 9500, 9501, 9502, 9504, 9506, 9507, 9511, 9552, 9572, 9575, 9576, 9592, 9594 and 9609.

No. 9515 - Subplate, Wt., 0,6 kg.

No. 9521 - Subplate for use under most pump mounted valves to provide adjustable pressure control on units not equipped with an external pressure regulator. Wt., 1,7 kg.

9510
9515

9620



9521



AIR FILTER/REGULATOR/LUBRICATOR

Recommended for use with single-speed air/hydraulic pumps found on pages 55-69.

No. 9531 - Filter/regulator. 1/4" NPTF inlet and outlet. Wt., 0,4kg.

9531

PRESSURE SWITCH

Application: Used in a hydraulic circuit where system pressure must be "held". Automatically (electrically) turns off pump motor when predetermined system pressure is reached. Attaches directly to control valve manifold or can be mounted "in-line" to read system pressure. Has a 1/4" NPTF male thread, and a 1/4" NPTF fitting for gauge mounting if required. Adjustable from 70 to 700 bar. Can also be used to actuate other electrical devices in the system. Wired "normally open" and held closed by spring pressure.

IMPORTANT: Electrical rating of switch is 5 amps at 250 volts max. To prevent permanent damage to switch, a control relay must be installed to handle currents or voltage exceeding these limits. Pressure switch should never be used to directly actuate the electrical motor.

No. 9625 - In-line pressure switch with 1/4" NPTF gauge port. Wt., 0,5 kg.

9625

PILOT OPERATED AIR CONTROL VALVES

Application: For use when an air pilot signal is required at a set hydraulic pressure. Can be used to shift valves, and start or stop pneumatic pumps. Attaches directly to control manifold or can be mounted "in-line" to read system hydraulic pressure. Automatically turns on an air pilot signal when a predetermined system pressure is reached. Has 1/4" NPTF male thread and 1/4" NPTF fitting for gauge mounting if required. Adjustable from 35-700 bar. Maximum rating of 700 l at 7 bar.



No. 9641 - Pilot operated control valve, normally closed, with 1/4" NPTF male thread. Wt., 0,4 kg.

No. 9643 - Same as 9641 except normally open. Wt., 0,4 kg.



9641
9643

Hydraulic Pump
ACCESSORIES

252511
252512

206767
250175

350431



10494

207762

16339

OIL COOLER KITS
No. 252511 - Oil cooler kit designed for use with PE604T or PE604PT pumps with 115 VAC. Wt.,2,2Kg.
No. 252512 - Oil cooler kit designed for use with PE604T or PE604PT pumps with 220 VAC. Wt.,2,2 kg.

RESERVOIR BREATHER KITS
No. 206767 - Reservoir breather kit designed for use on PA17, PA55, PE17, PE55, PE84, PE90, PE120, PG55, PG120, PQ60 and PQ120 series pumps. Wt., 0,6 kg.
No. 250175 - Reservoir breather kit designed for use on PE21 and PE46 series pumps. These kits replace the reservoir filler cap when the pump is used in dusty and dirty environments. Wt., 0,6 kg.

CASTERS
50,8 mm diameter casters attach to the bottom of large reservoir for portability. Sold individually; order the amount you need.
No. 10494 - Single caster wheel. Wt., 0,1kg.

FLUID LEVEL/TEMPERATURE GAUGE
Displays fluid level and temperature of hydraulic oil in reservoir. 32°-212°F, 0°-100°C. 32 mm wide and 162 mm high.
No. 350431 - Fluid level/temperature gauge.

FOOT CONTROL GUARD
Guard for use with 10461 and 251660 foot controls.
No. 16339 - Wt., 2 kg.

MAGNETIC STRIP
Magnetic strip with adhesive back can be added to No. 25017, 202777, 202778 and 304718 hand controls. Provides 2,7 kg. of holding force.
No. 207762 - Wt., 0,1 kg.

VITON* SEAL KITS
(SEE PAGE 33)

Viton* seal kits

Order Number	Use With	Model
300507	P12	All
300472	P23, P55	All
300510	P59	All
300508	P157, P159, P300	A
300690	P157, P159	B
300696	P300	B
300508	P157D, P159D, P300D	A
300693	P157D, P159D	B
300699	P300D	B

VITON* SEAL KITS Can be used in all "C" and "RH" series cylinders (see pages 14-15 and 22-23), as well as the P12, P55, P59, P157/P159, P157D/P159D and P300/P300D series of hand pumps. These seals are required when fire resistant hydraulic fluids are used. For use with phosphate ester fluids. Not required with Flame-Out fluid.

*** Viton is the E.I. duPont De Nemours & Co., Inc, trade name for flouroelastomers.**

UNIVERSAL PUMP CART
Mobilize your hydraulic pumps with the PC200. The rugged tubular frame can easily handle pumps weighing up to 90 kg. With 305 mm wheels, the cart rolls easily. Just load the pump onto the cart and wheel it right to the job. The universal mounting hole pattern lets you handle a wide variety of Power Team pumps.
No. PC200 - Universal pump cart with 305 mm wheels. Cart can be used with the following pumps: PA60, PA64 and PA554 air/hydraulic pumps; PE55 series, PE183-2 and PE184-2 electric/hydraulic pumps; PE21, PQ60 and PQ120 series "Quiet" pumps; PG55 series gas engine/hydraulic pumps; and pumps with optional 19- and 38 l - reservoirs; Nos. RP50, RP51, RP101 and RP103. Wt., 12,3 kg (Shown with pump, pump not included)

PROTECTIVE PUMP ROLL CAGE
Safeguards pump, gas engine and valves on the job site. Horizontal bars provide convenient hand holds for carrying pump, a pick-up point permits lifting unit with an overhead crane or other device. Standard equipment on PG1203 and PG1204. Can be ordered as an option with any other gas, air, or electrically driven hydraulic pump equipped with a 38 l reservoir.
Note: Refer to PG1203/PG1204 specification chart (pages 108-109) for dimensions of roll cage.
No. PC200RC - Roll cage for use with PC200. (Cannot be used on pumps with 38 liter reservoirs.) Wt., 16 kg.
No. RC5 - Roll cage. Wt., 9 kg.

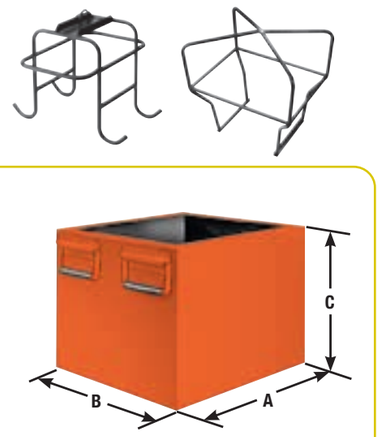

LARGE CAPACITY RESERVOIRS

Capacity (liter)	Order Number	Usable Oil (l/min)	Use With	Size (mm) A	B	C
7,6	**RP20****	7,1	PA6, PA50 series (models A-E)	292	241	165
7,6	**RP20-F****	7,1	PA6 series (model F), PA 50 series (model F & G)	292	241	165
9,5	**RP20M***	7,2	PA6, PA50 series (models A-E)	292	241	165
9,5	**RP20M-F***	7,2	PA6 series (model F), PA50 series (model F & G)	292	241	165
9,5	**RP21***	7,2	PE18 series	292	241	165
9,5	**RP22†**	7,1	PE55, PE90, PE120, PA55	292	241	165
19	**RP50**	18,4	PE55, PE90, PE120, PA55	381	318	203
19	**RP51**	18,4	PA46, PE46, PE21	381	318	203
37,9	**RP100**	35,1	PE55, PE90, PE120, PA55	381	318	356
37,9	**RP101**	35,1	PG55, PG120	381	318	356
37,9	**RP103***	37,0	PQ60, PQ120	392	362	313
37,9	**RP104**	35,1	PA46, PE46, PE21	381	318	356

*** Four mounting holes: 1/2"-20, for 50.8 mm diameter swivel casters (No. 10494)**
** High density polyethylene reservoir. † Aluminum reservoir.

NOTE: All metal reservoirs are equipped with drain plugs and all necessary conversion items.
Hydraulic oil is not included with reservoir kits. Please order separately. See page 126.

METAL RESERVOIR CONVERSION KITS FOR PUMPS *INCLUDES GASKETS AND FASTENERS.

Metal Pump Number	Res. Order Number	Metal Reservoir Capacity (l)	Reservoir Weight (kg)	Metal Pump Number	Res. Order Number	Metal Reservoir Capacity (l)	Reservoir Weight (kg)	Metal Pump Number	Res. Order Number	Metal Reservoir Capacity (l)	Reservoir Weight (kg)
PA6	213896	1,7	1,4	**PA50**	213896	1,7	1,4	**PA174**	213895	9,5	4,1
PA6A	213896	1,7	1,4	**PA50R**	213896	1,7	1,4	**PE172**	213895	9,5	4,1
PA6D	213896	1,7	1,4	**PA6R**	213896	1,7	1,4	**PE172A**	213895	9,5	4,1
PA6-2	213895	9,5	4,1	**PA50R2**	213895	9,5	4,1	**PE172S**	213895	9,5	4,1
PA6D2	213895	9,5	4,1	**PA172**	213895	9,5	4,1	**PE174**	213895	9,5	4,1

HYDRAULIC ACCESSORIES

HOSES Page **122**
Rubber
Urethane
Non-Conducting

COUPLERS Page **123**
Quick Connect
Flush Face

GAUGES Page **124-125**
Heavy Duty Hydraulic Pressure Gauges
Digital and Analog

FLUIDS Page **126**

Standard Oil	0,9 l, 3,8 l, 9,5 l, 208 l
Flame Out	3,8 l, 9,5 l
Bio Degradable	3,8 l, 9,5 l
Low Temperature	3,8 l

MANIFOLDS Page **127**
Standard Blocks
Blocks with Valves

700 BAR FITTINGS Page **128**
Connectors
Couplings
Crosses
Elbows
Tees
Swivels
Special Adapters

VALVES Page **129-133**
In-Line
Remote
See Also Pump Mounted...pages 45-51

Hoses

Polyurethane Rubber Non-Conductive

- **3/8" NPTF fittings on both ends.**
- **Operating pressure is 700 bar. All comply with SAE 100R10 standard.**

A Non-conductive hose
For applications requiring electrical isolation by the hose, non-conductive hose has a leakage factor of less than 50 microamperes, considered a safe level of conductivity by SAE standards. The covering is polyurethane and colored orange for easy identification as non-conductive hose. The covering is not perforated, preventing moisture from entering the hose and affecting its overall conductivity. All non-conductive hoses have a minimum burst pressure of 2.800 bar.

B Rubber hose
6 spiral (R13 specification) rated hose reinforced with two braids of high tensile steel wire and have a tool 4:1 safety factor. The rubber covering is oil and weather resistant.

C Polyurethane hose
Made with Nylon core and then one braid of Aramid and one braid of wire reinforcement with a orange polyurethane cover (Conductive). 4:1 safety factor standard 700 bar WP / 2800 bar BP.

D Hydraulic hose assembly
No. 9764E – Hose assembly consisting of 9767E (1,8 m hose), 6,4mm I.D. polyurethane with 9798 hose half coupler and 9800 dust cap.
No. 9754 – Hose assembly consisting of 9756 (1,8 m hose), 6,4 mm I.D. rubber with 9798 hose half coupler and 9800 dust cap.

CYLINDER RETURN TIME

Cylinder	No. 9769E 3,1 m Hose 6,4 mm I.D.	No. 9781E 3,1 m Hose 9,5 mm I.D
C2514C	51 sec.	14 sec.
C556C	1 min., 30 sec.	24 sec.
C5513C	4 min., 12 sec.	59 sec.
C10010C	6 min., 56 sec.	1 min., 3 sec.

The figures show the relative effect two styles of hose can have on return time. Actual times may vary.

ORDERING INFORMATION

Hose Type	Hose I.D.	Hose Length	Burst Rating	Order No.
Polyurethane	6,4 mm	0,6 m	2 800 bar	**9765E**
Polyurethane	6,4 mm	0,9 m	2 800 bar	**9766E**
Polyurethane	6,4 mm	1,8 m	2 800 bar	**9767E**
Polyurethane	6,4 mm	1,8 m	2 800 bar	**9764E***
Polyurethane	6,4 mm	2,4 m	2 800 bar	**9768E**
Polyurethane	6,4 mm	3,1 m	2 800 bar	**9769E**
Polyurethane	6,4 mm	3,7 m	2 800 bar	**9770E**
Polyurethane	6,4 mm	6,1 m	2 800 bar	**9771E**
Polyurethane	6,4 mm	15,3 m	2 800 bar	**9772E**
Polyurethane	6,4 mm	22,9 m	2 800 bar	**9750E**
Polyurethane	6,4 mm	30,5	2 800 bar	**9751E**
Polyurethane	9,5 mm High Flow	1,8 m	2 100 bar	**9780E**
Polyurethane	9,5 mm High Flow	3,1 m	2 100 bar	**9781E**
Polyurethane	9,5 mm High Flow	6,1 m	2 100 bar	**9782E**
Polyurethane	9,5 mm High Flow	15,3 m	2 100 bar	**9783E**
Rubber, Wire-braid	6,5 mm	0,9 m	2 800 bar	**9755E**
Rubber, Wire-braid	6,5 mm	1,8 m	2 800 bar	**9756E**
Rubber, Wire-braid	6,5 mm	1,8 m	2 800 bar	**9754E***
Rubber, Wire-braid	6,4 mm	2,4 m	2 800 bar	**9757E**
Rubber, Wire-braid	6,4 mm	3,1 m	2 800 bar	**9758E**
Rubber, Wire-braid	6,4 mm	3,7 m	2 800 bar	**9759E**
Rubber, Wire-braid	6,4 mm	6,1 m	2 800 bar	**9760E**
Rubber, Wire-braid	6,4 mm	9,1 m	2 800 bar	**9761E**
Rubber, Wire-braid	6,4 mm	15,3 m	2 800 bar	**9762E**
Rubber, Wire-braid	9,5 mm High Flow	0,9 m	2 800 bar	**9733E**
Rubber, Wire-braid	9,5 mm High Flow	1,8 m	2 800 bar	**9776E**
Rubber, Wire-braid	9,5 mm High Flow	3,1 m	2 800 bar	**9777E**
Rubber, Wire-braid	9,5 mm High Flow	4,6 m	2 800 bar	**9734E**
Rubber, Wire-braid	9,5 mm High Flow	6,1 m	2 800 bar	**9778E**
Rubber, Wire-braid	9,5 mm High Flow	9,1 m	2 800 bar	**9735E**
Rubber, Wire-braid	9,5 mm High Flow	12,2 m	2 800 bar	**9736E**
Rubber, Wire-braid	9,5 mm High Flow	15,3 m	2 800 bar	**9779E**
Non-Conductive	6,4 mm	1,8 m	2 800 bar	**9773**
Non-Conductive	6,4 mm	3,1 m	2 800 bar	**9774**
Non-Conductive	6,4 mm	6,1 m	2 800 bar	**9775**

CE

NOTE: Polyurethane hoses not recommended for use where heat or weld splatter conditions exist.
Other lengths available on request

*Furnished with 9798 hose half coupler and 9800 dust cap.

Couplers

Standard & Flush-Face

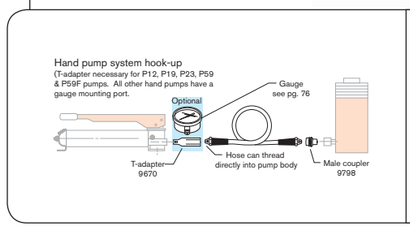



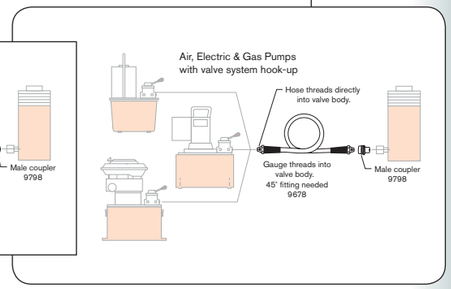

CYLINDER AND HOSE COUPLERS
Designed for use up to 700 bar with hydraulic jacks, cylinders, etc. They are the threaded union type for interchanging cylinders in seconds. Each half is valved with a precision ball for a tight shutoff when disconnected. These couplers also permit the separation of cylinders or hose from pump when at 0 psi with minimal oil loss.
No. 9795 – Complete quick coupler, 3/8" NPTF. (Includes two 9800 dust caps.)
No. 9798 – Male (hose) half coupler (includes hose half dust cap), 3/8" NPTF.
No. 9796 – Female (cylinder) half coupler with No. 9800 dust cap, 3/8" NPTF.
No. 9796-V – Same as 9796, but with Viton seals.
No. 9796-E – Same as 9796, but with EPR seals.

No. 9799 – Optional metal dust cap (hose half).

No. 9797 – Optional metal dust cap (cylinder half).

NO-SPILL, PUSH-TO-CONNECT HYDRAULIC HOSE COUPLERS
High flow, no-spill, push-to-connect couplers with locking collar and flush face designed for high pressure applications. The flush-face concept makes it easy to clean both coupler ends before connecting. Our unique push-to-connect, "dry-break" design eliminates oil spillage. The locking collar makes accidental disconnects a thing of the past. For 700 bar operation. Designed to permit high oil flow.
No. 9792 – Female (cylinder) half quick coupler only. Wt., 0.1 kg.
No. 9793 – Male (hose) half quick coupler only. Wt., 0,1 kg.
No. 9794 – Complete quick coupler (male and female). Dust caps not included. Wt.,0,2 kg.

HYDRAULIC COUPLER DUST CAP
Dust cap fits either male or female half couplers.
No. 9800 – Dust cap. For male or female 3/8" NPTF half couplers. Wt., 0,1 kg.

Gauges

Analog & Digital

9042DG

Technical Attributes

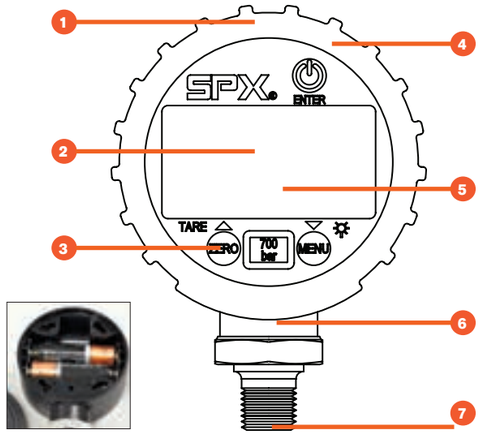

1. Protective rubber boot
2. Back-light and large 0.48 in (12.2 mm) display easy reading
3. Displays in multiple engineering units: psi, bar, mPa, inHg, kg/cm2
4. Weatherproof IP67 enclosure.
5. 2,000 hr. life, (2) AA (LR6) batteries.
6. Typical Cycle Life: 10,000,000.
7. 1/4" NPTF Male Threads.

Typical Mounting Setups

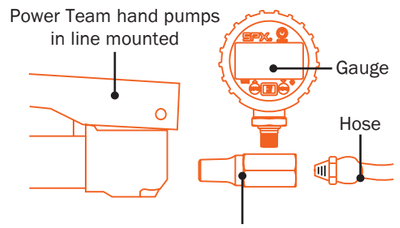

9670 (Tee adapter. For installing gauge between pump and hose coupling. Has 1/4" and 3/8" NPTF female and 3/8" NPTF male ports).

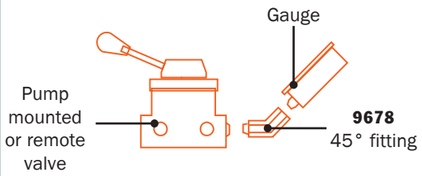

Digital hydraulic pressure gauge

- Digital gauge is easier to read and offers better accuracy[1] than a conventional analog gauge.
- The laser welded stainless steel sensor & socket and the IP67 weatherproof rating make this product suitable for use in even the most demanding of applications.Five pre-programmed engineering units allow technicians to read pressure in the unit of measure most applicable to the process.
- The gauge also features a bar graph display for enhance visibility.
- Includes: automatic off (battery conservation), pressure tare, minimum pressure memory and maximum pressure.
- Vibration & Shock tested to MIL-STD-202G.
- Agency Compliance/Approval: RoHS, CE, ASME B40.7, UL, cUL 61010-1 memory.
- The gauges are calibrated for life at the factory. (They can be certified in the field if required).

Gauge No.	Face Dia	Rated Pressure psi (bar)	Temp Range	Use with Cylinder Series	IP Rating	Batteries	Typical Battery Life	Accuracy	Product Weight
9042DG	2-1/2"	0-10,000 (0-700)	-4 °F to +140 °F (-20 °C to +60 °C)	All	IP67	2 x AA (LR6)	2,000 hrs	0.5% F.S.	0.53 lb 0.24 kg

Gauges

Analog & Digital

Heavy-duty Hydraulic Pressure Gauges

- Gauges feature an easily readable and highly visible, red day-glo needle.
- High strength steel bourdon tube ensures high cycle life.
- Have 1/4" NPT connections.

9049

9040E

STANDARD PRESSURE GAUGE ORDERING INFORMATION

Face Dia.	psi/Bar	Tons	Major Graduations	Minor Graduations	Silicone Filled	Use With Cylinder Series	Gauge No.
63,5 mm	0-10,000 /.0-690	–	2000 psi, 100 Bar	200 psi, 20 Bar	Yes	All	**9040E**
100 mm	0-10,000 /.0-690	–	1000 psi, 100 Bar	100 psi, 10 Bar	Yes	All	**9052E**
100 mm	0-10,000 /.0-690	0-5	2000 psi, 1 Ton	200 psi, .1 Ton	Yes	C & RLS	**9053E**
100 mm	0-10,000 /.0-690	0-10	2000 psi, 1 Ton	200 psi, .1 Ton	Yes	C, RD, RH, RLS & RSS	**9055E**
100 mm	0-10.000 /0,0-690	0-15	2000 PSI, 1 Ton	200 PSI, 0,2 Ton	Yes	C	**9057E**
100 mm	0-10,000 /.0-690	0-17.5, 0-30 and 0-50	2000 psi, 5 Ton	200 psi, .5 Ton on 30, 50 Ton Scales; .2 Ton on 17.5 Ton Scale	Yes	RT172, RT302, RT503	**9059E**
100 mm	0-10.000 /0,0-690	0-20	2000 PSI, 5 Ton	200 PSI, 0,5 Ton	Yes	RH, RLS, RSS	**9061E**
100 mm	0-10,000 /.0-690	0-25	2000 psi, 5 Ton	200 psi, .5 Ton	Yes	C & RD	**9063E**
100 mm	0-10,000 /.0-690	0-30	2000 psi, 5 Ton	200 psi, .5 Ton	Yes	RH†, RLS & RSS	**9065E**
100 mm	0-10,000 /.0-690	0-50	2000 psi, 5 Ton	200 psi, .5 Ton	Yes	RH†, RLS & RSS	**9067E**
100 mm	0-10,000 /.0-690	0-55	2000 psi, 5 Ton	200 psi, .5 Ton	Yes	C, R, RA & RD	**9069E**
100 mm	0-10,000 /.0-690	0-60	2000 psi, 5 Ton	200 psi, 1 Ton	Yes	RH	**9071E**
100 mm	0-10,000 /.0-690	0-75	2000 psi, 5 Ton	200 psi, 1 Ton	Yes	C, RLS & RD8013	**9073E**
100 mm	0-10,000 /.0-690	0-100	2000 psi, 10 Ton	200 psi, 1 Ton	Yes	C, R, RA, RD, RH, RLS†, RSS† & RT1004†	**9075E**
100 mm	0-10,000 /.0-690	0-150	2000 psi, Initial 10 Then 20 Ton	200 psi, 2 Ton	Yes	C, R, RD & RLS	**9077E**
100 mm	0-10,000 /.0-690	0-200	2000 psi, 20 Ton 10 Then 20 Ton	200 psi, 2 Ton	Yes	R, RD & RH†	**9079E**
150 mm	0-10,000 /.0-690	0-690	1000 psi, 100 Bar	100 psi, 10 Bar	No	All	**9089**

† The tonnage scale on the gauge is based on a different effective area.
A slight error in tonnage reading will occur relative to the different effective area.
Note: Gauge 9040-9079 are available with readings in bar. To order, add the letter "E" to the part number (example 9075E).

Fluids
HYDRAULIC

Standard, Flame Out®, Biodegradable and Low Temp.

Oil Description	Qty.	Order No.
Standard Oil	0,9 l	**9636**
Standard Oil	3,8 l	**9637**
Standard Oil	9,5 l	**9638**
Standard Oil	208 l	**9616**
Flame-Out®	3,8 l	**9639**
Flame-Out®	9,5 l	**9640**
Biodegradable	3,8 l	**9645**
Biodegradable	9,5 l	**9646**
Low Temp.	3,8 l	**9647**

SPECIFICATIONS

Description	Grade (ASTM)	Spec. Gravity at 16°C (kg / l)	Color (ASTM)	Flash Point	Fire Point	Pour Point	Viscosity SUS @ (38°C)	Viscosity SUS @ (99°C)	Viscosity Index	Foam Test (ASTM)
Standard Oil	215	0.88	2.0	204°C	221°C	-34°C	215	48	100 min.	Pass
Flame-Out®	220	0.91	Light Amber	260°C	288°C	-26°C	220	55	140 min.	Pass
Biodegradable	–	0.92	2.0	224°C	NA*	-30°C	183	53	213 min.	Pass
Low Temp.	–	0.87	6.5 (Red)	180°C	204°C	-45°C	183	52	190 min.	Pass

*Not available.

Standard Hydraulic Oil
- For dependable performance of all your hydraulic pumps and cylinders.
- Contains foam suppressant additives and has a high viscosity index.

Flame-Out® 220 fire resistant hydraulic fluid
- Contains anti-rust, anti-foam and anti-sludge additives.
- Provides fire resistant protection.
- Provides maximum lubrication and heat transfer.
- Offers a wider operating temperature range.
- No need to change seals in your Power Team equipment. Just drain the standard oil and replace it with Flame-Out 220.

Biodegradable Hydraulic Fluid
- Biodegradable, non-toxic fluid withstands moderate to severe operating conditions; provides excellent protection against rust.
- Offers superior anti-wear properties, has excellent multi-metal compatibility.

Developed to meet stringent performance requirements and satisfy growing environmental needs for hydraulic fluids which are readily biodegradable and non-toxic. Can be used with all Power Team pumps, cylinders, valves and other accessories using standard seals. Depending on the contamination or degradation levels which might be present in used fluid, small amounts of this substance, if spilled, will not affect ground water or the environment. Acceptable methods of disposal include use as a fuel supplement. Since this fluid will not typically be hazardous waste, additional disposal options may be available, including land farming or processing through sewage treatment facilities, if necessary approvals are obtained from appropriate regulatory authorities. This fluid has been tested against EPA 560/6-82-003 and OECD 301 for biodegradability, and toxicity has been tested against EPA 560/ 6-82-002 and OECD 203: 1-12. Not recommended for operation in temperatures below -7°C or above 71°C. Recommended storage temperatures not below -23°C or above 77°C.
For additional technical information or to order a **MATERIAL SAFETY DATA SHEET** call **1-800-477-8326**

Low–Temperature Oil
Provides smooth, reliable operation in the coldest climate conditions.

(Note: Will burn if heat source is extreme enough. Will not, however, propagate the flame and is self-extinguishing when there is no ignition source.)

Manifolds

Remote and Pump Mounted

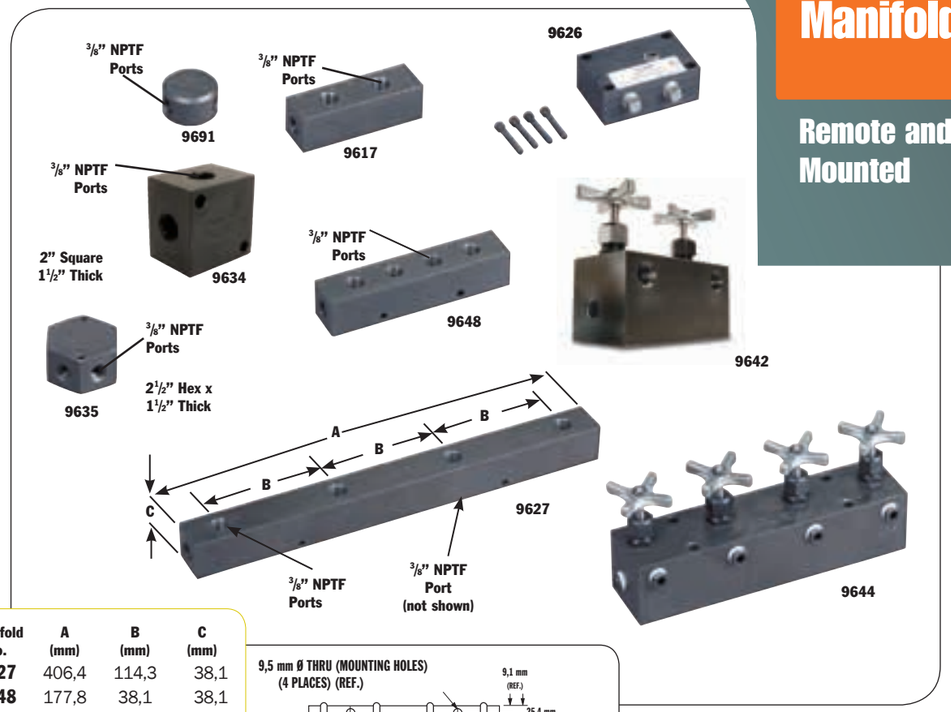

Manifold No.	A (mm)	B (mm)	C (mm)
9627	406,4	114,3	38,1
9648	177,8	38,1	38,1

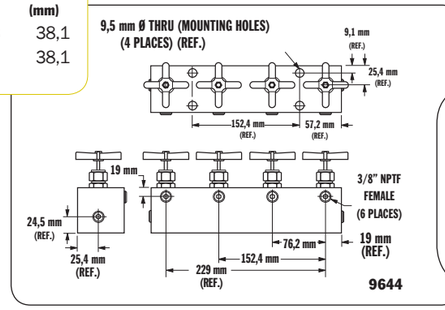

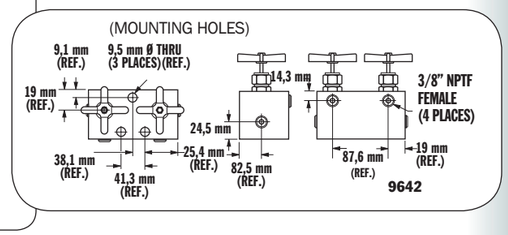

No. 9691 – "Y" Manifold
Extremely useful when connecting two hydraulic cylinders to a single line. Has three 3/8" NPTF ports.
Wt. 0,45 kg.

No. 9634 – Manifold block
This manifold is for multiple-cylinder installations, has four 3/8" NPTF ports and two 1/4" mounting holes. Wt. 0,7 kg.

No. 9635 – Manifold block
This hex-shaped manifold offers extra versatility with six 3/8" NPTF ports and two 1/4" mounting holes.
Wt. 0,9 kg.

No. 9617 – Manifold block
When a multiple-cylinder installation is required, this manifold is invaluable. Has six 3/8" NPTF ports to handle larger multiple-cylinder systems.
Wt. 1.4 kg.

No. 9648 – Manifold block
This 178 mm long manifold block has seven 3/8" NPTF ports and two 6,4 mm mounting holes. Wt.1,2 kg.

No. 9627 – Manifold block
This 406,4 mm long manifold block allows you to mount the 9575 or 9596 valves without interference. Has seven 3/8" NPTF ports and two 6,4 mm mounting holes. Wt. 2,7 kg.

No. 9626 – Pump mounted manifold block
Converts pumps with pump mounted valves for use with remote mounted valves. This manifold block is subplate mounted on the pump cover plate and provides 3/8" NPTF pressure and return ports. Maximum recommended flow rate is 19 l/min. Note: If used on PE30 or PG30 series pump, 12,7mm longer mounting screws are required. Order four (4) No. 11956 screws separately.

9642 AND 9644 MANIFOLD BLOCKS WITH NEEDLE VALVES
For independent multiple-cylinder operation, feature needle valves for precise manual control. Designed for remote-mounted applications. Can be used with all Power Team pumps.
No. 9642 – Manifold with two needle valves for control of two cylinders. Has four 3/8" NPTF ports. Wt. 3,7 kg
No. 9644 – Manifold with four needle valves for control of four cylinders. Has six 3/8" NPTF ports. Wt. 7,4 kg

Fittings

700 bar
Power Team fittings:
All applications.

	9190	Hyd. tubing. 3/8" O.D. x .065" wall, 15,3 m. (10 pieces 1,53 m long.) Wt. 5,5 kg.
	**9670**	Tee adapter. For installing gauge between pump and hose coupling. Has 1/4" and 3/8" NPTF female and 3/8" NPTF male ports. Wt. 0,2 kg.
	**9671**	Double tee adapter. Permits use of more than one cylinder in series with one pump. Three 3/8" NPTF female ports. Wt. 0,5 kg.
	**9672**	Service tee. Two 3/8" NPTF female internal, one 3/8" NPTF male external. Wt. 0.3 kg.
	**9673***	Swivel connector. 3/8" NPSM male, 1/4" NPSM female. Wt. 0,1 kg.
	**9674**	Male connector. 43 mm long, 1/4" x 3/8" NPTF. Wt. 0,1 kg.
	**9675***	Swivel connector. 3/8" NPTF male, 3/8" NPSM female. Wt. 0,1 kg.
	**9676***	Swivel connector. 1/4" NPTF male, 3/8" NPSM female. Wt. 0,1 kg.
	**9677***	45° swivel connector. 3/8" NPTF male, 3/8" NPSM female. Wt. 0,1 kg.
	**9678**	45° fitting. Used when mounting gauge at an angle on connection such as 9670. Male and female 1/4" NPTF ends. Wt. 0,1 kg.
	**9679**	Connector. 1/4" NPTF female and 3/8" NPTF male. Wt. 0.1 kg.
	**9680**	Coupling. Both ends 3/8" NPTF female. Wt. 0.1 kg.
	**9681**	Street elbow. Male and female 3/8" NPTF ends. Wt. 0,1 kg.
	**9682**	Male connector. 43 mm long, 3/8" NPTF male ends. Wt. 0,1 kg.
	**9683**	Male connector. 57 mm long, 3/8" NPTF male ends. Wt. 0,1 kg.
	**9684**	Male connector. 57 mm long, 1/4" NPTF male ends. Wt. 0,1 kg
	**9685**	Coupling. 1/4" NPTF female and 3/8" NPTF female. Wt. 0.1 kg.
	9686	90° elbow. 3/8" NPTF female ends. Wt. 0.2 kg.
	**9687**	Pipe plug. Heat-treated, 3/8" NPTF. Wt. 0.1 kg.
	**9688**	Pipe plug. Heat-treated, 1/4" NPTF. Wt. 0.1 kg.
	**9689**	Connector. 1/4" NPTF male and 3/8" NPTF female. Wt. 0.1 kg.
	**9690**	Male connector. 43 mm long, 1/4" NPTF male ends. Wt. 0.1 kg.
	**9692**	Straight connector. 3/8" tube x 3/8" male NPTF. Wt. 0.1 kg.
	9693	90° elbow. 3/8" tube x 3/8" male NPTF. Wt. 0.1 kg.
	9694	45° elbow. 3/8" tube x 1/4" male NPTF. Wt. 0.1kg.
	**9695**	Tee. 3/8" tube. Wt. 0.1 kg.
	**9696**	Male run tee. 3/8" tube x 1/4" male NPTF. Wt. 0.1 kg.
	**9697**	Male branch tee. 3/8" tube x 1/4" male NPTF. Wt. 0.1 kg.
	**9698**	Cross. 3/8" tube. Wt. 0.2 kg.
	**9699**	45° gauge fitting. 3/8" NPTF male and female, and 1/4" NPTF female at 45°. Wt. 0.3 kg.
	**9705**	Fitting, swivel. 3/8" NPTF male to 3/8" NPTF female. 90° fitting with internal 370 micron screen. May be rotated 360° about male thread axis.

NOTE: Power Team hydraulic fittings are intended for use with our high pressure hydraulic products and are suitable for use at max. working pressures of 700 bar unless otherwise noted.

* ⚠ **CAUTION: On part numbers 9673, 9675, 9676 and 9677 the female swivel end of these adapters is a straight pipe thread (NPSM) with a 30° seat. All male pipe fittings that are used with these female swivel adapters must have an internal 30° seat in order to effect a proper seal. All Power Team male fittings are manufactured with a 30° seat except 9687 and 9688.**

Valves
HYDRAULIC REMOTE/IN-LINE

Valve selection chart



Order No.	Page No.	*Cylinder Application	Operation	Valve Type	Volt	Advance/ Return	Advance/ Hold Return	Posi-Check® Feature
9508	131	S.A & D.A.	Manual	4-way, 3 Pos. Closed Center	—	no	yes	yes
9509	131	S.A. & D.A.	Manual	4-way, 3 Pos. Tandem Center	—	no	yes	yes
9514	131	D.A.	Solenoid	4-way, 3 Pos. Tandem Center	115	no	yes	yes
9524	130	S.A. & D.A.	Solenoid	3/4-way, 2 Pos.	230	no	yes	no
9525	131	D.A.	Solenoid	4-way, 3 Pos. Tandem Center	230	no	yes	yes
9526	131	S.A.	Solenoid	3-way, 2 Pos.	230	no	yes	no
9554	130	S.A. & D.A.	Solenoid	3/4-way, 2 Pos.	24	no	yes	no
9555	131	D.A.	Solenoid	4-way, 3 Pos. Tandem Center	24	no	yes	yes
9556	131	S.A.	Solenoid	3-way, 2 Pos.	24	no	yes	no
9559	131	S.A.	Solenoid	3-way, 2 Pos.	115	no	yes	no
9593	130	S.A. & D.A.	Solenoid	3/4-way, 2 Pos.	115	no	yes	no
9595	130	S.A. & D.A.	Air	3/4-way, 2 Pos.	—	no	yes	no

Order No.	Page No.	*Cylinder Application	Operation	Valve Type	Volt	Advance/ Return	Advance/ Hold Return	Posi-Check® Feature
9575	132	S.A.	Manual	Shut-Off Valve	—	—	—	—
9580	133	S.A.	Automatic	One-way Check Valve	—	—	—	—
9581	133	S.A. & D.A.	Automatic	Pilot Op. Check Valve	—	—	—	—
9596	132	S.A.	Manual	Load Lowering Valve	—	—	—	—
9597	132	S.A. & D.A.	Automatic	Sequence Valve	—	—	—	—
9608	132	S.A. & D.A.	Automatic	Pressure Reducing Valve	—	—	—	—
9623	133	S.A. & D.A.	Automatic	Pressure Relief Valve	—	—	—	—
9631	133	S.A. & D.A.	Automatic	Metering Valve	—	—	—	—
9633	133	S.A. & D.A.	Automatic	Pressure Regulator Valve	—	—	—	—
9720	132	S.A. & D.A.	Automatic	Counter Balance Valve	—	special	—	—
9721	132	S.A. & D.A.	Automatic	Counter Balance Valve	—	special	—	—
RV21278	133	—	Automatic	Relief Valve	—	—	—	—

"S.A." represents single-acting cylinders, "D.A." represents double-acting cylinders.
For pump-mounted valves, see pages 51-57.

Valves
HYDRAULIC REMOTE MOUNTED

700 bar,
1/4" ports
19 l / min max flow

3/4-way/2-position solenoid and air actuated valves

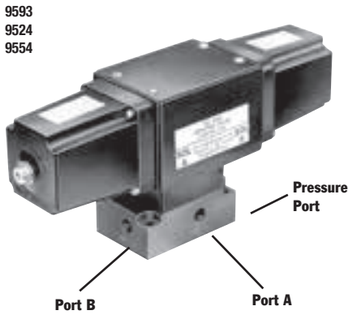

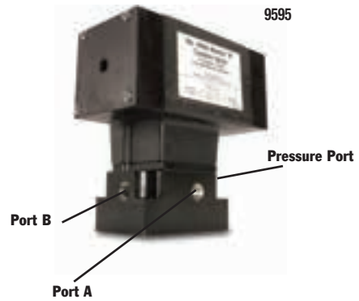

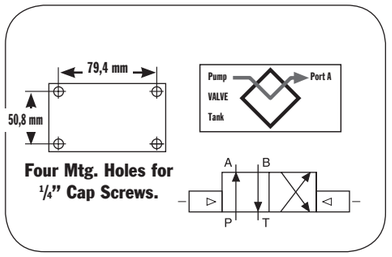

Four Mtg. Holes for 1/4" Cap Screws.



Four Mtg. Holes for 1/4" Cap Screws.

Application: Single- or double-acting cylinders.
Actuation: 9593, 9524 and 9554 are solenoid operated, 9595 is air operated.
Operation with single-acting cylinder: Either oil port "A" or "B" must be plugged on valve. With port "B" plugged, solenoid is energized to position "A," oil port "A" becomes pressurized. When solenoid is energized to position "B," oil port "A" becomes the return port.
Operation with multiple single-acting cylinders: A pressure line from one bank can be connected to oil port "A" and the other to oil port "B" on the valve. Sequence: When energized to position "A," oil port "A" becomes pressurized and clamps the fixture connected to oil port "A"; oil port "B" becomes a "return" port for cylinder connected to oil port "B," and retracts it. The opposite happens when solenoid "B" is energized.

Operation with double-acting cylinder: Port "A" is connected to "advance" port of cylinder, oil port "B" connects to cylinder "return" port. Solenoid is energized to position "A," oil port "A" becomes pressurized to extend cylinder piston. The opposite happens when solenoid "B" is energized. Valve does not hold in "retract" position.

NOTE: When using more than one valve on a pump, the tank port may require a check valve to permit inadvertent, momentary extension of a retracted cylinder.

NOTE: If pump is equipped with an internal outlet check, a "hold" position can be maintained with the pump shut off.

No. 9593 – 3/4-way/2-position, remote mounted solenoid valve, 115 volt, 50/60 Hz. Wt., 7 kg.
No. 9524 – Same as 9593 except with 230 volt, 50/60 Hz.
No. 9554 – Same as 9593 except with 24 volt, 50/60 Hz.
No. 9595 – Same as 9593 except is air operated (minimum of 3,5 bar air pressure required). Wt.,5,2 kg.

NOTE: Valves above are shipped without controls. The 9524, 9554 and 9593 can be used with the 304718 remote hand control (see page 106). The 9595 can be used with the 209593 remote hand control (see page 106).

NOTE: Valves have 1/4" NPTF ports. 3/8" to 1/4" adapters are included.

NOTE: Maximum tank line pressure for remote mounted valves is 35 bar.



1. To actuate one single-acting cylinder.



2. To actuate two single-acting cylinders.



3. To actuate one double-acting cylinder.

NOTE: Valves above are shipped without control switch. Use 202777 remote hand switch (see page 116).

⚠ CAUTION: To prevent sudden, uncontrolled descent of a load as it is being lowered, use a No. 9596 Load Lowering Valve or No. 9720 Counter Balance Valve (see page 132) in conjunction with the directional valve used in your application.





Four Mtg. Holes for 1/4" Cap Screws.

4-way/3-position (closed center) and (tandem center) manual valves with Posi-Check®
Application: Single- or double-acting cylinder. When used with single-acting cylinders, one port must be plugged. For double-acting cylinders, either port can be used for "advance" or "return."
Actuation: Lever-operated, detent positioned.
Functions: The 9508 provides "advance," "hold" and "return" positions with all ports blocked (closed center) in the "hold" position. The 9509 has "advance," "hold" and "return" with tandem center (cylinder ports are blocked, pump remains running). Both valves have "Posi-Check®" feature to guard against pressure loss when shifting from "advance" to "hold."
No. 9508 – 4-way/3-position (closed center) manual valve, including subplate for remote mounting. Wt., 2,9 kg.
No. 9509 – Same as 9508, except is tandem center.

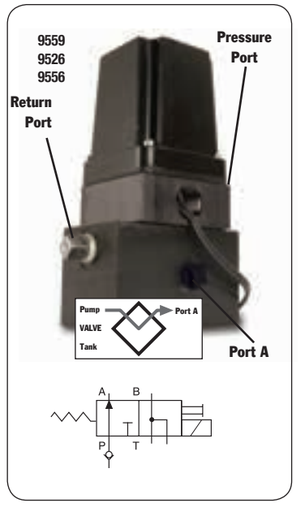

3-WAY/2-POSITION SOLENOID VALVE
Application: Single-acting cylinders.
Actuation: Solenoid operated, 115 volt, 50/60 Hz.
Function: Advances cylinder piston when solenoid is de-energized, and pump is running. When solenoid is energized, oil is directed back through valve "return" port and cylinder piston returns. To place cylinder in "hold" position, pump must be stopped or its flow held at the valve "pressure" port with the solenoid de-energized.
NOTE: Valve is equipped with a 9631 snubber valve in port "A." The line from the "return" port of the valve must be unrestricted (7 bar back pressure maximum) back to the reservoir.
IMPORTANT: A 9580 in-line check valve (see page 123) must be installed in the "pressure" port if the supply pump is not equipped with an outlet check valve.
No. 9559 – 3-way/2-position solenoid valve, 115 volt 50/60 Hz. Includes a remote mounting subplate. Wt., 4,4 kg.
No. 9526 – Same as 9559 except for 230 volt, 50/60 Hz.
No. 9556 – Same as 9559 except for 24 volt, 50/60 Hz.
NOTE: Valves above are shipped without control switch. Use 202777 remote hand switch (see page 106).

Valves
HYDRAULIC REMOTE MOUNTED

700 bar,
3/8" ports
19 l / min max flow

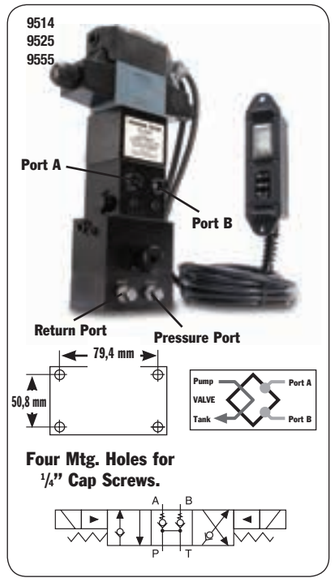

Four Mtg. Holes for 1/4" Cap Screws.

4-way/3-position (tandem center) solenoid valve with Posi-CHeck®
Application: Double-acting cylinders.
Actuation: Solenoid operated, 115 volt, 50/60 Hz.
Functions: Push button control of "advance," "hold" and "return." The "Posi-Check®" feature guards against pressure loss when shifting from "advance" to "hold." With valve in "hold" position, cylinder ports are blocked and oil is directed from pump to reservoir.
NOTE: Do not allow return tank pressure to exceed 35 bar at the valve.
No. 9514 – 4-way/3-position (tandem center) solenoid valve, 115 volt, 50/60 Hz. Remote hand control included. Wt., 4,6 kg.
No. 9525 – Same as 9514 except for 230 volt, 50/60 Hz.
No. 9555 – Same as 9514 except for 24 volt, 50/60 Hz.
NOTE: Consult factory before installing a pressure switch on any of these valves.

⚠ CAUTION: To prevent sudden, uncontrolled descent of a load as it is being lowered, use a No. 9596 Load Lowering Valve or No. 9720 Counter Balance Valve (see page 132) in conjunction with the directional valve used in your application.
⚠ CAUTION: The Posi-Check® feature will not hold the load when shifted directly A to B-B to A or from hold to A or B.

NOTE: Maximum tank line pressure for remote mounted valves is 35 bar.

HYDRAULIC ACCESSORIES

Valves
HYDRAULIC IN-LINE

700 bar,
19 l / min max flow rate



9596

LOAD LOWERING VALVE

Application: Precision metering for controlled cylinder piston return.
Operation: Permits free flow when extending cylinder, built-in pressure relief and "Posi-Check®" locks and holds load in raised position until operator opens valve. May be pre-set to provide consistent metered return, or operator may select rate of return with each actuation. Has 3/8" NPTF ports.
NOTE: Pressure relief valve setting is 830 bar. Operating pressure is 700 bar and max. flow rate is 19 l /min.
No. 9596 – Load lowering valve. Wt., 1 kg.

9597





SEQUENCE VALVE

Application: Used when one cylinder in a multi-cylinder application must advance before any other.
Operation: Pump is connected to port "P" and separate cylinders to ports "A" and "B". When pressure is applied to port "P", cylinder "A" advances. Cylinder "B" will not advance until a predetermined pressure setting is reached in cylinder "A". Pressure setting is adjustable from 35 to 550 bar with adjustment screw; factory preset at 70 bar.
Has 3/8" NPTF ports.
No. 9597 – Pressure control sequencing valve. Wt., 2,5 kg.

9608



⚠ **CAUTION:** Over Pressure control must be set at a higher value than operating pressure.

PRESSURE REDUCING VALVE

Application: Provides complete, independent pressure control to two or more clamping systems operated by a single power source.
Operation: Can be used to provide different pressures in various stages of a single system. Virtually zero leakage across valve means each system can be operated by a single continuous pressure source. Adjustable from 70 to 350 bar at outlet port "B" (secondary).
Has 1/4" NPTF ports.
No. 9608 – Pressure reducing valve. Wt., 2,6 kg.

9720
9721



COUNTER BALANCE VALVE

Application: : Double-acting cylinders. Provides positive holding and controlled, "chatter-free" lowering of a load.
Operation: Load is raised at flow rate of pump, and held when pump is shut off. When the pump is shifted to "retract", the counter balance valve will continue to hold the load until system pressure exceeds pressure caused by load. The load can then be lowered smoothly to the flow rate of the pump. The counter balance valve is designed to operate with pumps having a high pressure flow rate of up to 1,9 l /min. and cylinder ratios of 3 to 1.
No. 9720 – Counter balance valve, including two male and two female half two hydraulic hoses, fittings and dust caps. Wt., 4,5 kg.
No. 9721 – Same as 9720, but does not include couplers, hoses, fittings and dust caps. Wt.,4,2 kg.

⚠ **CAUTION:** The 9720 patented counter balance valve has a pilot pressure as high as 210 bar. Because this pressure is applied to the rod end of the cylinder while it is already under load, the system should not be sized for loads greater than 80% of cylinder rated capacity.

⚠ **CAUTION:** To prevent sudden, uncontrolled descent of a load as it is being lowered, use a No. 9596 Load Lowering Valve or No. 9720 Counter Balance Valve in conjunction with the directional valve used in your application. See above, this page.

Shut-off valve — **9575**
Application: This needle valve permits fine metering of hydraulic oil.
Operation: Can be used for controlling multiple single-acting cylinders.
No. 9575 – Shut off valve with 3/8" NPTF ports. Wt., 0,6 kg.

Check valve — **9580**
Application: Permits flow of hydraulic oil in one direction only.
Operation: Installs right in hydraulic line.
No. 9580 – Check valve with 3/8" NPTF male ends. Wt., 0,2 kg.

Pilot operated check valve — **9581**
Application: For use with open or tandem center valves. Permits free flow of fluid in one direction.
Operation: Flow is blocked in opposite direction until pilot oil pressure is applied. This prevents the loss of pressure if the valve is inadvertently shifted or the pump line is broken. Minimum cracking pressure is 4,1 bar. Required pilot pressure is approximately 16% of checked system pressure.
No. 9581 – Pilot operated check valve with 3/8" NPTF ports. Wt., 1,7 kg.

"In-line" pressure relief valve — **9623**
Application: Single- or double-acting cylinders. For remote locations in a hydraulic circuit where maximum pressure requirements are less than basic overload valve setting in pump.
Operation: Adjustable from 70 to 700 bar. Valve is spring-loaded and direct-acting.
No. 9623 – Pressure relief valve with 3/8" NPTF ports. Wt., 0,9 kg.



Metering valve — **9631**
Application: For systems using large cylinders or extended lengths of hydraulic hose.
Operation: Controls surges by restricting flow if it exceeds 26,5 l / min. When flow subsides, valve reopens automatically. Has 3/8" NPTF male end to thread into return port of system control valve, and a 3/8" NPTF female end, permitting return hose to be directly connected.
No. 9631 – Metering valve. Wt., 0.1 kg.



"In-line" pressure regulator valve — **9633**
Application: Single- or double-acting cylinders. Permits adjusting operating pressures at various values below relief valve setting of pump.
Operation: Regulator valve is easily adjusted to maintain pressures between 20 and 700 bar. Maintains a given pressure setting within 3% over repeated cycles. Flow range is 0,3 l/ min to 23 l / min.
No. 9633 – In-line pressure regulator valve with two 3/8" NPTF inlet ports, one 1/8" NPTF tank port and 1 m drain line kit. Wt., 0,9 kg.
Simply turn the handle clockwise to increase the pressure setting, counter-clockwise to reduce pressure.
Note: 1 m Drain Line Kit is included.

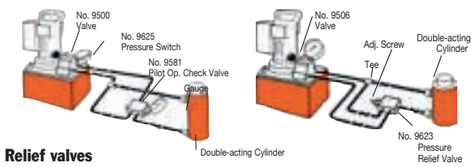

Relief valves
Application: Provide an economical means of protecting an hydraulic circuit against over pressurization.
Operation: These factory preset valves are designed for maximum flow rate of 19 l / min. Furnished with 1/8" NPTF male port. All valves weigh 0.1 kg. See chart to the right for ordering information.

1/8 NPT

RV21278 Series

Valve Order No.	Pressure Setting (bar)	Valve Order No.	Pressure Setting (bar)
RV21278	697/738	RV21278-52	366/407
RV21278-6	41/44	RV21278-55	386/428
RV21278-10	62/69	RV21278-57	400/442
RV21278-15	103/117	RV21278-60	421/462
RV21278-20	131/152	RV21278-65	455/497
RV21278-28	186/207	RV21278-70	490/531
RV21278-30	207/235	RV21278-75	524/566
RV21278-32	214/228	RV21278-80	559/600
RV21278-35	241/262	RV21278-83	580/621
RV21278-40	283/310	RV21278-86	600/642
RV21278-43	304/331	RV21278-88	614/662
RV21278-48	338/366	RV21278-90	628/669
RV21278-50	352/393		

Preset — Non-Serviceable

NOTE: Care should be exercised to protect workers from hot, pressurized hydraulic oil. Install these valves only in an enclosed or shielded area.

SHOP MAINTENANCE

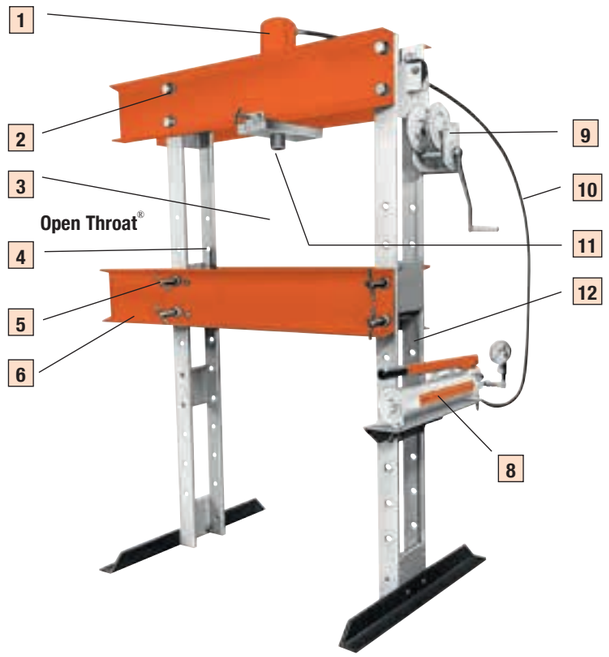

Horizontal pressing capabilities



THE UNIQUE BENEFITS OF THE POWER TEAM PRESS

ALL SHOP PRESSES AVAILABLE IN CE

1 **2 TO 1 SAFETY FACTOR** on hydraulic cylinders and they meet ASME B30.1 standards. Cylinders are easily removed for other applications. Single- or double-acting cylinders are available; built-in relief valve on double-acting cylinders.

2 **FULL RATED CAPACITY** across width of upper frame, even with workhead moved to one side. (Heavy-duty presses only.)

3 **LARGER WORK AREA** than most competitors' models.

4 **ALIGNMENT LEVER** for simple pin replacement after raising or lowering the bed.

5 **CLOSE MANUFACTURING TOLERANCE** allows even load distribution over four alloy steel pins; not two, like some competitors. (Heavy-duty presses only.)

6 **OPEN THROAT® FEATURE** on 25 ton press provides additional work area by mounting cylinder on outside for C-frame advantage.

7 **FRAMES CAN BE USED HORIZONTALLY** for pressing jobs on extra-long shafts (see photo on next page).

8 **ELECTRIC, AIR OR HAND HYDRAULIC PUMPS** are available. All are standard Power Team pumps. **CE approved electric pumps are standard on all presses. Externally adjustable relief valve** for precise operator control of working pressure is standard on all electric pumps except PE10 and PE17 series. **24 volt hand switch** for remote control on pumps equipped with solenoid valves.

9 **ONE-MAN OPERATION** for bed adjustment. Winch unit quickly raises or lowers bed to desired height. Self-locking winch mechanism prevents bed from dropping when handle is released.

10 **9,5 MM I.D. HOSE** on spring return cylinders on heavy-duty presses provides up to six times faster cylinder return than standard 6,4 mm I.D. hose.

11 **FAST CYLINDER APPROACH** to work provided by 2-speed hand, air or electric pumps.

12 **RUGGED UPRIGHTS,** 50 percent stronger than channel iron. Four post design means open side for easy loading of long material.

NOTE: Certain features do not apply to Power Team 10 ton, Roll-Bed, or economy presses.

NOTE: Certain press applications may require guarding. Because of the multitude of possible press uses, it is impossible to design a guard that will meet every customer need. The end user must provide their own guarding where the situations dictate.

IMPORTANT SAFETY INFORMATION:

Power Team has protective blankets available which may afford protection from injury to users and others should part breakage occur. Power Team recommends the use of these blankets for all pushing, pulling, pressing, and lifting applications. See page 217 for additional information.

Page
C FRAME...136

Page
H FRAME...137
25-55 TON

Page
H FRAME...140
100-200 TON

Page
H FRAME ...142
80-200 TON
ROLL BED

Page
ACCESSORIES...144

Page
...146
FLOOR CRANES

Page
...147
LOADROTORS®

Shop Press
C FRAME

25 Tons
Press

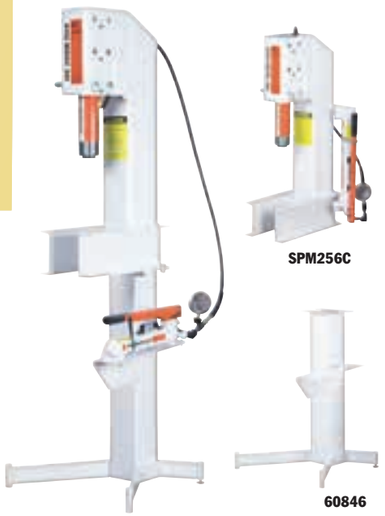

- Can be bench mounted or on optional pedestal base.
- Bench mount requires less than 1.4 sq. m. of space; on optional pedestal, only 4 sq.m. of floor space is needed.
- "Open Throat" design makes loading and unloading of work easy.
- Cylinder head adjusts to three convenient working positions, providing up to 514 mm of "daylight."
- Hydraulic cylinder delivers a 159 mm stroke, is driven by a P59 two-speed hand pump.
- **Pedestal Base No. 60846** – Provides a stable base for SPM256C. Includes a bracket for mounting the pump on the side of pedestal press. Wt., 34,5 kg.

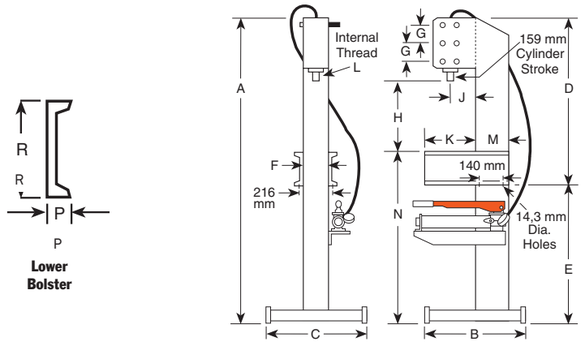

DIMENSIONS

A Space	B	C	D	E	F	G	H (Cyl. Retracted)	J	K	L	M	N	P	R	Floor
1.972	622	610	1.057	914	152	127	260, 387, 514	165	318	1½ – 16	203	1.092	51	178	610 x 622

ORDERING INFORMATION

Capacity (tons)	Type Cyl. Used	Stroke (mm)	Cyl. Model	Order No.	Speed** Advance	Pressing	Type Pump	Pump Model	Prod.Wt. (kg)
25	Single-Acting	159	C256C	**SPM256C***	3,3 mm/stroke	0,8 mm/stroke	Hand	P59	108

* SPM256C does not include No. 60846 pedestal base.
** Typical performance based on pump specifications. Actual speeds may vary with operating conditions.

Shop Press
H FRAME

10 Tons
Bench/Floor Press

- Ideal for small pressing jobs; repairing small motors, armatures, removing and installing gears, bearings, other press-fit parts.
- Bench press has 391 x 457 mm work area; floor press bed height is adjustable from 127 mm to 1.041 mm with horizontal "daylight" of 553 mm.
- Choices of power sources: single-speed hand pump, electric/hydraulic or air/hydraulic.
- Hydraulic gauges, hoses and fittings included.

PUMP ELECTRICAL SPECIFICATIONS
PE10 Series – 220 volt, 50 cycle, single phase.

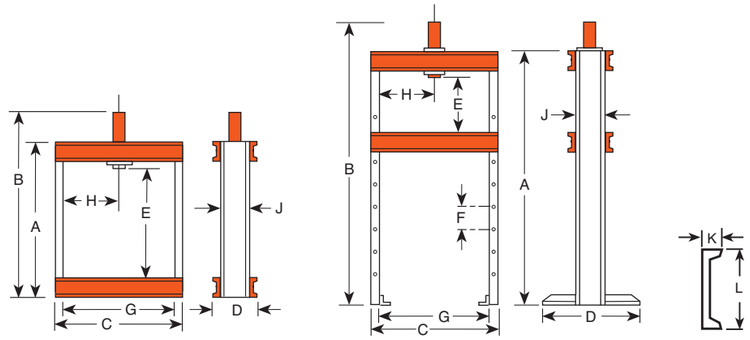

DIMENSIONS

Frame	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	J (mm)	K (mm)	L (mm)	Bench Space (mm)	Floor Space (mm)
Bench	622	841	641	182	391	--	559	279	102	40	102	182 x 641	--
Floor	1.499	1.718	641	711	127-1.041	152	559	63,5-470*	102	40	102	--	711 x 730

*Lateral head movement

ORDERING INFORMATION

Frame	Cap. (tons)	Type of Cyl. Used	Stroke	Cylinder Model	Order No.	Speed (mm./min.)††† Advance	Pressing	Type Pump	Pump Model †	Prod. Wt. (kg)
222481 Bench	10	Single-Acting	257	C1010C	**SPM1010**	1,5 mm/stroke		Hand	P55	41,2
222480 Floor	10	Single-Acting	257	C1010C	**SPH1010**	1,5 mm/stroke		Hand	P55	77,5
222480 Floor	10	Single-Acting	257	C1010C	**SPE1010**	55,7	5,1	Elec. ††	PE172-E220	79,3
222480 Floor	10	Single-Acting	257	C1010C	**SP1010A**	93,7	7,6	Air	PA9H	78,1
222480 Floor	10	Double-Acting	254	RD1010	**SPE1010D**	55,7	5,1	Elec. ††	PE174-E220	87,0

† Optional air/hydraulic pumps available on request.
†† "Advance" position holds pressure with motor shut off. "Return" position advances cylinder with motor running and returns cylinder with motor shut off.
††† Typical performance based on 7 bar and 700 bar pump specifications. Actual speeds may vary with operating conditions.

PRESS ACCESSORIES
Page 144-145

SHOP EQUIPMENT

Press
H FRAME

Open Throat & Economy Press 25 Ton
Presses

OPEN THROAT PRESSES

- Design permits use as both "H" frame and "C" frame press; cylinder can be mounted on frame extension to handle jobs which won't fit between uprights.
- Open throat press models are also available with remote control to enable the operator to view work from all sides with fingertip control of cylinder piston travel.
- Off-center pressing loads of full capacity can be applied across entire width of frame.

ECONOMY PRESSES

- Rugged, yet reasonably priced. Handles many "big press" tasks, and perfect for many of the "in-between" jobs you see almost daily. (Note: stroke length limited to 159 mm on economy models.)

FEATURES OF BOTH OPEN THROAT AND ECONOMY PRESSES

- Press bed height easily adjustable with winch. Bed will not drop when handle is released.
- Choice of power sources for rapid cylinder advance: two-speed hydraulic hand pump, electric/hydraulic or air/hydraulic.

PUMP ELECTRICAL SPECIFICATIONS

PE17 Series – 0,37 KW, 220 volt, 50 cycle, single phase.

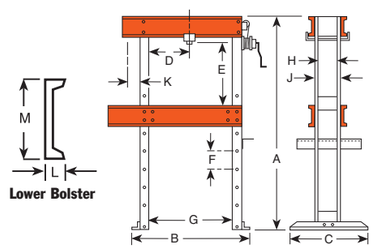

Open Throat feature enables cylinder to be mounted on outside of press frame for fast bearing removal and more.

CE

DIMENSIONS

A (mm)	B (mm)	C (mm)	D* (mm)	E (mm)	F (mm)	G (mm)	H (mm)	J (mm)	K (mm)	L (mm)	M (mm)	Floor Space (mm)
1.727	1.092	711	76-737	175-1.102	114	813	140	165	178	64	203	1.092 x 711

*Lateral head movement

ORDERING INFORMATION

Cap. (tons)	Type of Cylinder Used	Stroke (mm)	Cylinder Model	Order No.	Speed (mm/min.)†† Advance	Speed (mm/min.)†† Pressing	Type Pump	Valve Type	Pump‡ Model	Prod.Wt. (kg)
"Open Throat" presses										
25	Single-Acting	362	C2514C	**SPA2514**	249	30	Air	2-Way Foot	PA6	309
25	Single-Acting	362	C2514C	**SPM2514**	12,4 mm/ stroke	0,8 mm/ stroke	Hand	Load - Release	P159	314
25	Single-Acting	362	C2514C	**SPE2514**	1.184	84	Elec.	2-Way††	PE172-E220	301
25	Single-Acting	362	C2514C	**SPE2514S**	1.321	102	Elec.	3-Way†	PE172S-E220	344
25	Double-Acting	362	RD2514	**SPE2514DS**	1.321	102	Elec.	4-Way†	PE174S-E220	357
"Economy" presses										
25	Single-Acting	159	C256C	**SPA256**	249	30	Air	2-Way Foot	PA6	197
25	Single-Acting	159	C256C	**SPM256**	3,0 mm/ stroke	0,8 mm/ stroke	Hand	Load - Release	P59	205
25	Single-Acting	159	C256C	**SPE256**	1.184	84	Elec.	2-Way††	PE172-E220	210

† Solenoid valve with 12 volt remote control hand switch.
†† Holds pressure with motor shut off. Also has an automatic dump setting. Furnished with a 3.1m remote motor control.
††† Typical performance based on 7 bar and 700 bar pump specifications. Actual speeds may vary under operating conditions.
‡ Pump standard with press. Other Power Team pumps can be substituted.
dBA at idle and 700 bar: PE172–67/81 dBA; measured at 0,9 m distance, all sides.

- Full off-center pressing at full rated capacity across width of upper frame without buckling or bending.
- Maximum "daylight" is 1067 x 914 mm, making positioning of even bulky work pieces easy.
- Height of press bed is easily adjusted with winch; friction brake prevents bed from dropping and handle from spinning upon release.
- Presses with single-acting cylinder offer choice of 2-speed hand operated, electric/ hydraulic, or air/hydraulic pump. Models with double-acting cylinder have an electric/ hydraulic pump.
- Press models equipped with remote control enable operator to view work from all sides with fingertip control of cylinder piston travel.
- Press can be used horizontally for special applications with user-supplied support legs.

PUMP ELECTRICAL SPECIFICATIONS

PE17 Series – 0,4 Kw, 220 volt, 50 cycle, single phase.

CE

Press
H FRAME

55 Ton
Presses

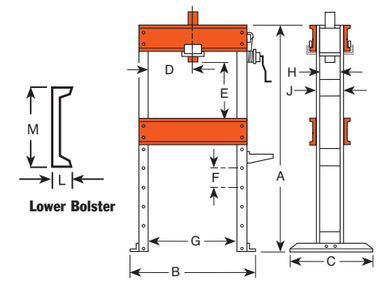



No. SF50 – Straightening fixtures for use with 55-ton shop or 80-ton Roll-Bed® presses (2 ea.). Wt., 47,2 kg. **Not part of press, order separately.**

DIMENSIONS

A (mm)	B (mm)	C (mm)	D* (mm)	E (mm)	F (mm)	G (mm)	H (mm)	J (mm)	L (mm)	M (mm)	Floor Space (mm)
1.829	1.232	914	83-832	152-1.067	152	914	171	203	76	305	1.232 x 914

*Lateral head movement

ORDERING INFORMATION

Cap. (tons)†	Type of Cylinder Used	Stroke (mm)	Cylinder Model	Order No.	Speed (mm/min.)†† Advance	Speed (mm/min.)†† Pressing	Type Pump	Valve Type	Pump‡ Model	Prod.Wt. (kg)
55	Single-Acting	159	C556C	**SPA556**	114	12,7	Air	2-Way Foot	PA6	318
55	Single-Acting	159	C556C	**SPM556**	5,8 mm/ stroke	0,4 mm/ stroke	Hand	Load-Release	P159	323
55	Single-Acting	337	C5513C	**SPM5513**	18,9 mm/ stroke	0,7 mm/ stroke	Hand	2-Way	P460	435
55	Single-Acting	159	C556C	**SPE556**	551	38	Elec.	2-Way††	PE172-E220	333
55	Single-Acting	337	C5513C	**SPE5513**	551	38	Elec.	2-Way††	PE172-E220	444
55	Single-Acting	337	C5513C	**SPE5513S**	620	48	Elec.	3-Way†	PE172S-E220	478
55	Double-Acting	333	RD5513	**SPE5513D**	551	38	Elec.	4-Way	PE174-E220	450
55	Double-Acting	333	RD5513	**SPE5513DS**	1.679	137	Elec.	4-Way†	PE554S-E220	505

* Frame is shipped assembled.
† Solenoid valve with 24 volt remote control hand switch.
†† Holds pressure with motor shut off. Also has an automatic dump setting. Furnished with a 3,1 m remote motor control.
††† Typical performance based on 7 bar and 700 bar pump specifications. Actual speeds may vary with operating conditions.
‡ Pump standard with press. Other Power Team pumps can be substituted. dBA at idle and 700 bar: PE172—67/81; measured at 0,9 m distance,
all sides.

PRESS ACCESSORIES
Page 144-145

H Frame Presses

100 Ton Presses

- Cylinder workhead glides across upper frame on rollers, locks in place for off-center pressing jobs. May be used horizontally for special pressing applications with user-supplied supports.
- Press bed is raised and lowered by winch which locks in place for insertion of bed retaining pins. Upper bolster can be lowered 203 mm for convenient positioning on repetitive jobs.
- Generous "daylight" of 1.067 x 1.270 mm accommodates bulky work pieces, uprights are placed for easy side entry of bars or shafts for straightening or bending.
- Choice of single- or double-acting cylinder. Hydraulic pump options include: 2-speed hand pump with large 7,6 l reservoir, PE172 electric/hydraulic pump or "PQ" series "Quiet" electric/hydraulic pump with low noise level.

Hydraulic gauge and hydraulic fittings are included with presses.



No. SF150 – Straightening fixtures for use with 100-ton shop press and 100-, 150-, and 200-ton RollBed® presses (2 ea.). Wt., 89 kg. **Not part of press, order separately.**

PUMP ELECTRICAL SPECIFICATIONS

PE17 Series – 0,4 KW, 220 volt, 50 cycle, single phase.
PQ120 Series – 2,2 kW, 380 V, 50 cycle, three phase.

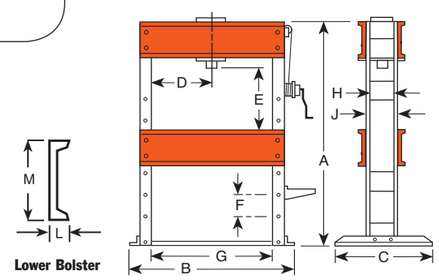

DIMENSIONS

A (mm)	B (mm)	C (mm)	D* (mm)	E (mm)	F (mm)	G (mm)	H (mm)	J (mm)	L (mm)	M (mm)	Floor Space (mm)
1.962	1.626	914	178-1.092	51-1.067	203	1.270	203	254	86	381	914 x 1.988

*Lateral head movement

ORDERING INFORMATION

Cap. (tons)†	Type of Cyl. Used	Stroke (mm)	Cylinder Model	Order No.	Speed (mm/min.)†† Advance	Speed (mm/min.)†† Pressing	Type Pump	Valve Type	Pump‡ Model	Prod. Wt. (kg)
100	Single-Acting	260	C10010C	**SPM10010**	9,0 mm/ stroke	0,3 mm/ stroke	Hand	3-way	P460	769
100	Single-Acting	260	C10010C	**SPE10010**	889	74	Elec.	3-way	PE552-E220	813
100	Single-Acting	260	C10010C	**SPE10010R**	292	20	Elec.	2-way	PE172-E220	766
100	Double-Acting	333	RD10013	**SPE10013DS**	889	147	Elec.	4-way*	PQ1204S-E380	854

† Frame is shipped assembled. *Solenoid valve with 24 volt remote control hand switch.
†† Typical performance based on 7 bar and 700 bar pump specifications. Actual speeds may vary under operating conditions.
‡ Pump standard with press. Other Power Team pumps can be substituted.
dBA at idle and 700 bar: PE172—67/81; PQ120—73/78. Measured at 0,9 m distance, all sides.

H Frame Presses

150-200 Ton Presses

- Standing 2,3 m tall, these giants handle the really big jobs. May be used horizontally for special pressing applications with user-supplied supports.
- Workhead has wide horizontal travel; rugged press frame withstands load of rated capacity across full width of frame.
- Winch mechanism provides easy positioning of press bed, locks in place for insertion of retaining pins. Upper bolster can be lowered 279 mm for convenient positioning on repetitive jobs.
- Uprights are placed for easy side entry of bars or shafts for straightening or bending.
- Fast cylinder approach is provided by PQ1204S "Quiet" electric/hydraulic pump. Has remote control hand switch, enabling operator to view work from all sides with fingertip control of cylinder piston travel.

Hydraulic gauge and hydraulic fittings are included with presses.

PUMP ELECTRICAL SPECIFICATIONS

PQ120 Series – 2,24 KW, 380 volt, 50 cycle, three phase.

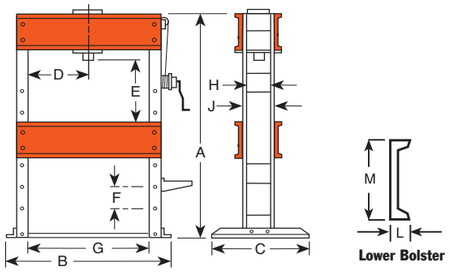

DIMENSIONS

A (mm)	B (mm)	C (mm)	D* (mm)	E (mm)	F (mm)	G (mm)	H (mm)	J (mm)	L (mm)	M (mm)	Floor Space (mm)
2.286	1.803	1,118	279-991	228-1.111	279	1.270	318	381	105	457	1.117 x 1.803

*Lateral head movement

ORDERING INFORMATION

Capacity (tons)†	Type of Cylinder Used	Stroke (mm)	Cylinder Model	Order No.	Speed (mm/min.)†† Advance	Speed (mm/min.)†† Pressing	Type Pump	Valve Type	Pump Model***	Prod. Wt. (kg)
150	Double-Acting	333	RD15013	**SPE15013DS**	610	99	Electric	4-way**	PQ1204S-E380	1.366
200	Double-Acting	333	RD20013	**SPE20013DS**	457	74	Electric	4-way**	PQ1204S-E380	1.484

† Frame is shipped assembled.
†† Typical performance based on 7 bar and 700 bar pump specifications. Actual speeds may vary under operating conditions.
** Solenoid valve with 24 volt remote control hand switch.
*** Pump standard with press. Other Power Team pumps can be substituted. dBA at idle and 700 bar: 73/78, measured at 0,9 m foot distance, all sides.

PRESS ACCESSORIES
Page 144-145

Roll-Bed® Press

80-200 Ton
H Frame

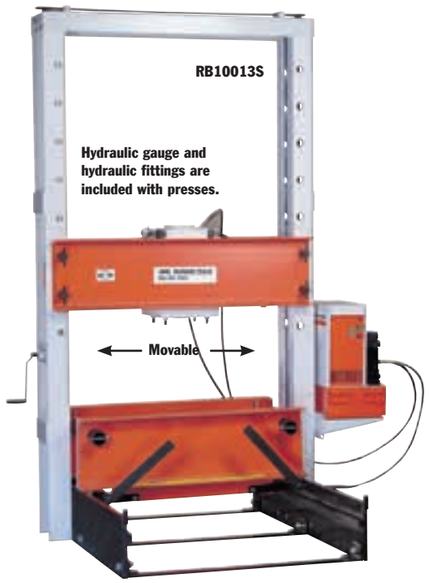

Heavy-Duty Straightening Fixtures

No. SF50 – Fixtures for use with 80-ton Roll-Bed® presses or 55-ton heavy-duty shop presses. (2 ea.). Wt. 47,2 kg. **Not part of press, order separately.**

No. SF150 – Fixtures for use with 100-, 150- and 200-ton Roll-Bed® presses and 100-ton shop presses only (1 pr.). Wt.89 kg. **Not part of press, order separately.**

- The original, patented Roll-Bed® design. Bed rolls out for easy loading and unloading with a crane or other lifting device.
- Movable workhead glides easily side-to-side for full off-center load capacity across width of upper frame.
- "Daylight" is 1.283 x 1.524 mm for 80- and 100-ton models; 1.302 x 1.625 mm on 150- and 200-ton presses.
- Fast approach of double-acting, 334 mm stroke cylinder is provided by PQ1204S "Quiet" electric/ hydraulic pump with remote control hand switch. Operator can view work from all sides with fingertip control of cylinder piston travel.

PRESS FEATURES:

- **Roll-Bed® design** – Bed glides in or out on bearings to make loading and unloading fast and easy.
- Adjustable lower bed width – For secure balancing and centering of heavy jobs. Loosen adjusting bolts to adjust bed from 102 to more than 686 mm. See dimension "H."
- **Movable workhead** – For off-center pressing jobs, workhead moves on bearings across upper bolster. Presses can be used at full capacity, regardless of where workhead is placed.
- **Lifting mechanism** – Simply turn crank handle to raise or lower upper bolster. Screw mechanism raises or lowers both sides evenly (a heavy-duty 1/2" drill motor can replace handle for automatic adjustment). Four locking pins hold bolster in place for pressing.
- **Optional heavy-duty straightening fixtures** – Make straightening jobs easy and accurate to within 0.1 mm! Rollers are ball bearing mounted and handle raises or lowers for easy turning of the work.

PUMP ELECTRICAL SPECIFICATIONS

PQ120 Series – 2,24 KW, 380 volt, 50 cycle, three phase.

NOTE: Different voltage and valve options can be obtained by substituting certain PA, PE or PQ series pumps. Consult the factory.

Lifting screw and locking pins make bolster raising a one-man job.

Bearings make bed positioning smooth and easy.

Lever lowers bed for pressing, raises it for rolling.

Cylinder is easily moved across width of upper bolster.

Width adjusts from 102 mm to over 686 mm; is secured with locking bolts.

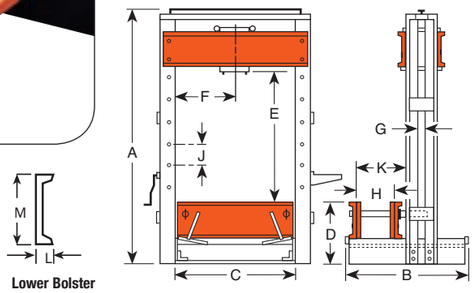

Lower Bolster

DIMENSIONS

Cap (Tons)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	J (mm)	K (mm)	L (mm)	M (mm)	Floor Space (mm)
80	2.861	1.632	1.283	686	305-1.524	368-914	76,2	102-692	203	927	86	381	1.632-1.537
100	2.861	1.632	1.283	686	305-1.524	368-914	76,2	102-692	203	927	86	381	1.632-1.537
150	3.131	1.734	1.302	762	229-1.626	352-949	76,2	102-689	279	946	105	457	1.734-1.607
200	3.131	1.734	1.302	762	229-1.626	352-949	76,2	102-689	279	946	105	457	1.734-1.607

ORDERING INFORMATION

Capacity (tons)†	Type of Cylinder Used	Stroke (mm)	Cylinder Model	Order No.	Speed (mm/min.)†† Advance	Pressing	Type Pump	Valve Type	Pump‡ Model	Prod. Wt. (kg)
80	Double Acting	333	RD8013	**RB8013S**	1.168	190	Elec.	4-way*	PQ1204S-E380	1.307
100	Double Acting	333	RD10013	**RB10013S**	889	147	Elec.	4-way*	PQ1204S-E380	1.334
150	Double Acting	333	RD15013	**RB15013S**	610	99	Elec.	4-way*	PQ1204S-E380	2.019
200	Double Acting	333	RD20013	**RB20013S**	457	74	Elec.	4-way*	PQ1204S-E380	2.059

* Solenoid valve with 24 volt remote control hand switch.
† Frame is shipped assembled.
‡ Pump standard with press. Other Power Team pumps can be substituted. dBA at idle and 700 bar: PQ120-73/78; measured at 0,9 mdistance, all sides.
†† Typical performance based on 7 bar and 700 bar pump specifications. Actual speeds may vary with operating conditions.

PRESS ACCESSORIES
Page 144-145

Rubber Tire Removing/Installing set
Now an easy way to press solid rubber tires. The TPP200 uses plates instead of combination rings to press a rim from an old tire into a new one. Plates are stacked so none is more than 50,8 mm smaller than the one under it to keep the plates from bending. They can be used on any Power Team press with 55-ton capacity or more. NOTE: Many tires require 100 tons of force or more, depending on tire size and condition. These plates withstand max. force of 150 tons.
No. TPP200 – Tire press plate set. Includes 13 press plates, spacer pushing adapter and press bed plate. For use on solid rubber tires from 102 mm to 451 mm I.D.

Set No. TPP200



TBP1622
406 x 559 x 50,8 mm

TPP1 – TPP13
98,4 x 448 x 19,1 mm

TPS6
95,3 x 152,4 mm



Pressing rim into new tire on Power Team Press.

Order No.	Set No. TPP200 Tire Size I.D. (mm)	Plate O.D. (mm)
TPP1	102	98,4
TPP2	127	123,8
TPP3	152,159	149,2
TPP4	165	161,9
TPP5	203	200
TPP6	254	250,8
TPP7	267	263,5
TPP8	286	282,6
TPP9	305,308	301,6
TPP10	356	352,4
TPP11	381	377,8
TPP12	406	403,2
TPP13	451	447,7
TPS6	Spacer/Pushing Adapter	82,6 x 152,4
TBP1622	Bed Plate	406 x 559 x51

PRESS ACCESSORIES, "V" BLOCKS & THREADED ADAPTERS



V-BLOCKS (mm)

Order No.	Width A (mm)	Length B (mm)	Thick C (mm)	Angle D
1890	50,8	228,6	31,8	120°
1891	63,5	292,1	44,5	120°
1892	88,9	355,6	50,8	120°
1893	127	355,6	38,1	120°
207395	146,1	584,2	63,5	120°

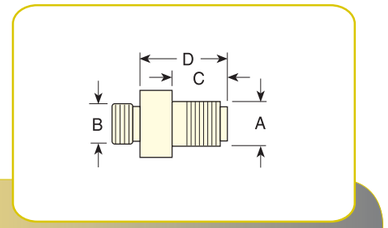

THREADED ADAPTER DIMENSIONS

Adapter No.	A	B	C (mm)	D (mm)
38597	1- 8	1- 8	19,1	33,3
38953	1 1/4 - 7	1 1/2 -16	69,9	111,1
37368	1 5/8 – 5 1/2	–	42,9	63,5
43562	2 1/4 - 12	--	57,2	76,2
38954	1 5/8 – 5 1/2	1 1/2 - 8	82,6	106,4
43563	2 1/4 - 12	2 3/4 -12	57,2	81
46070	2 1/4 - 12	2 – 4 1/2	57,2	81

Press Accessory Kit
Make your Power Team press even more versatile with one of these accessory sets. These sets will eliminate makeshift set-ups. Many of these items can be used with pullers you already have.

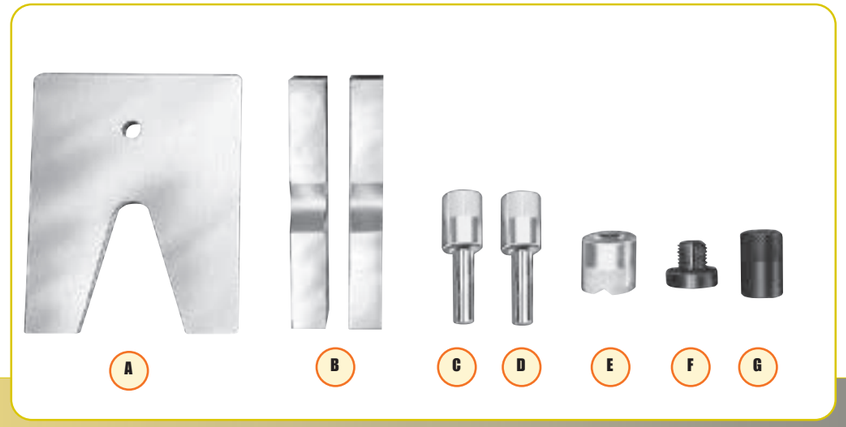

ORDERING INFORMATION

Use	With	A V-Throat Order	B Press	C Pushing ⚠	D Pushing ⚠	E Pushing	F Threaded Adapter V-Pushing	F Threaded Adapter Single-	G Double-
10 Ton	SPA10	1888	1890 (Pr.)	201923 12,7 mm dia. shank	201454 19 mm dia. shank	34806	Included in Set 38597	38597	–
25 Ton	SPA25	1889	1891 (Pr.)	34510 19 mm dia. shank	34511 25,4 mm dia. shank	34807	Included in Set 38953	38953	–
55 Ton	SPA55	–	1892 (Pr.)	34755 25,4 mm dia. shank	34756 31,8 mm dia. shank	34808	Not Included Order Separately 37368	38954	–
80/100 Ton	SPA100	–	1893 **(Pr.)	–	– 43562	36469 43563	Not Included Order Separately 43562 46070 ***	43563 46070	21332
150/200 Ton	SPA200	–	207395 (Pr.)	–	44458 57,1 mm dia. shank	44457	None* –	–	–

* Pushing adapters thread directly into RD15013 and RD20013 cylinders.
** V-blocks, No. 1893, are recommended for use with 80-ton Roll-Bed® press. Not recommended for use with 100-ton Roll-Bed®.
*** For 80-ton Roll-Bed® press.
NOTE: Individual press accessories may be ordered separately.

⚠ **CAUTION: Pushing adapters are designed for use with specific shaft sizes, and depending on the condition of the shaft ends, the adapter may not withstand the full press tonnage. Always use a protective blanket or other suitable guard when pressing.**

Mobile Floor Cranes

1000- 2000 kg

1000 kg and 2000 kg capacity with space-saving fold-away feature

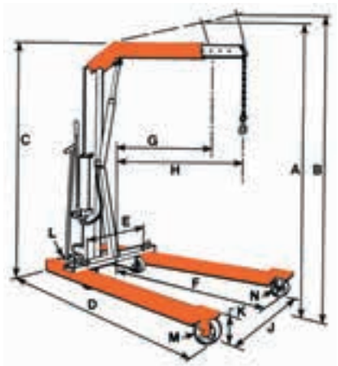

- Adjustable legs spread to clear obstacles, telescoping boom for extra reach. Rugged construction, reliable hydraulics.
- Boom collapses completely and legs fold for compact storage.
- 2-speed hydraulic hand pump provides fast boom travel and precise operator controlled descent.
- Roller bearing wheels and a steering dolly provide ease of mobility. Lifting chain is included.

No. FC4400 – 2000 kg cap. crane with fold-away feature, adj. leg spread, lifting chain and 2-speed hand pump. Wt. 293 kg.

DIMENSIONS

		FC2200*	FC4400*
	Cap., boom ret. (kg)	1.000	2.000
	Cap., boom ext. (kg)	750	1.500
A	Max. boom hgt., ret (mm)	2,718	2.819
B	Max. boom hgt., ext.(mm)	2.972	3.099
C	Overall hgt., boom horiz.(mm)	2.032	2.083
D	Overall length (mm)	2.108	2.261
E	Min. throat width (mm)	610	635
F	Inside leg length (mm)	1.372	1.461
G	Eff. boom reach -ret.(mm)	838	902
H	Eff. boom reach -ext. (mm)	1.219	1.238
J	Inside leg width (mm)	610-914-1.219	660-1.016-1.333
	(3 –position)	**(3 –position)**	
K	Leg height (mm)	203	241
L	Dolly wheel diameter(mm)	127	127
M	Wheel diameter (mm)	152	203
N	Caster diameter (mm)	152	152
	space, folded (mm)	686 x 965	787 x 1.067
	Height, folded (mm)	2.007	2.184

*** Frame shipped unassembled.**

Load-Rotors®

TILTERS

908-2720 kg

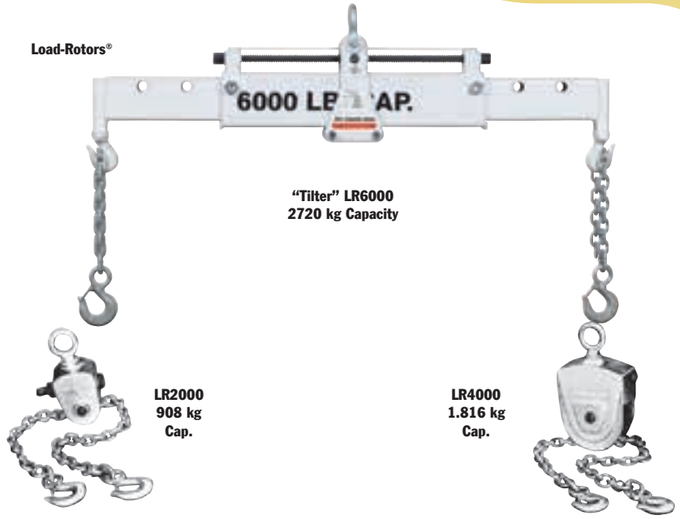

- For lifting or positioning components, Power Team's heavy duty lifting slings are just right.
- The heavy-duty Load-Rotors®, when used with a crane or hoist, greatly reduce time and effort.
- A self-locking worm and gear set in the Load-Rotor® head permits rapid angle adjustment of the component being handled.
- Whenever you have big, heavy components to move or position, nothing helps you get the job done easier and faster than the 2.720 kg "Tilter."



Angle adjustment up to 30° possible



The working length is adjustable in three positions from 762 mm to 1.168 mm. Maximum chain angle is 45°.

ORDERING INFORMATION

Capacity kg	Order No.	Chain Size (mm)	Chain Lg. W/ Swivel Hooks (mm)	Lifting Eye Opening (mm)	Hex Drive End (in)	Gear Ratio	Product Wt. (kg)
908	**LR2000**	6,4	1.422	31,8	5/8	34:1	4,1
1.816	**LR4000**	7,9	1.650	44,5	5/8	82:1	10,4
2.720	**LR6000**	7,9	1.650	41,3	5/8	82:1	33,1

JACKS

Page ...154 **TELESCOPING JACKS BOTTLE JACKS** 6-15 Ton

Page ...155 **SIDEWINDER JACKS** 5-20 Ton

Page **BOTTLE JACKS...150** 2-110 Ton

Page ...156 **MAINTENANCE SETS**

Page ...151 **LOW PROFILE BOTTLE JACKS** 12-30 Ton

Page ...157 **POST TENSION JACKS** 20-30 Ton

Page ...152 **TOE JACKS** $5^1/_2$ - $27^1/_2$ Ton

Page ...158-159 **INFLATABLE JACKS** 1-74 Ton

Page **ECONOMY TOE JACKS...153** 2-10 Ton

Page ...160-163 **PORTABLE HIGH TONNAGE RAILROAD JACKS** 55-150 Ton

Series	Description	Pg	STROKE (MM) 1,1 Ton	2 Ton	3 Ton	3,6 Ton	5 Ton	5,5 Ton	6 Ton	7 Ton	8 Ton	10 Ton	11 Ton	12 Ton	13 Ton	15 Ton	20 Ton	22 Ton	23,8 Ton	27,5 Ton	30 Ton	33 Ton	34 Ton	46,3 Ton	50 Ton	55 Ton	60 Ton	74,6 Ton	100 Ton	110 Ton	150 Ton
	Bottle Jack Std	140		114	114		120				120			149		156	159	156			159	143			171					155	
	Bottle Jack Low Profile	141												95			86				79										
	Toe Jacks Std	142						210					235							233											
	Toe Jacks Economy	143		124			124					149																			
	Bottle Jacks Telescoping	144							305				262		254	181															
	Bottle Jacks Sidewinder	145					19/38					30					30														
SJ	Post Tension/Stressing Jacks	147															216/254				216/254										
IJ	Inflatable Jacks	148	68			119				160				224					305				355	416				521			
PL	High Tonnage Portable Jack RR	150																									355		355		
PM	High Tonnage Portable Jack	152																								333			333		333

Bottle Jacks

2-110 Ton
Portable
hydraulic power

Industrial lifting and pushing applications.

- Choose from this complete line of premium–quality, standard bottle jacks. Ideal for use in any number of industrial lifting and pushing applications.
- The 9110B, 9015B, 9022B and 9033B feature a beveled base which allows the jack to "follow" the load, reducing the chance of dangerous side-loading.
- Many jacks feature screw extensions and all can be used in the vertical, angled or horizontal positions.
- Serrated or contoured saddles help stabilize the load for a safer lift.
- All jacks meet ASME B30.1 standards and carry the Power Team Marathon Lifetime Warranty.
- 110-ton jack features dual pumps for time-saving two-speed operation.

ORDERING INFORMATION

Cap. Tons	Stroke (mm)	Order Number	Retracted Height Min. (mm)	Length of Screw Ext. (mm)	Height w/Screw Ext. (mm)	No. Pump Strokes to Ext. Piston completly	Saddle Dia. (mm)	Base Size (mm)	Pump Handle Length (mm)	Handle Effort at Rated Cap. (kg)	Carry Handle	Metric tons at 700 (bar)	Product Weight (kg)
2	114	**9002A**	181	49	344	5	25	110x65	311	34	No	1,8	2,2
3	114	**9003A**	191	60	365	10	29	114x72	489	20,4	No	2,7	2,6
5	121	**9005A**	200	70	391	12	35	132x76	545	24,9	No	4,5	3,6
8	121	**9008A**	200	70	391	18	38	152x89	605	34	No	7,3	5,5
12	149	**9112A**	241	79	470	26	48	165x106	605	27,2	Yes	10,9	7,9
15	156	**9015B**	230	110	495	27	60	130x140†	700	40,8	No	13,6	8,3
20	159	**9120A**	270	40	429	22	51	183x129	800	31,7	Yes	18,1	12,9
22	156	**9022B**	240	110	505	36	60	165x160†	700	40,8	Yes	20,0	10,7
30	159	**9030A**	279	--	438	35	60	192x141	1.000	22,7	Yes	27,2	18,7
33	143	**9033B**	240	100	483	56	65	184x176†	700	39,9	No	29,9	14,5
50	171	**9050A**	305	--	476	35	76	237x187	1.000	38,6	Yes	45,4	35,4
110	156	**9110B**	300	--	456	40/160‡	111	339x291	700	35,8	Yes	99,8	70

† Comes with a Beveled Base
‡ 2 Speed: Rapid advance≈40 strokes; Lift mode≈160 strokes

Low Profile
BOTTLE JACKS

12, 20 & 30 Ton

The right choice for those lower clearance jobs.

- All the quality, features and lifting capacity of the standard jacks in short form. The 12-ton and 20-ton models feature screw extensions for added versatility.
- All jacks meet ASME B30.1 standards and carry the Power Team Marathon Lifetime Warranty.
- All jacks operate both vertically and horizontally for use in a variety of lifting, pushing and spreading applications.

ORDERING INFORMATION

Product Cap. Tons	Stroke (mm)	Order Number	Retracted Height Min. (mm)	Length of Screw Ext. (mm)	Height w/Screw Ext. (mm)	No. Pump Strokes to Ext. Piston (mm)	Saddle Dia. (mm)	Base Size (mm)	Pump Handle Length (mm)	Handle Effort at Rated Cap. (kg)	Carry Handle	Metric tons at 700 bar	Weight (kg)
12	95	**9012A**	171	76	343	26	48	165x106	605	27	Yes	10,9	6,4
20	86	**9020A**	181	40	305	22	51	183x129	800	32	Yes	18,1	10,1
30	79	**9130A**	181	--	260	35	60	192x141	1.000	23	Yes	27,2	13,7

‡ 2 Speed: Rapid advance≈40 strokes; Lift mode≈160 stroke

Toe Jacks

5.5, 11 & 27.5 Ton

Get under equipment with only 27 mm of ground clearance.

ASME B30.1

- With lifting points on the toe and on the top, these extremely rugged jacks are ideal for machine lifting, rigging, lift truck service and much more.
- Choose from 5.5-ton, 11-ton, and now, an amazing 27.5-ton lifting capacity.
- All jacks operate both vertically and horizontally.
- Base, toe and pumping assembly swivel independently, allowing the jack to work in confined areas.



The J Series Toe Jack is an extremely rugged jack used here for lift truck service.

DIMENSIONS

Order Number	A Ret. (mm)	A Ext. (mm)	B Ret. (mm)	B Ext. (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	J (mm)
J58T	30	238	375	584	368	451	71	56	176	41	130
J109T	30	264	419	654	368	451	76	56	183	64	171
J259T	54	289	505	738	210	756	146	102	267	89	270

ORDERING INFORMATION

Cap. Tons	Max Lift Stroke (mm)	Order Number	Strokes to Extend Piston 25,4 mm	Handle Effort at Max Load (kg)	Carry Handle	Metric tons at 700 bar	Product Wt. (kg)
5½	210	**J58T**	8	38,1	Yes	5,0	19,5
11	235	**J109T**	13	40	Yes	10,0	29
27½	233	**J259T**	21	40	Yes	24,9	92,1

Economy

TOE JACKS

2, 5 & 10 Ton

Just the power you need at a price you can afford.

ASME B30.1

- These bottle jack-style toe jacks are loaded with many of the same features as our standard bottle jacks, but the toe-lift feature and swiveling pump handle socket make them ideal for machinery lifting and positioning.
- An internal pressure relief provides added safety by limiting the jack's lifting capability to the capacity of the toe.
- Spring return is an added feature on the larger jacks.
- Swiveling pump handle assembly available on the 5- and 10-ton models. The swiveling jack assembly allows you to access and pump the unit from numerous positions.

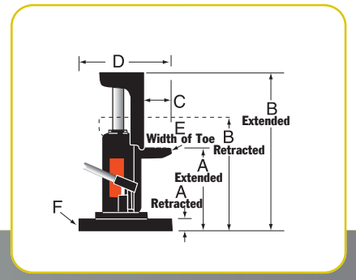

DIMENSIONS

Order Number	A Ret. (mm)	A Ext. (mm)	B Ret. (mm)	B Ext. (mm)	C (mm)	D (mm)	E (mm)	F (mm)
J24T	16	140	232	356	47,5	181	51	125
J55T	25	149	292	476	47,5	257	76,2	184,2
J106T	32	181	327	476	64	292	100	241

ORDERING INFORMATION

Cap. Tons	Max Lift Stroke (mm)	Order Number	Strokes to Extend Piston 25 mm	Handle Effort at Max Load (kg)	Carry Handle	Metric tons at 700 bar	Product Wt. (kg)
2	121	**J24T**	14	19	Yes	1,8	8,3
5	121	**J55T**	22	27	Yes	4,5	24
10	146	**J106T**	31	33	Yes	9,1	38

Bottle Jacks
TELESCOPING

6-15 Ton

These jacks offer greater extended lifting capability.

JACKS

9006X
Beveled BASE

9011X
Beveled BASE

9013X
Beveled BASE

ASME B30.1

- Telescoping jacks offer all of the quality features and capabilities of the standard bottle jack line with a bonus. The super-long stroke of these jacks saves time and effort by eliminating the need to lift, crib, lift, etc. In most applications, the user can place the jack once and complete the lift.
- The 9015X offers very low clearance capability, making it the ideal choice for forklift maintenance or machine lifting.
- The taller 9006X, 9011X and 9013X all feature a unique beveled base that allows the jack to "follow" the load laterally as it is raised, greatly reducing side-loading of the piston.

ORDERING INFORMATION

Cap. Tons	Stroke (mm)	Order Number	Retracted Height Min. (mm)	Length of Screw Ext. (mm)	Height w/Screw Ext. (mm)	No. Pump Strokes to Ext. Piston 25,4 mm	Saddle Dia. (mm)	Base Size Beveled Base (mm)	Pump Handle Length (mm)	Handle Effort at Rated Cap. (kg)	Carry Handle	Metric tons at 700 bar	Product Weight (kg)
6	305	**9006X**	216	--	521	14	44	121 x 133	700	36	No	5,4	6,4
11	262	**9011X**	200	68	530	25	41	160 x 165	700	40	No	10,0	8,8
13	254	**9013X**	230	84	570	35	48	176 x 186	700	36	Yes	11,8	11,3
15	181	**9015X**	170	70	419	32	52	143 x 194	600	43	Yes	13,6	12

Sidewinder Jacks
MINI JACKS

5-20 Ton

Compact Sidewinder Mini Jack fits in your palm and delivers 5, 10 & 20 tons of lifting force.

JACKS

9220A

9210A

9205A

9105A

ASME B30.1

- Retracted height of just 63,5 mm for the smallest jack and 130,2 mm for the 20 ton, allows you to slip this jack into the narrowest of crevices.
- Jacks operate either horizontally or vertically. Handles function in line with base for easier use in confined spaces.
- The perfect addition to any toolbox, this remarkable little jack has multiple uses that are limited only by your imagination. Use it as a jack or a spreader. Use it to turn your mechanical gear puller (puller capacity must match jack capacity) into a hydraulic puller. Use it vertically or horizontally in limited clearance.

ORDERING INFORMATION

Cap. Tons	Stroke (mm)	Order Number	Retracted Height Min. (mm)	Max Height (mm)	No. Pump Strokes to Ext. Piston 25 mm	Saddle Dia. (mm)	Base Size Dia. (mm)	Pump Handle Length (mm)	Handle Effort at Rated Cap. (kg)	Carry Handle	Metric tons at 700 bar	Product Weight (kg)
5	19	**9105A**	63,5	85,7	30	29	73,8	240	26	No	4,5	1,9
5	38	**9205A**	88,9	130,2	38	29	73,8	240	26	No	4,5	2,4
10	30	**9210A**	120,7	149,2	36	42,1	109,9	440	28	No	9,1	5,5
20	30	**9220A**	130,2	160,3	46	52,8	119,9	605	35	No	18,1	8,0

Maintenance Sets

Hydraulic system components

IM10E

IM10H

JACKS

APPLICATION FLEXIBILITY

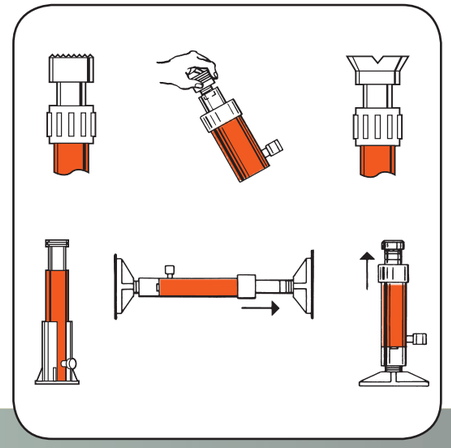

- Matched hydraulic system components, adapters and hydraulic spreader, contained in a rugged carrying and storage case.
- Portable sets are ideal for pushing, pulling, lifting, straightening, or clamping at remote job sites.
- Cylinders in set are rated at 10 tons at 700 bar. Set components are designed for full rated capacity of cylinders.
- Set IM10H includes hand operated pump. Set IM10E includes the Quarter Horse® electrically driven portable power unit.

ORDERING INFORMATION

CONTENTS OF SET Description	NO. IM10E Order No.
Hydraulic spreader	HS2000
Hand pump (electric)	PE102 E220 or E110
700 bar hyd. gauge	9041E
Tee adapter	9670
Hose & coupler assembly	9754E
90° V base	25395
Threaded coupler	25664
Serrated saddle	31772
Flat base	32325
Extension rod – 127mm length	350897
Extension rod – 254 mmlength	38909
Extension rod – 457 mm length	350898
Cyl. support base	420062
Cyl. ass'y, 10 ton, 257 mm stroke	C1010CBT
Cyl. ass'y, 10 ton, 156 mm stroke	C106CBT
Storage box	350722
Prod. Weight – 48,1 kg.	

CONTENTS OF SET Description	NO. IM10H Order No.	NO. IM10L Order No.
Hydraulic spreader	HS2000	HS2000
Hand pump	P59	P59L
700 bar hyd. gauge	9041E	9041E
Tee adapter	9670	9670
Hose & coupler assembly	9754E	9754E
90° V base	25395	25395
Threaded coupler	25664	25664
Serrated saddle	31772	31772
Flat base	32325	32325
Extension rod - 127mm length	350897	350897
Extension rod - 254mm length	38909	38909
Extension rod - 457mm length	350898	350898
Cyl. support base	420062	420062
Cyl. ass'y, 10 ton, 156mm stroke	C106CBT	C106CBT
Storage box	350722	350722
	Prod. Weight 40,4 kg.	Prod. Weight 36,8 kg.

Post Tension

& STRESSING JACKS

20 & 30 Ton

SJ2010
SJ3010

SJ2010DA
SJ3010DA

- Power Team Monostrand Stressing Jacks are the most durable in the industry.
- Ideally suited for work on slab-on-grade where dirt, heat and high volume use take their toll.
- Available in single- or double-acting models.
- Standard single-acting units have a 254 mm stroke. Other stroke lengths are available on special order.
- Dead-end seaters for production work and field work available on special order.
- Service repair is simple; components are long lasting and easily replaced.
- 76,2 mm detachable seater nose assembly easily replaced with optional 152,4 mm nose assembly.
- The jack of choice for high-rise and elevated work, thanks to fast return time and light weight.
- All hydraulic fluid controls are interior designed; more efficient and safer operation during tensioning and retraction.
- Standard double-acting units have an 216 mm stroke; others available on special order.
- Specially designed Power Team Control Valves are available for post tensioning jacks. See pages 51.

JACKS

ORDERING INFORMATION

Description	Cyl. Cap. Tons	Stroke (mm)	Order Number	Recommended Pumps for this Stressing Jack	Oil Capacity (l)	Strand Diameter (mm)	Seater Type	Metric Tons at 700 bar	Weight (kg)
Post tension jack with spring seater, 12,7 mm strand.	20	254	**SJ2010**	PE554T/PE604T	0,72	11,1-12,7	Spring	20,3	25
Post tension jack with power seater, 12,7 mm strand.	20	254	**SJ2010P**	PE604PT	0,72	11,1-12,7	Power	20,3	25
Double-acting post tension jack with power seater, 12,7 mm strand.	20	215	**SJ2010DA**	PE554PT/PE604PT	0,85	11,1-12,7	Power	23,9	19
Post tension jack with spring seater, 15,2 mm strand.	30	254	**SJ3010**	PE554T/PE604T	1	11,1-15,2	Spring	28,5	34,5
Post tension jack with power seater, 15,2 mm strand.	30	254	**SJ3010P**	PE604PT	1	11,1-15,2	Power	28,5	34,5
Double-acting post tension jack with power seater, 15,2 mm strand.	30	215	**SJ3010DA**	PE554PT/PE604PT	1,1	11,1-15,2	Power	36,0	23,5

STRESSING JACK ACCESSORIES AND HOSES–ORDERING INFORMATION

Used with Stressing Jack	76,2 mm Nose Piece	76,2 mm Wedge Seater	152,4 mm Nose Piece	152,4 mm Wedge Seater	9,5 mm Diameter Gripper Set	11,1 mm Diameter Gripper Set	12,7 mm Diameter Gripper Set	15,2 mm Diameter Gripper Set	Replacement Gripper Handle	Gripper Retainer Plate (2 used)
SJ2010	252564	252562	252759	252763	252568	252761	252567	NA	252570	252565
SJ2010P	252564	252562	252759	252763	252568	252761	252567	NA	252570	252565
SJ2010DA	252543	252542	252760	252764	252650	252762	252555	NA	252556	252544
SJ3010	252564	252562	252759	252763	252568	252761	252567	252569	252570	252565
SJ3010P	252564	252562	252759	252763	252568	252761	252567	252569	252570	252565
SJ3010DA	253363	253361	253364	253362	253390	NA	253391	253365	252556	252544

No. 9758E Hose – 3,1 m rubber, wire-braid (2-ply, 2.800 bar burst rating) 3/8" NPTF male hose ends
No. 9763E Hose – 3,1 m rubber, wire-braid (2-ply, 2.800 bar burst rating) 3/8" x 1/4" NPTF male hose ends

TECH DATA
Page 233

Inflatable Jacks

1-74 Ton

The non-skid space-age reinforced inflatable jack is perfect for many applications.

BE SAFE!
- **INSPECT BEFORE AND AFTER EACH USE.**
- **REPLACE IF ANY SIGNS OF DEGRADATION OR WEAR THAT MAY AFFECT SAFETY OR PERFORMANCE.**
- **KEEP THE PRODUCT CLEAN.**
- **STORE PROPERLY.**

- Uninflated jacks are less than 25mm thick, making lifting tasks in small spaces seem routine.
- Constructed of non-conducting, high quality rubber material with multi-layer aramid fiber reinforcement.
- Samples of jacks are pressure tested to 20 bar and cycle tested (10,000 inflate/deflate cycles at 8 bar).
- The controller, shut-off and air hoses are all equipped with an industrial interchange style quick disconnect air coupler. Female half coupler bodies have a locking collar to help the operator avoid accidentally disconnecting the jack while under load.
- The top and bottom surface of the jack has a skid resistant, interlocking pattern to assist in alignment of two jacks being used together.
- Single jack controller with "dead man" control (part no. 350090) can be used individually or in multiples to regulate the number of jacks desired.
- Heavy attachment handles are provided on the two largest jacks for attachment of a rope or hook to help in positioning the jack.
- Inflation hose system is color-coded (red and yellow) for easy recognition when using more than one jack.
- The jacks can be used at ambient temperatures of -20°C to + 50°C



Maximum Effective Lifting Area

All lifting capacities mentioned in the charts are measured at the maximum effective lifting area (A). As the jack is inflated (B), this effective area decreases (C) due to the rounded shape of the jack. Lifting capacity also decreases (see performance chart).

Stack up to two jacks together to increase effective lifting height.

PERFORMANCE

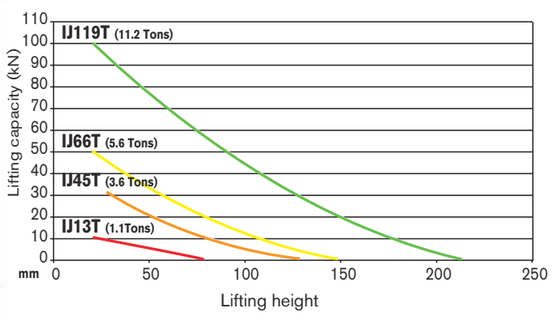

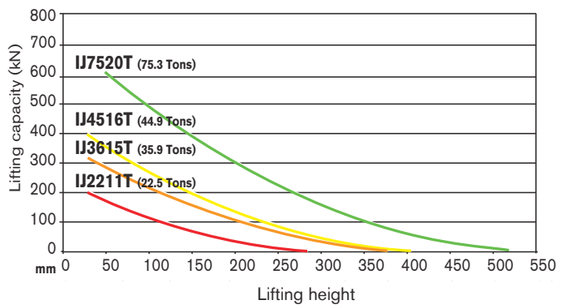

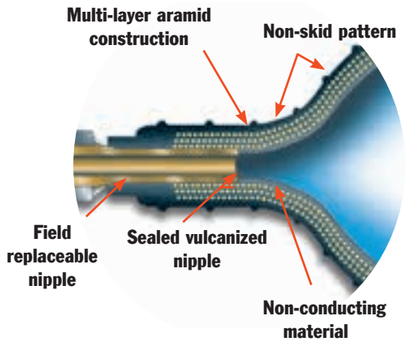

*** NOTE: 350090 air controller may be used individually to control one jack (see single line system), or in multiples to control additional jacks (see dual line system).**

No. 307159 – Pressure reducing valve. Allows use of bottled gases to operate jacks (works on CGA-580 Nitrogen/Argon/Helium bottles). Contains standard bottle fitting on inlet and 1/4" industrial interchange (female) outlet. Wt., 1.8 kg

No. 350090 – Air controller for single jack. Equipped with relief valve and pressure gauge. Wt., 0.9 kg

No. 350207 – Shut-off hose with shut-off valve and pressure relief valve. Includes a female and male quick coupler. Wt., 0.3kg

No. 350208 – Air hose. Red, 9m long. Includes No. 250341 female and No. 250342 male quick coupler. Wt., 2.7kg

No. 350209 – Air hose. Same as 350208, except blue in color. Wt., 2.7kg

No. 250343 – Female quick coupler. 1/4" industrial interchange x 1/8" NPT female. Wt., 0.05kg

No. 250353 – Male quick coupler. 1/4" industrial interchange x 1/8" NPT male. Wt., 0.05kg

No. 250682 – Female quick coupler. 1/4" industrial interchange x 1/4" NPT male. Wt., 0.05kg

No. 15235 – Connector 1/8" NPT male x 1/4" NPT female. Wt., 0.05kg

No. 250341 – Female quick coupler. 1/4" industrial x 3/8" I.D. hose. Wt., 0.23kg

No. 250342 – Male Quick coupler. 3/8" I.D. Hose. Wt., 0.05kg

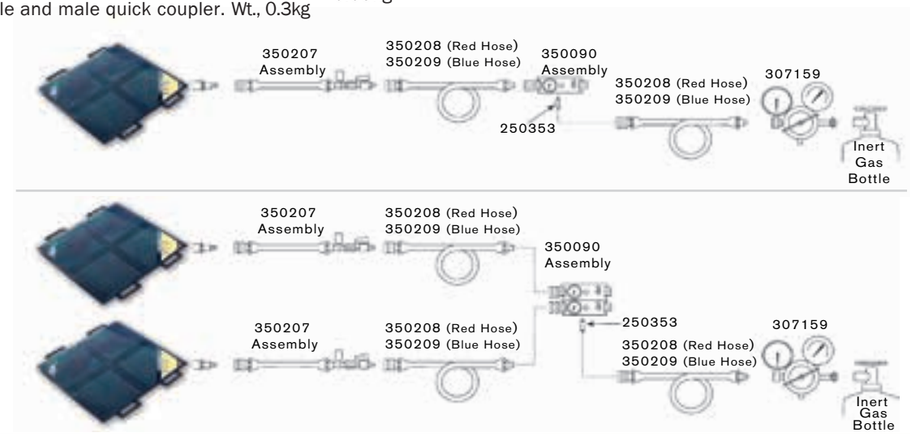

ORDERING INFORMATION*

Lifting Cap. (Metric Tons)	Lifting Height (mm)	Order Number	Air Volume (liter)	Water Volume (liter)	Length (mm)	Width (mm)	Thickness (mm)	Product Weight (kg)
1,0	80	**IJ 13T**	3.3	0.7	150	150	22	0.6
3,3	130	**IJ 45T**	16.2	1.8	228	228	22	1.5
5,1	150	**IJ 66T**	22.5	2.5	270	270	22	2
10,2	215	**IJ 119T**	76.5	8.5	380	380	25	4
20,4	290	**IJ 2211T**	189	21	508	508	25	7
32,7	380	**IJ 3615T**	450	50	658	658	25	13
40,8	405	**IJ 4516T**	558	62	708	708	25	15
68,4	520	**IJ 7520T**	1,206	134	908	908	25	24

*See current price list for shipping weights.

JACKS

Portable
HIGH TONNAGE JACKS

60-100 Ton
Railroad Edition

Portable & compact, ideal for locomotive and railcar maintenance.

- Patented load lowering valve. Lowers load smoothly and safely. Eliminates dangerous chatter and bounce.
- Full range of rod extensions. Jack comes fully equipped with extensions to match lifting pad heights on most rolling stock. Max. lifting height to 1 778 mm .
- Low collapsed height, long stroke. 610 mm collapsed height for low-clearance lift pads.360 mm stroke for maximum lift.
- Adjustable, ergonomic handle. Handle tilts to start the job and is easily locked/unlocked without moving from operating position.
- NEMA 4 electrical box and rain hood. Pump motor and controls protected from water. Quiet operation.
- Cribbing block set with handles and convenient storage rack. Provides solid mechanical load holding.
- High-profile, low rolling resistance, foam-filled tires. Jack can be moved and positioned with minimal effort. No chance of downtime due to punctured tires.
- Electric and air motor options. Quiet, powerful air and electric motor powered units available.

POWER UNIT SPECIFICATIONS

Order No.	Motor	Power Req.	Motor Control	Valve Function	Power Cord	dBa at 700 bar
PLE6014-220	0,84 kW, 220 VAC***, 50 Hz Single Phase	12 amps	6,1 m Remote Control	Lift Hold Lower Manual	Pigtail	80/95
PLA6014	Rotary Air Powered	1,4 cu.m at 6 bar	6,1 m Remote Air Control	Lift Hold Lower Manual	NA	82

*** For 110/115V-50/60 Hz order PLE6014

ORDER INFORMATION

Capacity (Tons)	Stroke (mm)	Order Number	Retracted Height (mm)	Extended Ht. w/Extensions (mm)	Product Wt. Less Cribbing & Ext. (kg)
60	356	***PLE6014K**	610	1.778	237
60	356	***PLA6014K**	610	1.778	237
60	356	***PLE6014K-220**	610	1.778	237
100	356	**Consult Factory**	610	1.499	237

*Includes cribbing block set stored on jack handle rack, and 7 extensions (25,4; 50,8; 76,2; 101,6; 127; 254 and 308 mm)

PLE6014 = Jack, Electric, includes: Cart, Pump & Cylinder
PLE6014-220 = Jack, Electric (220 V.)
PLA6014 = Jack, Air, includes: Cart, Pump & Cylinder
CBS60 = Cribbing Block Set (5 cribbing blocks)
PL60EXT = Extension Set (Consists of 7 extensions)

CRIBBING BLOCKS (CBS60, INCLUDED)

Qty.	Height (mm)	Order Number
1	38,1	**351954**
4	76,2	**351953**

EXTENSIONS (PL60 EXT, INCLUDED)

Extension Length (mm)	Order Number	Extension Weight (kg)
25,4	**351931**	2,2
50,8	**351927**	4,0
76,2	**351928**	6,4
101,6	**351929**	8,7
127	**66053**	9,5
254	**66054**	13,8
508	**66055**	22,1

LIFTING RANGE

Lifting range (in 25,4 mm increments): 610 mm- 1.778 mm.

Only 3 extensions are needed to provide this range.

Do NOT exceed 1.778 mm lifting range on 60-ton unit or 1.499 mm on 100-ton unit.

Portable
HIGH TONNAGE

55, 100 & 150 Ton

Portable and compact, ideal for locomotive/railcar, mining and heavy equipment maintenance.

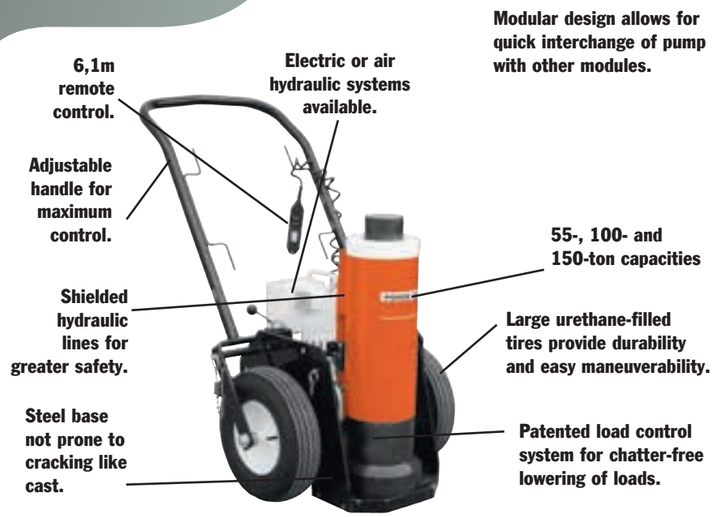

- Modular design - pump and cart separate from cylinder and base.
- Three tonnage capacity options - 55-ton, 100-ton and 150-ton.
- Three collapsed height options – 660, 838 and 1,143 mm.
- Two standard power options - air (PA55) and electric (PE55).
- Two control options - remote motor control and remote valve/motor control.
- Accessory options – 168 mm extension, load-holding rings.
- Select the collapsed height to fit your most frequent application - add jacking modules to suit your needs.
- Remote operation for maximum operator safety and control - choose "motor only" or "motor and valve" control in the hand.
- Easy to maneuver - large tires and small "footprint" make it easy to scoot into the tightest quarters, then locate the exact lifting position.
- Adjustable, heavy-duty handle - makes this jack easy to move, position under vehicles. Can also be used to transport jack on site with a forklift.
- Load-holding rings (optional) - provide full rated mechanical load-holding capability.
- Cylinder extension (optional) - adds more versatility by extending your jack's reach.
- Low-temperature oil (optional) - provides smooth, reliable operation in the coldest climate conditions.
- Modular design - allows you to change lifting modules to suit your tonnage or height requirements. Use the pump module as a portable power station for your other double-acting cylinders (700 bar).
- Exclusive load-control system - provides positive, chatter-free control when lowering the load.
- Shielded and sheltered hydraulic lines - for safer, longer, trouble-free service.

ORDER INFORMATION
CRIBBING BLOCK SETS - INCLUDES ONE JACK MODULE EXTENSION

Order No.‡	55 Ton CBS55		100 Ton CBS100		150 Ton CBS150		200 Ton CBS200	
No. in Set	1	4	1	4	1	4	1	4
A	38,1	76,2	38,1	76,2	38,1	76,2	38,1	76,2
B	44,5	82,5	44,5	82,5	44,5	82,5	44,5	82,5
C	139,7	139,7	139,7	139,7	222,2	222,2	254	254
Jack Module Ext.	173		177,8		168,3		168,3	
Total Stack Ht.	515,9		520,7		512,2		512,2	
Product Wt. (kg.)	16,3		30,9		38,6		47,7	



- Convert jack module into stable mechanical cribbing device.
- Increase retracted height up to 521 mm.



ORDER INFORMATION
JACK MODULE EXTENSIONS

(Tons)	No.	A (mm)	B (mm)	C (mm)	D (mm)	E (in.)	F (mm)	G (mm)	H (mm)	Prod. Wt. (kg)
55	**58945**	223,8	173	127	66,8	1 11/16–8UN	63,5	66,8	92,2	9,5
100	**58943**	228,6	177,8	174,7	98,6	2 3/4–12UN	95,3	98,6	95,3	18,2
150	**58944**	219,2	168,4	203,2	114,3	3 1/4–8UNC	111,3	114,3	88,9	22,7

- Increases jack's reach.

Air pump and cart module.

Electric pump and cart module.

Pump & cart modules

Pump and cart modules contain hydraulic pump, cart, remote control and all hoses and fittings required to connect to a jack module. Contact factory on folding handle cart option.

Remote Control		
Pump	Motor Only	Motor & Valve
Air	PMA55	PMA55S
Electric	Consult Factory	PME55S

Jack modules

Jack modules easily separate from the pump and cart module.

Tonnage	Cylinder Stroke	Collapsed Height mm) 660,4	838,2	1.143
55	333	JM25	JM35	JM45
100	333	JM210	JM310	JM410
150	460	JM215†	JM315	JM415
200	333	JM220*	JM320	JM420

* collapsed height; 711 mm and stroke 333 mm.
† stroke 333 mm.

660 mm Jack Module

838 mm Jack Module

1143 mm Jack Module

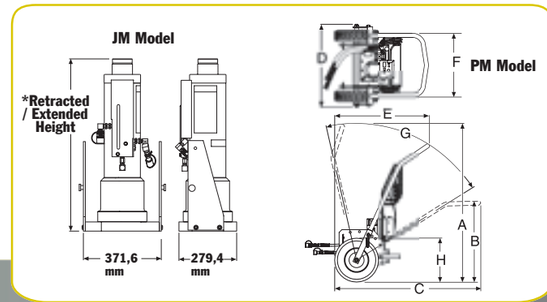

Model Series	Dimensions A	B	C	D	E	F	G	H
PMA & PME	1.464	752	1.353	762	872	594	*70°	406 mm Tire Dia.

* Total range with varying degree increments.

ORDER INFORMATION – Pump and Cart Modules with Assembled Jack Module

Capacity (tons)	Ret. Height (mm)	Ext. Height (mm)	Stroke (mm)	Pump Type	Power Required	Valve Type	Remote Control	Order No.
55	660,4	994	333	Electric	13/25 amps	Manual	M	**JEM5526**
100	838,2	1.172	333	Air	1,4 cu m /min at 6 bar	Manual	M	**JAM10033**
100	838,2	1.172	333	Air	1,4 cu m /min at 6 bar	Air Pilot	M & V	**JAR10033**
150	660,4	994	333	Electric	25 amps	Manual	M	**JEM15026**
150	838,2	1.172	333	Air	1,4 cu m/min at 6 bar	Manual	M	**JAM15033**

JACKS

HYDRAULIC
& MECHANICAL
TOOLS

Page
MOTION CONTROL SYSTEM (MCS)....166
Power Team® Synchronized Lifting and Lowering System

Page
...168
TWHC SERIES
High Cycle

Page
TWLC SERIES...169
Low Clearance

Page
PE 30TWP...171
Electric Torque Wrench Pump

Page
PE 55TWP...172
Electric Torque Wrench Pump

Page
RWP55...173
Pneumatic Torque Wrench Pump

Page
NUT SPLITTER...174
15 and 25 Ton

Page
...175
PIPE FLANGE SPREADER
5 and 10 Ton

Page
...176
SPREADER
1 and 1 1/2 Ton

Page
C CLAMPS...177

Page
BEAD BREAKER...178
Tire Removing Tool

Page
FLS...180
Hydraulic Flange Spreader

Page
...182-183
HYDRAULIC PUNCHES

Page
TESTERS...184
200, 300 and 750 l/min

Page
...185-186
SERVICE ACCESSORIES

Page
...187
RETAINING RING PLIERS

Page
...188
SERVICE TOOLS

Page
...189
WRENCHES & PRY BARS

Motion Control System (MCS)

Power Team® Synchronized Lifting and Lowering System

MCS-PE554-8 shown.

POWER TEAM® SYNCHRONIZED LIFTING AND LOWERING SYSTEM

The Power Team ® Motion Control System provides position control of a load in motion with high precision trough a combination of accurate measurements, digital processing and sophisticated hydraulics. The PLC-controlled system is a combination of digital actuation and digital control providing significant advantages such as time savings, repeatability and extremely low internal stress in the moving object. Synchronized lifting reduces the risk of bending, twisting or tilting due to uneven weight distribution or load-shifts between the lift points.

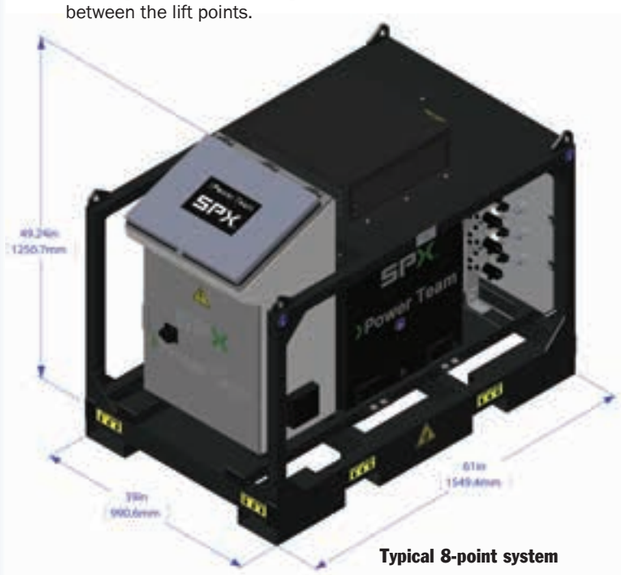

Typical 8-point system

THE SYSTEM CONSISTS OF:

1. PLC controller, pump, and oil reservoir.
2. Displacement sensors to monitor the position of the load.
3. Electrically controlled valves to control the distribution of oil into the hydraulic circuits.
4. Pressure sensors to monitor hydraulic pressures in each hydraulic circuit.

FEATURES:

- Load Capacity: only limited by the choice of cylinders (use with single or double acting cylinders).
- Intuitive graphic, touch screen control.
- Basic systems start at 8 jacking points, also available 16 or 24 points.
- Safety features include: full stop due to power failure, sensor failure, pressure overload, tolerance error, uncontrolled load movement, etc.
- Displayed information includes:
  —Startup diagnostics.
  —Position of lift points relative to starting position.
  —Pressure and load in kN at each lift point.
  —Status of each cylinder.
  —Status of alarms.
- Lifting / lowering accuracy of +/- 1 mm.
- Operating Pressure (up to) 700 bar.
- Standard system has a 151 liter tank.
- Standard system has a PE554 pump unit.
- Suitable for single acting and double acting cylinders.
- Suitable for standard cylinders and telescopic cylinders.

Ordering info: Please contact Power Team for technical support and optimal configuration of your system

Motion Control System (MCS)

Power Team® Synchronized Lifting and Lowering System

TYPICAL MOVING AND WEIGHING APPLICATIONS:

- Bridges
- Oil rig platforms
- Steel structures
- Vessels and heat exchangers
- Stadium roofs
- Ships
- Heavy vehicles
- Buildings

Torque Wrench
HIGH CYCLE

MAX TORQUE 71816 Nm
700 bar

Heavy duty simple-to-use. Accuracy and speed under load. Breaking nuts loose and torquing.

TWHC HIGH CYCLE TORQUE WRENCH

The TWHC Torque Wrenches are designed with the following:

- Designed for high cycle life: 2 to 3x more than existing technology
- Increased reliability: simple drive assembly means less downtime
- Corrosion resistant material used for use in harsh environments
- Compact nose radius allows the tool to fit in tighter, hard-to-reach spaces
- Low weight, high strength design
- Fast operation, long stroke and optimum flow
- Multi-direction high flow swivel manifold
- Push button square drive reversal and reaction arm positioning
- Push-button release of square drive & reaction arm for all models except TWHC50.
- Fully enclosed drive mechanism for operator safety
- Swivel manifold internal relief valve prevents retract side over pressurization
- Fine tooth pawl prevents tool "lockon"

Torque Wrench
LOW CLEARANCE

MAX TORQUE 39024 Nm
700 bar

The lightweight, heavy-duty tool features a long neck, short height, and small radius for inaccessible bolting areas found in industry.

LOW CLEARANCE TORQUE WRENCHES

The TWLC Wrench was designed for the most inaccessible bolting areas found in industry. Its long neck, short height and small radius have all added to its great success

- Low Weight, High Strength Design
- Superior Torsional Strength
- Fast Operation Cycle
- Fine Tooth Pawl
- Floating Piston Design
- Auto-Connect Drive Piston
- Compact Frame Size
- Rigid Steel Body Construction
- Internal SwivelManifold Relief
- Built-in Reaction Pad
- Small Nose Radius
- Tool Free Link Change
- Corrosion Resistant Finish
- Multi-Axis High Flow Swivel Manifold
- Simple Design
- Consistent Torque Output
- Marathon Lifetime Warranty

Air Pump
TORQUE WRENCH PUMP

Air/Hydraulic
700 bar

Faster, quieter and lighter than typical 2-stage portable pumps – the Air/Hydraulic Pump is a constant horsepower pump that provides consistently high hydraulic flow and pressure for faster tool operation. A typical two stage pump flow curve transitions high to low flow around 48 bar. The Air Pump has much higher, smoother flow throughout the pressure curve and the hydraulic flow continually changes based on pressure - making maximum horsepower and flow at all pressures. The largest flow increase is between 69 & 414 bar, where torque wrenches normally operate - dramatically increasing productivity. As a result, tools operate up to twice as fast vs. two-stage pumps, getting tasks done in much less time.

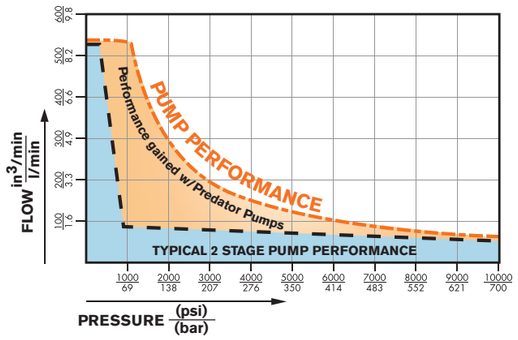

Constantly variable flow also allows continuous operation and eliminates the need for external heat exchangers and cool-off downtime.

The Air pump is designed to be rugged, but light weight for ease of transporting it to a job site. It is engineered for low sound levels to reduce operator fatigue and increase productivity. A roll cage option allows users to customize the Air Pump to suit their needs.

The Pump also comes in an electric/hydraulic model. For a complete high force hydraulic package, Power Team offers a full range of cylinders, tools, and torque wrenches to match the pump hydraulic power source.

Technical Data

REQUIRED AIR PRESSURE
2,3 m3/min à 5,5 bar
2,5 m3/min à 6 bar
2,8 m3/min à 7 bar

MAXIMUM HYDRAULIC PRESSURE OUTPUT
700 bar

SOUND LEVEL
75 dB A

HYDRAULIC OIL RESERVOIR CAPACITY
5,68 l utile min. réservoir standard

HYDRAULIC OIL DELIVERY

	7 bar	6 bar	5,5 bar
50 bar	9,4 l/min	9,3 l/min	8,9 l/min
172 bar	3,8 l/min	3,7 l/min	3,4 l/min
345 bar	1,9 l/min	1,8 l/min	1,7 l/min
700 bar	0,9 l/min	0,9 l/min	0,8 l/min

* Values shown are with filter/regulator/lubricator, values will increase without FRL

SIZE
HEIGHT = 51 cm | WIDTH = 46 cm | LENGTH = 30 cm

WEIGHT
36 kg with 4,7 L hydraulic oil

Features & Benefits
- Quiet operation
- Light weight for easy portability
- Cool operation without add-on heat exchanger
- Rugged construction for durability in tough environments
- Fewer parts for lower service costs
- CE
- ATEX Ex II 2 GDc T4

Part Numbers
PA60APF5FP – standard with handle and guard
PA60APF5FPR-CR – with roll cage

Electric Pump
HYDRAULIC TORQUE WRENCH PUMP

PE30 Series
5 l/min Max Flow
700 bar

VANGUARD® ELECTRIC HYDRAULIC TORQUE WRENCH PUMPS

- Two-speed general duty pump
- External adjustable pressure regulator
- Retract side internal relief valve protects tool
- Hand remote
- Use for double or single acting tools

CE

CAUTION: This system should not be used for lifting applications.

Pump Model	Oil Delivery	Oil Reservoir (l)	Usable Oil (l)	Overall Width (mm)	Overall Length (mm)	Overall Height (mm)	Pump Weight w/Oil (kg)
PE30TWP-E110*	5 l/min. at 7 bar	4,75	4,5	356	331	458	30,9
PE30TWP-E220*	0,5 l/min. at 700 bar	4,75	4,5	356	331	458	33

Electrical Data

	Electric Motor	Electrical Control
PE30TWP	4,000 rpm	24 Volt remote control with 3 m cord
PE30TWP-E110*	0,75 KW, 115V/50Hz, 13 A	
PE30TWP-E220*	0,75 KW220V/50Hz, 7 A	

*CE Approved - designed for 50 Hz applications

PUMP ACCESSORIES Page 116-119
TECH DATA Page 231

Electric Pump
HYDRAULIC TORQUE WRENCH PUMP

PE55 Series
11,5 l/min MAX FLOW
700 bar

VANGUARD® ELECTRIC HYDRAULIC TORQUE WRENCH PUMPS

- Two-speed high performance pump
- External adjustable pressure regulator
- Retract side internal relief valve protects tool
- Hand remote
- Use for double or single acting tools
- Four-tool manifold (-4 model only) allows use of up to four tools simultaneously

⚠ **CAUTION:** This system should not be used for lifting applications.

Pump Model	Oil Delivery (l/min)	Oil Reservoir (l)	Usable Oil (l)	Overall Width (mm)	Overall Length (mm)	Overall Height (mm)	Pump Weight w/Oil (kg)
PE55TWP PE55TWP-E110* PE55TWP-E220*	11,5 at 7 bar 0,9 at 700 bar	9,5	8,4	435	241	460	34
PE55TWP4 PE55TWP4-E110*	11,5 at 7 bar	9,5	8,4	470	241	486	35,4
PE55TWP4-E220*	0,9 at 700 bar						

	Electrical Data	
	Electric Motor	Electrical Control
PE55TWP PE55TWP-E110* PE55TWP-E220*	0,84 KW, 12000 rpm 115V, 25 amps 110V/50Hz, 25 amps 220V/50Hz, 13 amps	Remote control with 3m cord

* CE Approved-designed for 50Hz. applications.

Air Pump
HYDRAULIC TORQUE WRENCH

RWP55 SERIES
Max. flow 7,6 l/min
700 bar

AIR HYDRAULIC TORQUE WRENCH PUMP

- Use where air is the preferred source of power
- Powerful 2,2 Kw motor starts under load
- External adjustable pressure regulator
- Retract side internal relief valve protects tool
- Use for double or single acting tools

⚠ **CAUTION:** This system should not be used for lifting applications.

Pump Model	Oil Delivery (l/min)	Oil Reservoir (l)	Usable Oil (l)	Overall Width (mm)	Overall Length (mm)	Overall Height (mm)	Pump Weight w/Oil (kg)
RWP55	7,6 l/min at 7 bar 0,9 l/min at 700 bar	9,5	8,4	450	280	483	44
RWP55-4 (4-tool manifold)	7,6 l/min at 7 bar 0,9 l/min at 700 bar	9,5	8,4	450	280	483	44

	Motor Data	
	Air Motor	Air Control
	2,25 KW 1,4 m³ / min @ 6 bar	Pneumatic remote control with 3,6 m cord

PUMP ACCESSORIES Page 116-119
TECH DATA Page 231

HYDRAULIC TOOLS

Nut Splitters
HYDRAULIC

15 & 25 Ton Capacity

HYDRAULIC NUT SPLITTERS – 15- & 25-TON CAPACITY

- "Dial-in" feature on HNS150 makes adjustment of splitter simple, without the worry of damaging the bolt
- Specially designed "tool steel" cutter blade penetrates the nut to the precise point where it cracks, stopping short of the bolt threads
- Nut splitter features a dramatically improved cutter blade with an 800% greater resistance to chipping and breaking over previous models
- All models feature a rugged one-piece cutting frame coupled to a heavy-duty hydraulic cylinder
- Compact size allows you to use it in confined areas where it will deliver enough force to split the toughest "fused" or rusted-on grade 2H nuts
- Simply split nut on one side, spin nut splitter 1/2 turn and make second cut on opposite side; nut separates into halves for easy removal

HNS150

HNS225

For HNS150A



FOR HNS150A



FOR HNS150 & HNS225



Align mark on cutter blade with scale.

Tool Model	FOR HNS150 & HNS225 A	B	C	D	E	F	HEAD THICKNESS (mm)	REPLACEMENT BLADE	TOOL WEIGHT (kg)
HNS150	73	86	200	70	264	53	25,4	308840	3,7
HNS150A	77	361	27	54	94	30	25,4	351985	7,2
HNS225	108	153	366	99	C	82	38,1	308022	13,2

CAPACITIES

Tool Model	5 (2 or A)	Nut Grade 9 (5 or B)	10 (8 or C)	12 (2 or H)
HNS150	1/2 - 1-1/2" (12,7-38,1mm) hex	1/2 - 1-1/2" (12,7-38,1mm) hex	1/2 - 1-5/16" (12,7-33mm) hex	1/2 - 1-1/8" (12,7-29mm) hex
HNS150A	1/2 - 1-1/2" (12,7-36mm) hex	1/2 - 1-1/2" (12,7-36mm) hex	1/2 - 1-5/16" (12,7-33mm) hex	1/2 - 1-1/8" (12,7-29mm) hex
HNS225	1-1/8 - 2-1/4" (29-57mm) hex	1-1/8 - 2-1/4" (54-57mm) hex	1-1/8 - 2-1/8" (29-55 mm) hex	1-1/8 - 1-11/16" (29-43mm) hex

Pipe Flange
HYDRAULIC SPREADERS

5 & 10 Ton

HFS3A

- You'll never again have to resort to "hammer and chisel" methods that waste time and effort. Flange spreaders should be used in pairs to provide even spreading force.
- Standard 60° wedge is suitable for most flanges; 30° "thin" and 60° "blunt" wedges are optional.
- The HFS3A is designed for applications where total thickness of flanges and max. spread gap is 76,2 mm or less and flange bolts are a min. of 17,5 mm dia.
- Use HFS6A if total thickness of flanges and max. spread gap is 152,4 mm or less, and flange bolts are a min. of 20,7 mm dia.

350823 350822 350549 350550

Capacity (tons)	Order Number	Standard Wedge Type	Optional Wedges 30° Thin	60° Blunt	Min. Flange Opening (mm) 60° Std.	60° Blunt	30°	Max. Flange Opening (mm) 60° Std.	60° Blunt	30°	Combined Flange Opening (mm)	Max. Pin Dia. (mm)	Weight (kg)
5	HFS3A	60° Sharp	350823	350822	1,6	25,4	1,6	38,1	38,1	18,3	76,2	17,4	4,1
10	HFS6A	60° Sharp	350549	350550	1,6	38,1	1,6	50,8	50,8	24,6	152,4	20,6	8,2

TECH DATA
Page 231

Spreaders
HYDRAULIC

1-1½ Ton

It's a hydraulic pry bar!

HS2000
(Forged Steel)

HS3000
(High Grade
Ductile Iron)

- Use to lift machines or as a clamp; spread concrete forms or rebar or perform straightening jobs.
- Conforms to ASME B30.1 standard.
- High strength alloy steel forged upper and lower jaws on HS2000.
- Jaws are spring-return; retract automatically when pressure is released.

No. HS2000 – 1-ton capacity spreader. Full 908 kg capacity at 700 bar with 102mm spread. Can be "dead-ended" at 102mm spread under full load. Needs only 14,2mm clearance to engage jaws.

No. HS3000 – 1½-ton capacity spreader. Full 1.362 kg capacity at 700 bar with 292 mm spread. Greater than competitive units. Needs only 30,2 mm clearance to engage jaws. Can be "dead-ended" at 292 mm spread at full load.

Tested to conform to ASME B30.1 standard

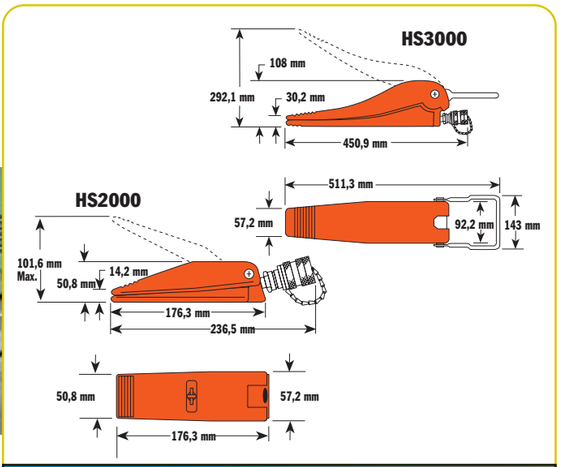

Capacity (tons)	Max. Spread (mm)	Order Number	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	Oil Capacity (cm³)	Min. Clearance Required (mm)	Weight (kg)
1	101,6	**HS2000**	101,6	50,4	14,3	252,52	236,5	50,8	176	57	–	4	14,2	2,2
1½	292	**HS3000**	292	108	30,2	–	451	57,2	511	143	92	20	30.2	10

HS2000 SPECIFICATIONS

Maximum rated capacity.....1 ton at 700 bar
Maximum spread.....101,6 mm
Minimum clearance required.....14,2 mm
Cm³ oil required.....4

HS3000 SPECIFICATIONS

Maximum rated capacity.....1½-ton at 700 bar
Maximum spread.....292 mm
Minimum clearance required.....30,2 mm
Cm³ oil required.....20

C-Clamps
HYDRAULIC

Accessories

"C" CLAMPS

5, 10 & 25 TONS

CC10

- In 5, 10 and 25 ton capacities. For use with Power Team general purpose single-acting series cylinders of comparable capacity.
- For clamping, pressing and bending. Ideal for welding and metal fabrication for fit-up of sheet or plate steel.
- Clamps withstand full rated capacity of the cylinders for which they are intended.
- To minimize the effects of off-center loading, the CC5, CC10 and CC25 should be used with the optional 350144 and 350145 swivel caps.

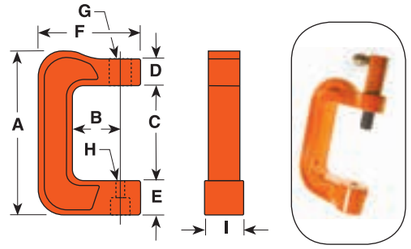

Items pictured at left are:
CC10
C104C
201923

Cap. (tons)	Order Number (C-Clamp only)	Use With Cyl. No.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (in.)	H (mm)	I (mm)	Weight (kg)
5	**CC5**	C51C-C57C	314	95,3	186	50,8	63,5	197	1½"-16 UN	22,2	76,2	11,3
10	**CC10**	C101C-C1010C	403	152,4	240	50,8	85,8	273	2 ¼"-14 UNS	22,2	88,9	20,9
25	**CC25**	C251C-C2514C	533	152,4	319	76,2	114,3	313	3 5/16"-12 UNS	36,5	117,5	41,3

OPTIONAL ACCESSORIES FOR USE WITH CC5, CC10 & CC25 HYDRAULIC CLAMPS

Swivel Caps

10 ton	25 ton
350144*	**350145**
A–35 mm	**A**–50,8 mm
B–19 mm	**B**–25,4 mm

Threaded Adapters



10 ton	25 ton
38597	**38953**
A–1 - 8	**A**–1¼-7
B–1 - 8	**B**–1½-16
C–19 mm	**C**–70 mm
D–50,8 mm	**D**–111 mm

Pushing Adapters



10 ton	25 ton
28228**	**28229****
A–60,3 mm	**A**–73 mm
B–1 - 8	**B**–1¼-7
C–38,1 mm	**C**–44,5 mm

Pushing Adapters



10 ton	25 ton
201923**	**34510****
A–79,4 mm	**A**–82,6 mm
B–57,2 mm	**B**–66,7 mm
C–136,5 mm	**C**–149 mm
D–12,7 mm	**D**–19 mm
E–1 - 8	**E**–1¼-7

Pushing Adapters



10 ton	25 ton
201454**	**34511****
A–79,4 mm	**A**–82,6 mm
B–57,2 mm	**B**–66,7 mm
C–137 mm	**C**–149 mm
D–19 mm	**D**–25,4 mm
E–1 - 8	**E**–1¼-7

V Pushing Adapters

10 ton	25 ton
34806**	**34807****
A–66,7 mm	**A**–79,4 mm
B–1 - 8	**B**–1¼-7
C–38,1 mm	**C**–44,5 mm
D–25,4 mm	**D**–31,8 mm

Pushing Adapters

5 ton
309874*
A–51.6 mm
B–562,8 mm
C–15,9 mm

* May be used with CC5
** Must be used with a threaded adapter.

Tire Removing

BB SERIES TOOL

10 Ton Hydraulic

Unseat tire beads hydraulically on 25” to 49” diameter earth mover rims with pry bar pockets.

HYDRAULIC TOOLS

TIRE REMOVING TOOL

- Made to fit into the pry bar pocket
- Hydraulic pressure does all the unseating.
- Lightweight and portable.
- P55 hydraulic hand pump and 9764 hose recommended to be used with BB1600.

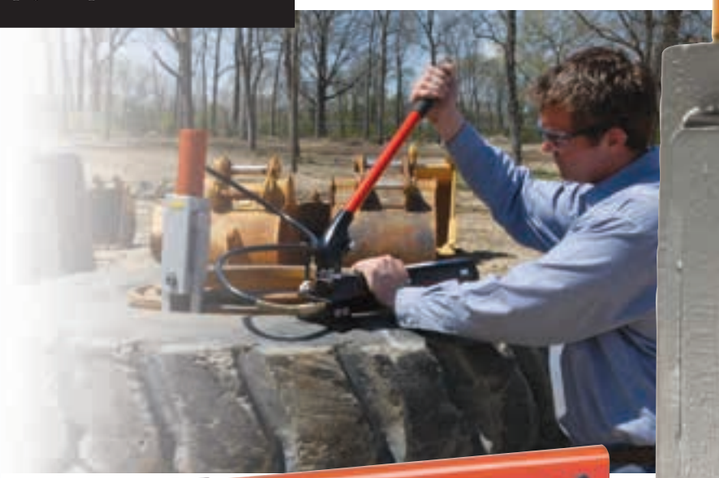

Tool Model	Tool Weight kg.	Rim Size	Cylinder Capacity	Stroke (mm)
BB-1600	10,25	25”–49”	10	101,6
BB1601	10,9	25”–49” Single, two, three piece rims	10	101,6
Contact Factory	13,65	25”–51”	12,3	107,9

POWER TEAM GIVES MUSEUM PROJECT A LIFT

CHALLENGE:

To lower the basement floor by 1.4 meters, removing the basement walls to open up space for the new facilities and street-level entrance and with control and maximum flexibility for a very restricted budget.

SOLUTION:

Using several Power Team hand pumps and sets of cylinders that would be spread out along each beam.
Cylinders were selected that could fit in the very tight gaps available to accommodate the lifting equipment

Basic FLS15 Unit With Serrated Shoes

FEATURES AND BENEFITS:

- 15 Metric Ton Wedge-Driven Spreader
- Jaws Fully Supported by Wedge for Excellent Durability
- Low Friction Provided by Heavy-Duty Extended-Life Lubricant
- Ideal for Flanges With Narrow Gaps - Only 5 mm Required for Entry
- Very High Strength due to Special Alloy Used
- Compact and Lightweight Design - Only 252 mm Long at a Weight of 3.2 kg
- Easy to use - Ergonomically Balanced Handle and Gripping Tape
- Suitable for the Offshore Environment due to Superior Corrosion Resistance
- Quick Adjustments for Various Tasks due to Interchangeable Shoes (Both Stepped and Serrated)
- Easy and Quick Maintenance - No Special Tools Required
- Includes female half coupler - mates to standard 9798 male half coupler.

Max. Spreading Force	Order no.	Tip Clearance	Max. Spread	Type	Oil Capacity	Weight	Operating Pressure
15 ton	FLS15 FLS15-ST	5 mm	10 mm pro Hub	Hydraulic	16 cm^3	3,2 kg	max. 700 bar

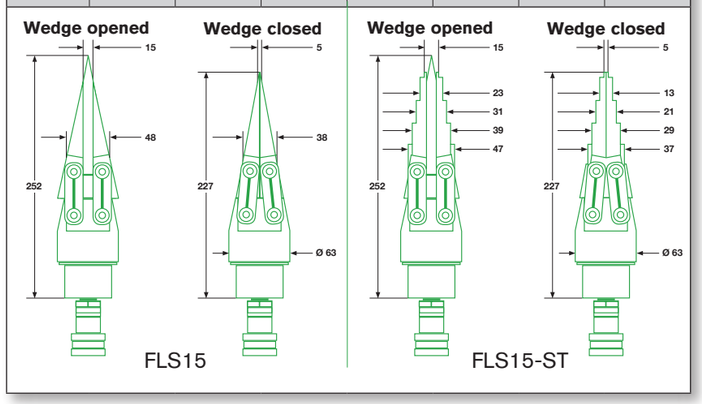

SPEADER KIT*		part number FLS15-FSK	part number FLS15-FSK-ST	part number FLS15-MSK	part number FLS15-MSK-ST
		SPREADERKIT TANDEM, SERRATED	SPREADER KIT TANDEM, STEPPED	SPREADER KIT MAINTENANCE SERRATED	SPREADER KIT MAINTENANCE STEPPED
FLS15	SPREADER, HYDRAULIC	2	-	1	-
FLS15-ST	SPREADER, HYDRAULIC STEPPED	-	2	-	1
SB15	ALUMINIUM HOLDING BLOCK	2	2	1	1
P19L	LIGHTWEIGHT HAND PUMP WITH GAUGE	1	1	-	-
3000827	MANIFOLD, 2 NEEDLE VALVE ASSEMBLY (incl. 2 gauges)	2	2	-	-
2008577	HEAVY DUTY CASE	1	1	-	-
3000832	HEAVY DUTY CASE	-	-	1	1

***Speader kit in various combinations available, all in heavy duty cases; easy to transport and stock.**

HYDRAULIC SPREADER FLS15

This hydraulic spreader operates using the integrated wedge concept. It is ideal for creating space for flange surface cleaning and repair, and for gasket replacement. The spreader is single-acting, and requires a hydraulic pump with a three-way valve for actuation. Maximum operating pressure is 700 bar.

SPREADING FORCE:

Maximum 15 metric tons per tool at 700 bar. It is recommended that the tools be used in pairs, providing a maximum combined force of 30 metric tons.

TYPICAL APPLICATIONS:

- Pipe and flange repair
- Removing elbows
- Couplers - gasket and metal seal Replacement
- Heavy equipment maintenance

"RECOMMENDED COMPONENTS FOR A COMPLETE HYDRAULIC CIRCUIT

Optional handle
Part Number 2008410

Optional Stepped Shoe
Part Number 2008083*

Optional Stepped Block
Part Number SB15 (1 pc)

Note: Part number is for one shoe only.
Two shoes required per spreader.
Two stepped shoes shown.

WE RECOMMEND USE OF THE FOLLOWING POWER TEAM COMPONENTS:

Pump

Coupler

Hose

Gauge

Gauge Adapter

Description	Part Number
Two Speed, Single-Acting Hand Pump	P19L
Hydraulic Hose Assembly	9764E
Pressure Gauge	9040E
Gauge Adapter	9670
Coupler (male half coupler)	9798

Note: Torque wrench tools use smaller couplers. Do not attempt to use torque wrench hoses with this tool.

Hydraulic
PUNCHES
20 & 35 Ton

- Punch smooth, precise holes in seconds; much faster than drilling.
- Fully portable for construction, maintenance and service applications, or can be mounted on a workbench for production jobs. Has carrying handle for precise locating.
- Rugged, forged steel "C" frame for great strength and durability.
- Dual action, spring loaded stripper holds material during punching operation, strips material from punch on return. Scribe lines on stripper aid in locating the punch (HP 35 only).
- Double Acting prevents binding and speeds retraction (HP20 only).
- The PE172 electric/hydraulic pump is an ideal power source.

No. HP35 – Punch only, includes metal case and die change tools. Wt., 19 kg.

No. HP35S – Punch with punches and dies. Includes HP35 punch, metal case and 250459 punch/die set. Wt.,20 kg.

No. HP35P – Punch set with pump. Same as HP35SP, but does not include punch/die set. Wt., 39 kg. NOTE: Available in 220 volt, 50 Hz. Order with suffix "-220".

HP35

No. HP35SP – Punch set with pump. Includes HP35 punch, PE172 electric/hydraulic pump, 9756 hose, 9798 hose half coupler, 250459 punch/die set, metal case. Wt., 40 kg. NOTE: 220 volt, 50 Hz. Order with suffix "-220".

No. 250459 – Punch/die set for round holes. Includes one each: PD437 11,1 mm punch/die, PD562 14,3 mm punch/die, PD688 17,5 mm punch/die, PD812 20,6 mm punch/die. Wt., 0,7 kg.

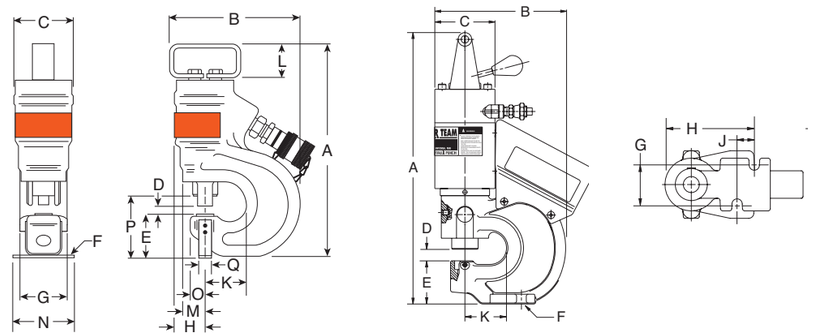

Cap.	Order Number	Max. Oper. Press. (bar)	Oil Cap. (cm³)	Max. Material hickness (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Mtng. Holes F (mm)	G (mm)	H (mm)	Max. Throat Depth J (mm)	K (mm)	L (mm)	M (mm)	N (mm)	O (mm)	P (mm)	Q (mm)
20	**HP20**	700	64	12,7	419	202	93	16	66	14	54	124	24	57	–	–	–	–	–	–
35	**HP35**	700	75	12,7	349	229	95	14	73	6	76	46	–	71	57	38	89	22	102	19

No. HP20 – Basic punch. Wt., 15 kg.

No. HP20S – Punch frame with cylinder, valve, handle, two coupling nuts, plus five punch and die sets in 6,4 7,9 ,9,5 ,11,1 and 13,5mm dia.Wt. 15,9 kg .

No. HP20SP* – Complete punch set with PE102AR pump (115/230V, 50/60 Hz), HP20HS hand switch, 9682 nipple, two 9792 female couplers and two 9793 male couplers. Also includes two 9758 3 m hoses, 9680 coupling, and same punch and die sets as in HP20S (above). Tool is completely assembled and pre-filled with oil. In storage box. Wt., 15,9 kg.

HP20

Punch Set HP20SP
Includes the PE102AR pump, HP20HS hand switch, hoses, couplers, punch and die sets in sizes 6,4, 7,9 ,9,5 ,11,1 , and 13,5 mm diameter, with storage box Wt.15,9 kg.



PUNCH/DIE SETS FOR HP20 & HP35 HYDRAULIC PUNCHES

Punch Size (mm)	Punch Style	For use with HP20 Hydraulic Punch: Punch No.	Flat Die	Bevel Die No.	Coupling Nut No.	For use with HP35 Hyd. Punch: Punch/w Flat Die Set	Punch/w Bevel Die Set
6,4	○ Round	251970		--	252001	--	--
7,9		251971	251983	--	252001	PD313	--
9,5		251972	251984	251996	252001	PD375	PD375B
11,1		251973	251985	251997	252001	PD437	PD437B
13,5		251974	251986	251998	252001	PD531	PD531B
14,3		251975	251987	251999	252001	PD562	PD562B
17,5		251976	251988	--	252001	PD688	--
19,8		251977	251989	--	252002	PD781	--
20,6		251978	251990	--	252002	PD812	--
12,7	□ Square	251979	251991	--	252002	--	--
13,5		251980	251992	--	252002	--	--
6,4 x 19	▭ Obround	251981	251993	--	252002	--	--
9,5 x 19		251982	251994	--	252002	--	--
			251995				

TYPICAL 20 TON STYLE TOOLING

Punch Size (mm)	INCHES Hole Dia.	INCHES Bolt	MM Hole Dia.	MM Bolt
6,4	1/4	#10	6.3	—
8,0	5/16	1/4	7.9	—
9,5	3/8	5/16	9.5	M8
11,1	7/16	3/8	11.2	M10
13,5	17/32	7/16	13.5	M12
14,3	9/16	1/2	14.3	–
17,5	11/16	5/8	17.5	M16
19,8	25/32	–	19.8	M18
20,6	13/16	3/4	20.6	—

HP20FS

HP20HS

252000

TECH DATA
Page 231

ACCESSORIES FOR HP20 HYDRAULIC PUNCH

No. HP20FS – Optional foot switch mounted in foot switch guard. Supplied with 3 m cord and male remote connector. Wt., 0,9 kg.
No. HP20HS – Replacement handswitch. Supplied with 3 m cord and male remote connector. Wt., 0,9 kg.
No. 252000 – Optional coupling nut wrench. Makes punch/die changes easier without "rounding- off" coupling nuts. Wt., 0,3 kg.

Testers
HYDRAULIC

200, 300 and 750 l/min

HT50A

HT200

200 , 300 AND 750 L/MIN IN-LINE HYDRAULIC TESTERS

- Accurately measure oil flow, pressure and temperature on in-plant equipment, forklifts, machine tools and more.
- Temperature and flow readings are in Metric and English, accurate to within ±2% of full scale.
- Dual pressure gauges for high and low pressure readings; low pressure gauge is automatically shut off and protected as pressure rises beyond its maximum reading.
- Automatic pressure compensating feature lets you increase flow without affecting pressure setting.
- Reverse flow through tester will not cause damage; replaceable safety disc ruptures if pressure exceeds upper limit.
- Solid state voltage regulator eliminates errors caused by voltage change during testing.
- Troubleshoots systems with capacities to 750 l/min at pressures less than 350 bar. Accurately measure oil flow to ±5%, pressure to within 2% and temperature readings within 1%.
- Pressure gauge is liquid filled to damp-en system pulsation.

For more precise low pressure readings, an optional dual pressure gauge kit is available (see page 183).

No. HT50A – Hydraulic circuit tester with single liquid filled pressure gauge, 0-5000 psi, 0-350 bar. Includes two adapter unions for 3/4" male NPTF fittings. Wt., 16,8 kg.

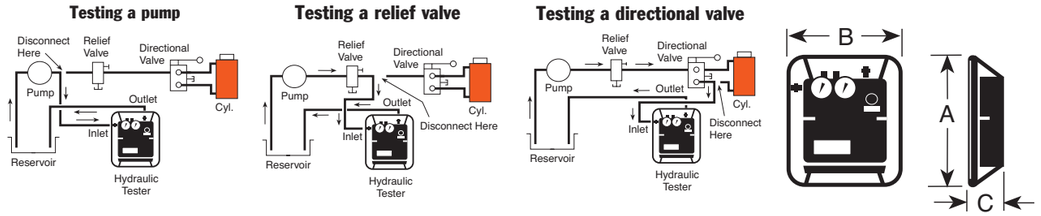

Order Number	Max Flow (l/min)	Scale	Flow Ranges (gpm)	Flow Ranges (l/min)	Max. Oper. Pressure psi	Max. Oper. Pressure (bar)	Temp. Scale Range °F	Temp. Scale Range °C	Port Sizes	Weight lbs.	Weight kg.	A in. (mm)	B in. (mm)	C in. (mm)
HT50A	200	–	0-50	0-200	5,000	345	20-240	-6 to 114	1 1/16-12UN Female "O" Ring with Union Adapt. 3/4" Female NPTF	30.3	16.8	12 1/4 (311)	6 1/4 (159)	10 (255)
HT75	300	High Low	15-75 3-15	50-300 10-60	5,000	345	100-250	40-120	3/4" NPT Swivel	18.2	8.6	13 3/4 (349.25)	11 7/8 (301.62)	5 3/4 (146.05)
HT200	750	High Low	25-200 5-40	100-750 20-150	5,000	345	100-250	40-120	1 1/2"* SAE Split Flange	28.2	13.6	15 7/8 (403.47)	13 1/4 (336.55)	6 3/4 (171.45)

For a complete listing of accessories for the HT series of hydraulic system testers, see pages 193-194.
*Not included, must be ordered separately, see page 194.

Service Accessories
HYDRAULIC TESTER

DUAL GAUGE CONVERSION KIT FOR 50 GPM TESTER.

Provides more precise low pressure readings. Remove pressure gauge block and gauge from tester and replace it with this block. Install high pressure gauge from tester (350 bar) onto this new block.

No. 307281 – Dual gauge conversion kit. Consists of gauge mounting block, pulsation dampener, thermal overload protector, low pressure gauge and gauge protector. Wt. 0,45 kg.

307281

307281 Low pressure gauge calibrated 0-600 psi 0-42 bar.

37045

Auxiliary power cord for use with 300 and 750 l/min testers

No. 37045 – Auxiliary power cord. For use with any 12 or 24 volt battery to remotely power tester. Wt. 0,5 Kg. CAUTION: For use on negative ground systems only.

9785
9786
8987
9788

Hoses

No. 9785 – Hose, 19,1 mm I.D. x 3/4" NPTF male both ends. 3 m length. 155 bar working pressure. (2 req'd on 200 and 300 l/min testers) Wt., 3kg.

The following hose assemblies are all 4-ply spiral wound wire, 3 m long. For use with 750 l/min testers.

No. 9786 – Hose, 25,4 mm I.D. x 11/4" NPT male both ends. Recommended max. flow 340 l/min, with a working pressure of 280 bar. Wt., 6,3 kg.

No. 9787 – Hose, 31,8 mm I.D. x 11/4" NPT male both ends. Recommended max. flow 530 l/min, with a working pressure of 210 bar. Wt., 6,4 kg.

No. 9788 – Hose, 38,1 mm I.D. x 11/2" NPT male both ends. Recommended max. flow 750 l/min, with a working pressure of 175 bar. Wt., 11,4 kg.

203264



Hose reducer bushings

No. 203264 – Consists of two hose reducer bushings, 11/4" NPT female x 11/2" NPT male end. Needed to adapt No. 9786 25,4 mm I.D. hose and No. 9787 31,8 mm I.D. hose to tester. Wt., 1 kg.

Hydraulic Tester
SERVICE ACCESSORIES

Fittings/adapters For the 750 l/min hydraulic tester

Attach to the HT200 hydraulic tester by the use of flanged-head adapters and split flanges, or by a set of female straight adapters.

203154 203155 203156

203017 203003

FLANGED HEAD ADAPTER UNIONS AND SPLIT FLANGE KIT

No. 203154 – Straight flange adapter. 38,1 mm flanged-head to 11/2" NPSM female swivel. Wt.,1 kg.
No. 203155 – 45° flange adapter. 38,1 mm flanged-head by 11/2" NPSM female swivel. Wt., 1,5 kg.
No. 203156 – 90° flange adapter. 38,1 mm flanged-head by 11/2" NPSM female swivel. Wt., 1,9 kg.
No. 203017 – Split flange kit. Consists of four flange halves and attaching bolts to permit use of 38,1 mm I.D. flange adapters listed at left. Wt., 1.3 kg.



FEMALE STRAIGHT FLANGE ADAPTER

No. 203003 – Consists of two female straight flange adapters with attaching bolts. When attached to inlet/outlet ports, allows connection of 11/2" NPT male hose ends to tester. Wt., 3.9 kg.

HYDRAULIC TOOLS

HYDRAULIC FITTINGS FOR USE WITH ALL TESTERS.

	No. 16954 – 90° swivel adapter, 3/4" NPTF male x 3/4" NPSM female. Wt., 0.4 kg.		**No. 26073** – Swivel adapter, 3/4" NPTF female x 1/2" NPSM female. Wt., 0.1 kg.
	No. 22041 – Coupler, 3/4" NPTF male x 3/4"–16 female ORB. Wt., 0.2kg.		**No. 26074** – 45° swivel adapter, 3/4" NPSM female x 3/4" NPTF male. Wt., 0.3kg.
	No. 22042 – Coupler, 3/4" –16 female ORB x 1 1/16"–12 female 37° JIC. Wt., 0.2kg.		**No. 26075** – Swivel adapter, 3/4" NPSM female x 3/4" NPTF female. Wt., 0.2 kg.
	No. 22043 – Coupler, 3/4" –16 female ORB x 9/16"–18 female 37° JIC. Wt.,0,2kg.		**No. 26076** – Swivel adapter, 3/4" NPTF male x 3/4" NPSM female. Wt., 0.2kg.
	No. 22044 – Coupler, 3/4" –16 female ORB x 1/2"– 20 female 37° JIC. Wt., 0,2 kg.		**No. 26077** – Cap, 3/4" NPTF. Wt., 0.3kg.
	**No. 27737** – Swivel adapter, 3/4" –16 male x 3/4" NPSM female. For use with No. 9785 hose, which has 3/4" NPTF male thread. Wt., 0.1kg.		**No. 26078** – Plug, 3/4" NPTF. Wt., 0.1 kg.
	**No. 27287** – Coupler, 3/4" –16 UNF female ORB x 7/8"–14 UNF female 37° JIC. Wt., 0.2kg		**No. 26079** – Adapter, 3/4" NPTF female x 1 1/16" –12 male ORB. Wt., 0.2 kg.
	**No. 13449** – Cap, 1 1/16"–12 UNF female, 3/4" O.D. tube, 37° flare. Wt., 0.1kg.		**No. 208402** – 45° union adapter, 7/8"–14 UNF male 37° JIC x 3/4" NPTF female. 210 bar working pressure. Wt., 0,3 kg.
	**No. 26068** – 45° swivel adapter, 1" NPTF male x 3/4" NPSM female. Wt., 0,4 kg.		**No. 208401** – 45° union adapter, 7/8"–14 UNF male 37° JIC x 3/4" NPTF female. Wt., 0,4kg.
	**No. 26069** – Swivel adapter, 1" NPTF female x 3/4" NPSM female. Wt., 0.2 kg.		**No. 206753** – Coupler, 1 15/16"–12 UNF female 37° JIC x 3/4" NPTF female. Wt., 0,5 kg.
	No. 26070 – Adapter, 1" NPTF male x 3/4" NPTF female. Wt., 0.1kg.		**No. 26666** – Connector, 1 5/16"–12 UNF male 37° JIC x 3/4" NPTF male. Wt., 0.2 kg.
	**No. 26071** – Service tee, 3/4" NPTF female (2) x 3/4" NPTF male. Wt., 0.4 kg.		**No. 28984** – Straight adapter, 3/4" NPTF female x 1 3/16" –12 UN male 37° JIC. Wt., 0.3 kg.
	**No. 26072** – Swivel adapter, 3/4" NPSM female x 1/2" NPTF male. Wt., 0,2kg.		**No. 28985** – Straight adapter union, 1 3/16"–12 UN female 37° JIC x 3/4" NPTF female. Wt., 0,6 kg.

NOTE: The recommended maximum working pressure on the above fittings is 5,000 psi except the 208402.

Retaining Ring
PLIERS

Internal and External

7313

714
Fed. Spec.:
GGG-P-480

HORSESHOE LOCK RING PLIER

- For removing horseshoe lock rings used on hydraulic brakes, differentials, etc. Plier is 203mm long; max. spread: 23,8mm

No. 714 – Horseshoe lock ring plier. Wt., 0.2 kg.
No. 7313 – External snap ring plier easily removes snap rings used to retain bearings on shafts. Max. spread: 27mm.

RETAINING RING PLIER KITS

- Choose from four sets; internal ring, external ring and convertible pliers for either internal or external rings.

No. 7053K – Replaceable tip pliers kit. This versatile kit contains (1) internal and (1) external pliers with (8) tip sets. Two sets each: 0,9 mm dia. 90° bend, 1,2 mm dia. straight, 1,2 mm dia. 90° bend, 1,8mm dia. straight. Recommended for 6,4 –51 mm rings. Packaged in plastic storage case.
Wt., 0.3 kg.

No. 15702 – Replaceable tip kit (only) for No. 7053K.
No. 7123K – Convertible pliers kit. Contains **No. 1120** (1mm dia./straight tip) and No. 1340 (1,8mm dia./ straight tip). Each pliers "converts" to handle both internal and external rings. Packaged in a reusable plastic storage case. Wt., 0,4Kg.
No. 7125K – Convertible pliers kit. Contains **No. 1125** (1 mm dia./45° bent tip) and No. 1345 (1,8 mm dia./45° bent tip). Each pliers "converts" to handle both internal and external rings. Packaged in a reusable plastic storage case. Wt., 0.4kg.
No. 7406K – Professional pliers kit. Contains (6) retaining convertible pliers to handle both internal and external rings from 6,4–51 mm. Includes straight and 90° off-set pliers with 1, 1,2, and 1,8 mm tip diameters. Includes Nos. 1120, 1131, 1320, 1329, 1340 and 1349. Packaged in an impact resistant storage case. Wt., 0,9 kg.

REPLACEMENT TIPS FOR 7300 AND 7301 PLIERS

No. 209201 – Replacement tips (pr.) for the 7300 and 7301 pliers.
Wt., 0.1 kg.

7053K internal & external plier, 4 sizes of tips.

7123K

7406K

RETAINING RING PLIERS SELECTION GUIDE

Plier No	Tip .Bend	Tip Size Dia. (mm)	For Int'l Rings* Bore Dia. (mm)	For External Rings* Shaft Dia. (mm)
0100	Str.	1	9,5 – 26	--
0200	Str.	1	--	6,4 – 22
0300	Str.	1,8	27 – 44,5	--
0400	Str.	1,8	--	24 – 36,5
0500	Str.	2,3	46 – 89	--
0600	Str.	2,9	--	38 – 89
7300	Str.	3	78 – 152	--
7301	Str.	3	--	38 – 165
Convertible Pliers				
1120	Str.	1	9,5 – 14	6,4 – 17
1125	45°	1	9,5 – 14	6,4 – 17
1131	90°	1	9,5 – 14	6,4 – 17
1320	Str.	1,2	16 – 26	17 – 22
1329	90°	1,2	16– 26	17 – 22
1340	Str.	1,8	27 – 44,5	24 – 36,5
1345	45°	1,8	27 – 44,5	24 –36,5
1349	90°	1,8	27 – 44,5	24 – 36,5

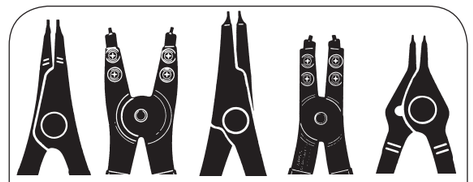

External		Internal		Convertible
No. 0200	No. 7301	No. 0100	No. 7300	No. 1120
No. 0400		No. 0300		No. 1320
No. 0600		No. 0500		No. 1340
				No. 1125*
				No. 1345*
				No. 1131**
				No. 1329**
				No. 1349**

Fed. Spec.: GGG-P-480-E
* 45° Angled Tips ** 90° Angled Tips

Always wear safety goggles when using pliers
*Capacities are shown for basic style rings.

MECHANICAL TOOLS

Service Tools
ACCESSORIES

3344A

PHOTO TACHOMETER

- Infrared light source, micro-processor controlled crystal display.
- Strong magnetic base is included.

Machine speed: It is critical for proper machining operations. Speeds too fast or too slow can shorten tool life and cause expensive, unnecessary machine downtime. This digital photo tach can take readings from revolving shafts on drill presses, grinders, lathes and other machines. It can also be used to check engine operation on in-plant vehicles like forklifts. The 3344A is accurate to within ± 1 rpm. The 10mm high liquid crystal display is easily visible even in high ambient light areas.

No. 3344A – Digital Photo Tachometer. With memory, photo probe assembly, magnetic base, 2,75 m of reflective tape and plastic case. Wt., 2 kg.

No. 39811 – Replacement magnetic base assembly. Wt. 0,1kg.

No. 45329 – Replacement photo probe assembly. Wt., 0.2 kg.

No. 204666 – Replacement retro-reflective indicator tape, 2,75 m long x 12,7mm wide. Wt., 0.1 kg.

SPECIFICATIONS

Readout: Liquid crystal display: 4 (10mm high) digits, low battery indicator, memory mode indicator, high and low RPM memory mode indicator.
Range: 200 to 9999 rpm. Accuracy: ± .25%, ± 1 rpm. Update time: 3/4 second.
Power switch: Membrane switch (automatic shut-off after one minute of no signal input).
Power source: 9 volt alkaline battery. Light source: Infrared with 4,6m plug-in cable.
Light holder assembly: 13,6 kg rated magnet; 50,8 mm dia. x 6,4 mm high (102 mm high overall with post).
Size: 86 w, 152 h x 38 mm d.
Carrying case: 343 w, 254 h x 102 mm d.

HTS50 HEAVY-DUTY PIPE SEALANT WITH TEFLON®

- Seals new or damaged threads; resists water, chemicals and oils.
- Replaces conventional tape methods; forms a clog-free seal. Effective at 700 bar.

When "plumbing" a hydraulic system, there's now a better answer than tapes which can tear or shred, possibly plugging filters, valves or gauges. This compound combines the lubricating qualities of Teflon® with a fast curing anaerobic sealant. Seals all metal fittings, plugs and threaded joints quickly and easily. Cures to form a permanent seal which is inert to hydrocarbons, most acids, chemicals, solvents and steam. Allows adjustment up to 16 hours after assembly; cannot loosen under vibration. Prevents galling of mating parts upon disassembly. Withstands temperatures from -54° to + 190° C.

No. HTS50 – Sealant, 50 ml. tube. Wt., 0.2 kg.

(Teflon® is a registered trademark of duPont Co.)

HTS50

"O" RING SEAL PICKS

Even the seemingly simple job of removing and installing "O" ring seals can be difficult without the aid of the proper tool. The 7312 all metal "O" ring seal pick does the job with ease. Two special picks in set No. 7103 get right to the trouble areas.

No. 7312 – "O" ring seal pick. Wt., 0.1 kg.

No. 7103 – Set of two "O" ring seal picks. Wt., 0.1 kg.

7312

7103

UNIVERSAL OUTSIDE THREAD CHASER

Restore damaged threads on shafts, housings, cages, etc., for re-assembly of matching parts. Eliminates need for thread-cutting equipment. Will not harm threads. V-pads and dies can be replaced. Cap. 32 to 127 mm O.D.

No. 7402 – Thread chaser, complete (with 6 dies: threads per inch – 4, 5, 6, 7, 7½, 8, 9, 10, 11, 11½, 12, 14, 16, 18, 20 and 24). Wt., 0,2 kg.

No. 202817 – Metric die set (3 dies: mm per thread: 1, 1¼, 1½, 1¾, 2, 2½, 3, 3½, and 4). Wt., 0.1 kg.

7402

MAGNETIC PICK-UP TOOL

Has permanent magnetic head for retrieving parts from otherwise inaccessible places.

No. 7395 – Pick-up tool with pocket clip. 152 mm lg. Wt., 0.1 kg.

7395

Wrenches
AND PRY BARS

RATCHETING CHAIN WRENCHES

Special head design allows you to turn wrench in either direction. Ratcheting action makes it possible to re-grip without removal. For parts of most any size and shape.

No. 7400 – Chain wrench, cap. 12,7 to 121 mm O.D. (Capacity= 450 Nm) Wt., 0,9kg

No. 7401 – Chain wrench, cap. 76 to 171 mm O.D. (Capacity= 900 Nm) Wt., 2,3 kg.

No. 209199 – Replacement chain with pin for No. 7400 chain wrench (406 mm long).

No. 209200 – Replacement chain with pin for No. 7401 chain wrench (610 mm long).

ADJUSTABLE HOOK SPANNER WRENCH

Needed wherever turret adjusting nuts or packing gland nuts are used. Cap.: 38 to 102 mm. Handle overall length: 483 mm.

No. 885 – Adjustable hook spanner wrench. Wt., 1,4 kg.

ADJUSTABLE HOOK SPANNER WRENCHES

Replace many fixed-size wrenches... cover range of capacities needed to service industrial tractors and other equipment. Drop-forged jaws adjust to eleven positions for a capacity of 121 to 324 mm O.D. Handle overall length: 610 mm; diameter: 25,4 mm.

No. 7307 – Spanner wrench with one 9,5 mm thick jaw. Wt., 3,3 kg.

No. 7308 – Spanner wrench with two interchangeable jaws: one 9,5 mm thick, one 19 mm thick. Wt., 5 kg

HEAVY-DUTY ADJUSTABLE SPANNER

Extra heavy construction. Has one 19 mm thick, eleven-position hook-jaw for a capacity of 131 to 324 mm O.D. Drop-forged. Handle length: 654 mm; handle dia.: 33.3 mm

No. 7309 – Heavy duty adjustable hook spanner wrench. Wt., 5 kg.

ADJUSTABLE GLAND NUT WRENCH

Designed to handle 51 to 152 mm dia. hydraulic cylinder gland nuts on many construction vehicles. Fits 6,4 and 7,9 mm dia. pin holes; features a 3/4" sq. drive.

No. 1266 – Adjustable gland nut wrench. Wt., 1,4 kg.

No. 204928 – Replacement pin for No. 1266

PRY BARS

Our rolling head pry bars are an extremely popular and useful tool. Head may be used for almost any prying job since a great deal of leverage can be obtained. Long tapered body may be used as a lining-up drift.

No. 7162 – Pry bar; 9,5 mm round, 152 mm long. Wt., 0,1 kg.

No. 7163 – Pry bar; 11,1 mm round, 305 mm long. Wt., 0,3 kg.

No. 7164 – Pry bar; 14,3 mm round, 406 mm long. Wt., 0,5 kg.

No. 7165 – Pry bar; 19 mm round, 457 mm long. Wt., 1 kg.

JIMMY BARS

Ideal for general lifting or prying. Heat treated chrome alloy steel to resist bending or breaking.

No. 7166 – Jimmy bar; 15,9 mm round, 457 mm long. Wt., 0,6 kg.

No. 7167 – Jimmy bar; 19 mm round, 610mm long. Wt., 1,1 kg.

No. 7168 – Jimmy bar; 22,2 mm round, 762 mm long. Wt., 1 kg.

"MAJOR PERSUADER" JIMMY BARS

Two big jimmy bars for big jobs. Forged from chrome alloy steel.

No. 7420 – Jimmy bar; 22,2 mm round, 1.168 mm long. Wt., 3,4 kg.

No. 7421 – Jimmy bar; 25,4 mm round, 1.372 mm long. Wt., 1,9 kg.

PULLERS

Page ...192 PULLER BASICS

Page ...196 POSI-LOCK PULLERS

Page ...200 MECHANICAL JAW PULLERS

Page ...202 MECHANICAL PUSH PULLERS

Page ...204 PULLING ATTACHMENTS

Page ...206 PULLING SLIDE HAMMER

Page PULLER SETS...208

Page ADAPTERS...210

Page ...212 MANUAL PULLER SETS

Page ...213 PROTECTIVE BLANKETS

Page ...214 2/3 JAW PULLERS GRIP-O-MATIC

Page ...215 PULLER ACCESSORIES GRIP-O-MATIC

Page ...216 PULLERS HYDRAULIC

Page ...220 HYDRAULIC PULLER SETS

Page ...225 BEARING PUSHER

Page ...226 UNIVERSAL PULLER

Page ...228 ROLLER BEARING PULLER/INSTALLER

Page ...230 BEARING, BUSHING, SEAL DRIVERS

Basics

Puller selection
3 Basic Puller Problems

PULLERS

CONSIDERATIONS:

Determine the type of puller or puller combination. Which puller type is best suited for gripping the part?

Is a combination of puller types required?

Determine the reach needed for your particular pulling problem. The puller you select must have a reach equal or greater than the corresponding sizes of the part to be pulled.

Determine the spread need. The spread is determined by the width of the part being pulled. The puller's spread should be greater than the width of the part to be pulled.

Estimate the force needed to solve your pulling problem. A puller with the proper reach and spread will usually have enough capacity to remove the corresponding part. When in doubt, always use a puller with a larger capacity than what may be needed. Rusted parts or parts with a large area of resistance may need more pulling force.



1

PULLING A GEAR, BEARING, WHEEL, PULLEY, ETC., FROM A SHAFT

In order to perform a proper pull, be certain that you firmly grip the gear, bearing, wheel, pulley, etc., and apply force to the shaft. Use a 3-jaw puller, instead of a 2-jaw, whenever possible for better gripping power and a more uniform displacement of pulling force.

RECOMMENDED TOOLS:

Jaw-type pullers: Either manual or hydraulic. For extra force and convenience, use a hydraulic puller. Both are available in 2 or 3 jaw configurations and are used to grip the outer circumference of a part or can be used with a pulling attachment, such as a bearing/pulley attachment. **(pages 196-197, 210-211, 212-213, 222-223)**

Push-Pullers can thread directly into a threaded part for easy and secure removal. Push-Pullers can be used in conjunction with bearing/pulley attachments which grip the part from behind. A wide assortment of male and female threaded adapters are available as well as metric adapters. **(pages 198-199, 214-215)**

Slide hammers are best suited for light-duty tasks. Slide hammers can be used for multiple-with pulling problems when combined pulling attachments. **(pages 202-204)**

Bearing/pulley attachments provide a "knife-like" edge to get behind parts for added versatility and secure removal of parts. Great for parts that don't offer adequate grip with jaw-type pullers. **(page 201)**

Adapters Whether you need an adapter compatible with any number of threaded hole sizes, protection of part to be pulled or for assisting the installation of a component; Power Team offers a variety of adapters to assist in the removal or installation of parts. **(pages 206-207)**

2



PULLING INTERNAL BEARING RACES, RETAINER, SEALS, ETC.

By extending the narrow jaws of an internal pulling attachment through the center of the part to be pulled, a straight pull is insured, and damage to the housing is avoided. While parts within a "blind hole" in a housing do present a problem, Power Team has the internal pulling attachment or a combination of an internal pulling attachment and puller to handle the situation.

RECOMMENDED TOOLS:

Internal pulling attachments have narrow jaws which extend through the center of the part to be pulled. They provide a straight pull and avoid damaging housings. Internal attachments feature adjustable jaws to fit various diameter parts. **(page 204)**

Slide hammer with internal attachment is ideal for removing parts from blind holes, especially where there is no housing to brace puller legs against. **(pages 206-207)**

Push-puller with internal attachment. Push-puller is available in both manual and hydraulic versions. **(pages 202-203)**

PULLERS

3



PULLING A PRESS-FITTED SHAFT FROM A HOUSING

Note: Manual pullers require that the shaft being pulled is no more than twice the diameter of the puller's forcing screw. To determine the recommended tonnage for hydraulic pullers, multiply the diameter of the shaft to be pulled by ten. Example: For a 1" shaft, we recommend 10 tons of pulling force.

A shaft with a threaded end can be removed without damage by using one of our slide hammer, manual Push-puller or hydraulic Push-pullers, in conjunction with the proper threaded adapter. Removal is easy! If the shaft to be removed has external threads, simply choose one of our female threaded adapters of proper size/thread. If the shaft has internal threads, simply choose the correct size male

RECOMMENDED TOOLS:

Slide hammer puller matched with a set of threaded adapters is a perfect tool for light duty pulling needs. **(pages 206-207, 208-209)**

Push-pullers matched with a set of threaded adapters make for an extra versatile pulling tool. **(pages 202-203, 210-211, 218-219)**

WHY OUR ROLLED PULLER THREADS ARE SUPERIOR:

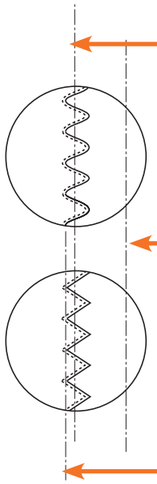

Pitch diameter of thread

Rolled threads start with a material O.D. equal to the pitch diameter of the thread. The rolling process moves material from below the pitch diameter and creates a smoother and stronger thread.

Centerline of screw

Cut threads start with a material O.D. equal to the thread O.D.. Cutting can cause tears on the thread surface which can make it rough and can cause minute cracks at root of thread which can open up during heat treat and lessen the capacity of the screw.

Outside diameter of thread

Puller with a bearing pulling attachment was used to take a bearing off a utilities well pump motor.

Features	Benefits
• Grip-O-Matic® feature on jaw type pullers • 2-way, 3-way and 2/3-way combination pullers 1 to 37 ton mechanical pullers 5 to 50 ton hydraulic pullers 2 1/8" (54 mm) to 27 5/8" (702 mm) reach 3 1/4" (83 mm) to 44" (1,118 mm) of spread • Forged alloy steel jaws • Machined puller jaw toes • Alloy steel heads (forged or flame cut) • Rolled "V" threads • Special coating on threads • Heat treated alloy steel cross bolts • Standard hydraulic cylinders on Grip-O-Matic® series • Adjusting nut on Super Grip-O-Matic® series	• The harder the pulling force, the tighter the jaws grip • A wide variety of pullers; select a specific puller for a specific application or select one or more pullers for general applications • Strongest possible part; the grain of the material follows the contour of the part. • Larger and stronger pulling toe than most competitors • Heat treated and designed for maximum strength • Stronger and smoother than cut threads • Resists corrosion, traps lubrication better than black oxide • Designed for max. shear strength • Cylinder can be removed from puller and used in other hydraulic applications • Allows for controlled jaw spread adjustment

NOTE: The puller application photos shown in this catalog are shown without protective blankets for clarity of photos. Power Team strongly recommends you always make your pull with a protective device in place.

Operator safety comes first!

Tons of force are being exerted with your Pulling System. You must respect this force, and observe safety precautions at all times

⚠ CAUTION

It is impossible to predict the exact force required for every pulling job: setup requirements and the size, shape and condition of the parts being pulled vary a great deal. In addition, the Power Team Pulling System is so versatile, it is possible that components in a pulling setup may have different tonnage ratings.

The lowest "capacity" component, then, determines the capacity of the setup. For example: When an accessory with a 1 ton capacity is used with a 10 ton capacity puller, the setup can be used only at a force of one ton.

These tools should be used only by trained personnel familiar with them.

Always wear eye protection during a job since work parts, or the pulling tool itself, may break and parts may fly. It is recommended to cover the work with a Power Team Protective Blanket or use a shield while force is being applied. If you are at all unsure which tool or attachment to select, contact the Power Team factory.

A few easy tips to remember:

1. **Wear safety glasses at all times!** You have only one pair of eyes, so protect them from possible flying parts.
2. **Keep your pulling tools in shape!** Clean and lubricate the puller's forcing screw frequently, from threads to tip, to assure long service life and proper operation.
3. **Cover work with a protective blanket!** With high forces being exerted on the part being pulled, breakage may sometimes result. By covering the work with a protective blanket, the mechanic reduces the danger of flying parts.
4. **Apply force gradually!** The component should give a little at a time. Do not try speed removal by using an impact wrench on the puller screw.
5. **Use the right size puller!** If you have applied maximum force and the part has not moved, go to a larger capacity puller. Resist sledging.
6. **Align puller legs and jaws!** Be sure the setup is rigid and that the puller is square with the work.
7. **Mount puller so grip is tight!** Tighten the adjusting strap-bolts when using a jaw type puller. Always use a 3-jaw puller whenever possible. A 3-jaw puller gives a more secure grip, more even pulling power. Apply force gradually. — Never use an extension on a wrench. — Never use an impact wrench. — Never strike the end of the forcing screw. Always cover work with a protective blanket.
8. **Do not couple puller legs!** The tonnage capacity of a Push-Puller® is reduced when longer than standard legs are used, or when legs are in compression. The chance of breaking, bending or misaligning legs increases. Keep reach to a minimum. Use shortest legs possible to reach workpiece. Thread legs into workpiece, pulling attachment or adapters evenly. Uneven legs will cause greater pull or push on one side, creating a bending action which could cause damage to work piece or cause a leg to break. The sliding plates must always be on the opposite side of the cross block from the forcing screw nut or hydraulic cylinder. Always cover work with a protective blanket.





Bearing pulling attachments:

These attachments may not withstand the full tonnage of the pullers with which they are used. The shape and condition of the part being pulled affects the tonnage at which the puller blocks and/or studs may bend or break. Always select the largest attachment which will fit the part to be pulled.screw. Always cover work with a protective blanket

Pullers
POSI-LOCK®

PULLERS

FEATURES & BENEFITS

- Pullers are used whenever there are tough maintenance challenges: Railroads, Steel & Paper Mills, Mines, Oil Fields, Wind Farms, Factories, Power Plants, Shipyards, etc.
- Used to pull a variety of press fit parts from gears to wheels, pulleys to bearings, with minimum effort and without damaging the components or machinery.
- Conventional pullers use manual floppy jaws often require two operators to use and can be time-consuming and slow. Traditional jaws slip off work surfaces or snap back making the pulling operation frustrating and difficult.
- With Power Team - Posi Lock, pulling bearings is a one-man operation. The T-handle and "Safety Cage®" control the jaws at all times. This means that the opening, closing, locking and aligning of the jaws is all done automatically by simply turning the T-handle.
- Hydraulic pullers come with a lift plate for ease of transport and lifting. In addition, ram points of different sizes are available for a variety of applications
- Using a hydraulic puller system adds efficiency and eliminates unsafe practices such as hammering,heating, or prying components to be removed. The cylinder replaces the center bolt function of a manual puller.

MECHANICAL

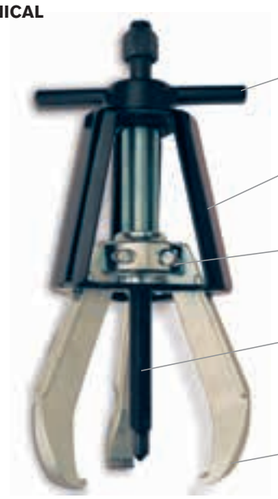

T-handle facilitates the opening, closing, locking and aligning of the jaws.

Steel frame guides jaws for fast setup, solid contact, and superior safety

Leverage up front for vise-like power and no slippage

Center bolt threads designed for less effort to apply high torque

Slim tapered jaws allow for easier gripping and better access to tight spots

HYDRAULIC

Posi Lock® is a registered trademark of Posi Lock Puller, Inc.



ORDERING INFO

MECHANICAL PULLERS

SPX Part #	Cap (Ton)	# of Jaws	Puller Weight kg	Reach mm	Spread mm	Accessories: Long Jaws: SPX Part #	Long Jaws: Reach mm	Long Jaws: Spread mm	Tip Protector	Bolt Extender
PT202	1	2	0,3	57	82.6					
PT204	2	2	1.4	102	127				PTP4	PTX4
PT206	6	2	3.2	152	178				PTP6	PTX6
PT208	12	2	5	203	305	PT11054 / PT11054L	249/406	401/559	PTP10	PTX10
PT210	14	2	6.4	246	381	PT11054L	406	559	PTP10	PTX10
PT213	25	2	13.6	305	457	PT11354L	508	762	PTP13 / PTP16	
PT216	35	2	22.7	356	635	PT11654L	2660	965	PTP13 / PTP16	
PT102	1	3	0.3	57	82.6					
PT103	2	3	0.6	76.2	114.3					
PT104	5	3	1.8	102	127				PTP4	PTX4
PT106	10	3	3.6	152	178				PTP6	PTX6
PT108	17	3	5.9	203	305	PT11054 / PT11054L	249/406	401/559	PTP10	PTX10
PT110	20	3	8.2	246	381	PT11054L	406	559	PTP10	PTX10
PT113	30	3	18.2	305	457	PT11354L	508	762	PTP13 / PTP16	
PT116	40	3	29.5	356	635	PT11654L	660	965	PTP13 / PTP16	

HYDRAULIC PULLERS

SPX Part #	Cap (Ton)	# of Jaws	Puller Weight kg	Reach mm	Spread mm	Accessories: Long Jaws: SPX Part #	Long Jaws: Reach mm	Long Jaws: Spread mm	Leveling Arm Bracket Set	Hydraulic Lift Cart	Storage Transport Cart
PTPHA-206	5	2	5.8	152.4	203.2						
PTPHA-208	10	2	6.4	203	305	PT11054 / PT11054L	249/406	401/559			
PTPHA-210	15	2	10	254	381	PTPH-11054L	406	559	PTPH-1210*		
PTPHA-213	25	2	21.3	305	457	PT11354L	508	62	PTPH-1213	PTPT-3050	PTPT-2550
PTPHA-216	50	2	40.9	356	635	PTPH-21654L	660	965	PTPH-1216	PTPT-3050	PTPT-2550
PTPHA-106	5	3	6.5	152.4	203.2						
PTPHA-108	10	3	7.3	203	305	PT11054 / PT11054L	249/406	401/559			
PTPHA-110	15	3	11.4	254	381	PTPH-11054L	406	559	PTPH-1110*		
PTPHA-113	25	3	25	305	457	PT11354L	508	762	PTPH-1113	PTPT-3050	PTPT-2550
PTPHA-116	50	3	45	356	635	PTPH-11654L	660	965	PTPH-1116	PTPT-3050	PTPT-2550

* Brackets Only

Leveling Arm Bracket

PULLERS

Bundles
POSI-LOCK®

Hydraulic Bundles

PULLERS

PTPHB-110

PTPHC-110E

PTPHD-110-E220

Also available in E110

HYDRAULIC BUNDLES †

SPX Part #	Cap (Ton)	# of Jaws	Cylinder Part #	Pump Part #	Gauge Part #	Hose Part #	T Adapter Part #	Coupler	Dust Cap
PTPHB-206	5	2	C55C						
PTPHC-206E	5	2	C55C	P19L	9040E	9767E	9670	9798	9800
PTPHD-206-E220	5	2	C55C	PE172-E220	9040E	9769E	9670	9798	9800
PTPHD-206-E110	5	2	C55C	PE172-E110	9040E	9769E	9670	9798	9800
PTPHB-208	10	2	C106C						
PTPHC-208E	10	2	C106C	P19L	9040E	9767E	9670	9798	9800
PTPHD-208-E220	10	2	C106C	PE172-E220	9040E	9769E	9670	9798	9800
PTPHD-208-E110	10	2	C106C	PE172-E110	9040E	9769E	9670	9798	9800
PTPHB-210	15	2	C1510C						
PTPHC-210E	15	2	C1510C	P59L	9040E	9767E	9670	9798	9800
PTPHD-210-E220	15	2	C1510C	PE172-E220	9040E	9769E	9670	9798	9800
PTPHD-210-E110	15	2	C1510C	PE172-E110	9040E	9769E	9670	9798	9800
PTPHB-213	25	2	C2514C						
PTPHC-213E	25	2	C2514C	P159	9040E	9767E	9670	9798	9800
PTPHD-213-E220	25	2	C2514C	PE172-E220	9040E	9769E	9670	9798	9800
PTPHD-213-E110	25	2	C2514C	PE172-E110	9040E	9769E	9670	9798	9800
PTPHB-216	50	2	C5513C						
PTPHC-216E	50	2	C5513C	P460	9040E	9767E	9670	9798	9800
PTPHD-216-E220	50	2	C5513C	PE172-E220	9040E	9769E	9670	9798	9800
PTPHD-216-E110	50	2	C5513C	PE172-E110	9040E	9769E	9670	9798	9800

SPX Part #	Cap (Ton)	# of Jaws	Cylinder Part #	Pump Part #	Gauge Part #	Hose Part #	T Adapter Part #	Coupler	Dust Cap
PTPHB-106	5	3	C55C						
PTPHC-106E	5	3	C55C	P19L	9040E	9767E	9670	9798	9800
PTPHD-106-E220	5	3	C55C	PE172 -E220	9040E	9769E	9670	9798	9800
PTPHD-106-E110	5	3	C55C	PE172-E110	9040E	9769E	9670	9798	9800
PTPHB-108	10	3	C106C						
PTPHC-108E	10	3	C106C	P19L	9040E	9767E	9670	9798	9800
PTPHD-108-E220	10	3	C106C	PE172 -E220	9040E	9769E	9670	9798	9800
PTPHD-108-E110	10	3	C106C	PE172-E110	9040E	9769E	9670	9798	9800
PTPHB-110	15	3	C1510C						
PTPHC-110E	15	3	C1510C	P59L	9040E	9767E	9670	9798	9800
PTPHD-110-E220	15	3	C1510C	PE172-E220	9040E	9769E	9670	9798	9800
PTPHD-110-E110	15	3	C1510C	PE172-E110	9040E	9769E	9670	9798	9800
PTPHB-113	25	3	C2514C						
PTPHC-113E	25	3	C2514C	P159	9040E	9767E	9670	9798	9800
PTPHD-113-E220	25	3	C2514C	PE172 -E220	9040E	9769E	9670	9798	9800
PTPHD-113-E110	25	3	C2514C	PE172-E110	9040E	9769E	9670	9798	9800
PTPHB-116	50	3	C5513C						
PTPHC-116E	50	3	C5513C	P460	9040E	9767E	9670	9798	9800
PTPHD-116-E220	50	3	C5513C	PE172 -E220	9040E	9769E	9670	9798	9800
PTPHD-116-E110	50	3	C5513C	PE172-E110	9040E	9769E	9670	9798	980

† C & D Bundles will include 25599 fitting.

Power Team®

High Tonnage
POSI-LOCK®

Hydrauic Pullers

PULLERS

PTPH-100TDA

Features and Benefits:

- 700 bar electric 2 stage pump
- Remote jog switch with 3m cord
- 100 ton cylinder 700 bar with spring return (260.4 mm stroke)
- Hydraulic-actuated lift cart extends puller from ground to a height of 1.5m.
- Jaws are hydraulically controlled with cylinders
- Multiple pushing adapters:
  (1) 89mm diameter X 228.6mm
  (1) 89mm diameter X 482.6mm
  (1) 89mm diameter X 736.6mm
- Removable transport cart
- Puller can be used in horizontal and/or suspended vertical positions
- Adjustable jaw tips
- Adjustable jaw guides

HIGH TONNAGE HYDRAULIC PULLERS

SPX Part #	Cap (Ton)	# of Jaws	Puller Weight (kg)	Reach mm	Spread mm	Jaw Tip Width mm	Tip Clearance mm	Tip Depth	Cylinder Part #	Pump Part #	Gauge Part #	Hose Part #
Single Acting												
PTPH-102T-E220	100	2	772	1270	1778	32	89	89	C10010C	PE552-E220	9040E	9769E
PTPH-102T-E110	100	2	772	1270	1778	32	89	89	C10010C	PE552-E110	9040E	9769E
PTPH-100T-E220	100	3	885	1270	1778	32	89	89	C10010C	PE552-E220	9040E	9769E
PTPH-100T-E110	100	3	885	1270	1778	32	89	89	C10010C	PE552-E110	9040E	9769E
PTPH-123T-E220	100	2/3	908	1270	1778	32	89	89	C10010C	PE552-E220	9040E	9769E
PTPH-123T-E110	100	2/3	908	1270	1778	32	89	89	C10010C	PE552-E110	9040E	9769E
PTPH-102TV-E220*	100	2	817	1270	1778	32	89	89	C10010C	PE552-E220	9040E	9769E
PTPH-102TV-E110*	100	2	817	1270	1778	32	89	89	C10010C	PE552-E110	9040E	9769E
Double Acting												
PTPH-102TDA-E220	100	2	817	1270	1778	32	89	89	RD10013	PE554-E220	9040E	9769E
PTPH-102TDA-E110	100	2	817	1270	1778	32	89	89	RD10013	PE554-E110	9040E	9769E
PTPH-100TDA-E220	100	3	931	1270	1778	32	89	89	RD10013	PE554-E220	9040E	9769E
PTPH-100TDA-E110	100	3	931	1270	1778	32	89	89	RD10013	PE554-E110	9040E	9769E
PTPH-123TDA-E220	100	2/3	953	1270	1778	32	89	89	RD10013	PE554-E220	9040E	9769E
PTPH-123TDA-E110	100	2/3	953	1270	1778	32	89	89	RD10013	PE554-E110	9040E	9769E
PTPH-102DATV-E220*	100	2	817	1270	1778	32	89	89	RD10013	PE554-E220	9040E	9769E
PTPH-102DATV-E110*	100	2	817	1270	1778	32	89	89	RD10013	PE554-E110	9040E	9769E
PTPH-200T-E220**	200	4	1884	1219	1778	32	89	89	CONTACT FACTORY			
PTPH-200T-E110**	200	4	1884	1219	1778	32	89	89	CONTACT FACTORY			
PTPH-200T-E380**	200	4	1884	1219	1778	32	89	89	CONTACT FACTORY			

*** Vertical Puller.**
**** Contact Factory for 200T Hydraulic Puller.**

Jaw Pullers
MECHANICAL

2 & 3 Jaw Pullers

PULLERS

Choosing the right size puller: Compare the "reach" and "spread" of the pulling job with that of the pullers listed. The puller selected must have dimensions greater than those of the job.





Pulling attachment

Shaft protector

- Lock-Jaw™ feature on all pullers. The harder the pull, the tighter the grip for removing gears, bearings and countless other press fitted parts.
- 2-way, 3-way and 2/3 way combination pullers make it easy to select a specific puller for a specific application.
- Forged from high quality steel, heat treated and subjected to rigorous tests which exceed rated puller capacity.
- Meets Fed. Spec.: GGG-P-00781-D

Step plate



	Order No.	Max. Reach (in.)	Max. Spread (in.)	Screw Size (in.)	Jaw Thickness (in.)	Jaw Width (in.)	Capacity, Style and Weight
 1020 1021	1020	2 1/8	3 1/4	5/16–24 x 3 7/8	9/64	1/4	1-Ton, 2-Jaw; 5 oz.
	1021	2 1/8	3 1/4	5/16–24 x 3 7/8	9/64	1/4	1-Ton, 3-Jaw; 8 oz.
1022 1023	1022	3 3/8	4	3/8–24 x 4 7/8	Upper 3/16 Lower 1/8	Upper 1/4 Lower 1/2	2-ton, 2-Jaw; 14 oz. (Reversible Jaws)
	1023	3 3/8	4 3/4	3/8–24 x 4 7/8	Upper 3/16 Lower 1/8	Upper 1/4 Lower 1/2	2-ton, 2/3-Jaw; 1 lb., 5 oz. (Reversible Jaws)
 1024 1026	1024	3 1/4	6	9/16–20 x 6 15/16	Upper 5/16 Lower 1/4	Upper 3/8 Lower 3/4	5-Ton, 2-Jaw; 1 lb., 12 oz. (Reversible Jaws)
	1026	3 1/4	7	9/16–20 x 6 15/16	Upper 5/16 Lower 1/4	Upper 3/8 Lower 3/4	5-Ton, 2/3-Jaw; 2 lbs., 12 oz. (Reversible Jaws)

- Alloy steel heads are forged for maximum strength.
- Forcing screw threads are rolled, not cut. This process creates a smoother and stronger thread.
- Heat treated alloy steel cross bolts for maximum shear strength.
- Machined puller jaw toes produce larger and stronger pulling toes.



	Order No.	Max. Reach (in.)	Max. Spread (in.)	Screw Size (in.)	Jaw Thickness (in.)	Jaw Width (in.)	Capacity, Style and Weight
 1025 1027	1025	5 1/2	6	9/16–20 x 6 15/16	Upper 5/16 Lower 1/4	Upper 3/8 Lower 3/4	5-Ton, Long 2-Jaw; 2 lbs. (Reversible Jaws)
	1027	5 1/2	7	9/16–20 x 6 15/16	Upper 5/16 Lower 1/4	Upper 3/8 Lower 3/4	5-Ton, Long 2/3-Jaw; 3 lbs., 10 oz. (Rev. Jaws)
 1035 1037	1035	5	9	11/16–18 x 9	Upper 5/16 Lower 11/32	Upper 1 Lower 1	7-Ton, 2-Jaw; 4 lbs., 8 oz. (Reversible Jaws)
	1037	5	10 1/2	11/16–18 x 9	Upper 5/16 Lower 11/32	Upper 1 Lower 1	7-Ton, 2/3-Jaw; 6 lbs., 2 oz. (Rev. Jaws)
 1036 1038	1036	8 3/4	9 1/2	11/16–18 x 9	11/32	1	7-Ton, Long 2-Jaw; 5 lbs., 6 oz.
	1038	8 3/4	11	11/16–18 x 9	11/32	1	7-Ton, Long 2/3-Jaw; 8 lbs., 2 oz.
 1039/1040 1041/1042	1039	11	12	13/16–16 x 12	9/16	1	13-Ton, 2-Jaw; 10 lbs., 13 oz.
	1040	15 1/4	15 1/2	13/16–16 x 12	9/16	1	13-Ton, Long 2-Jaw; 13 lbs.
	1041	11	12	13/16–16 x 12	9/16	1	13-Ton, 2/3-Jaw; 16 lbs., 4 oz.
	1042	15 1/4	17	13/16–16 x 12	9/16	1	13-Ton, Long 2/3-Jaw; 18 lbs., 12 oz.
1043/1044 1045/1046	1043	14 1/2	14	1-14 x 13 1/2"	9/16	1	17 1/2-Ton, Long 2-Jaw; 23 lbs.
	1044	18 3/4	16	1–14 x 13 1/2" lg.	13/16	1 9/32	17 1/2-Ton, Long 2-Jaw; 26 lbs.
	1045	14 1/2	14	1–14 x 13 1/2	13/16	1 9/32	17 1/2-Ton, 3-Jaw; 33 lbs.
	1046	18 3/4	16	1–14 x 13 1/2	13/16	1 9/32	17 1/2-Ton, Long 3-Jaw; 37 lbs.
1048 1050	1048	22 1/4	20	1 1/4–12 x 16 5/8	1 1/16	1 1/2	25-Ton, Long 2-Jaw; 42 lbs., 12 oz.
	1050	22 1/4	20	1 1/4–12 x 16 5/8	1 1/16	1 1/2	25-Ton, Long 3-Jaw; 60 lbs.

For puller piece part identification, order Power Team parts catalog PC97

Mechanical
PUSH PULLERS

10, 17½, & 30 Ton Cap.

For removing and installing gears, bearings, pulleys and other press-fitted parts.

PULLERS

Fed. Spec.: GGG-P-00781-D

- Can apply a pushing or pulling force, depending on how the puller is set up.
- Optional leg kits adapt your Push-Puller® to extra long or extra short reach.
- A wide variety of threaded adapters, bearing pulling attachments and internal pulling attachments can be used in combination with our Push-Pullers.®

Selection and capacity rating – Each Push-Puller's specified tonnage "capacity" is determined using its standard legs in tension. Using longer legs, or a setup in which the legs are in compression, will reduce the "capacity". Always select the largest "capacity" puller and the shortest legs that will fit the job.

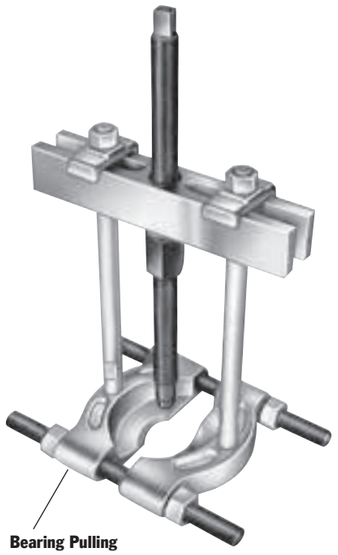

ASSEMBLING THE TOOL TO APPLY PUSHING OR PULLING FORCE:

1. Determine if you want the tool's forcing screw to push or pull.
2. To exert pushing force, the forcing nut is installed beneath the cross block, as shown on left.
3. To cause the forcing screw to pull, the forcing nut is placed on top of the cross block.
4. The sliding plates must always be placed on the opposite side of the cross block from the forcing nut.

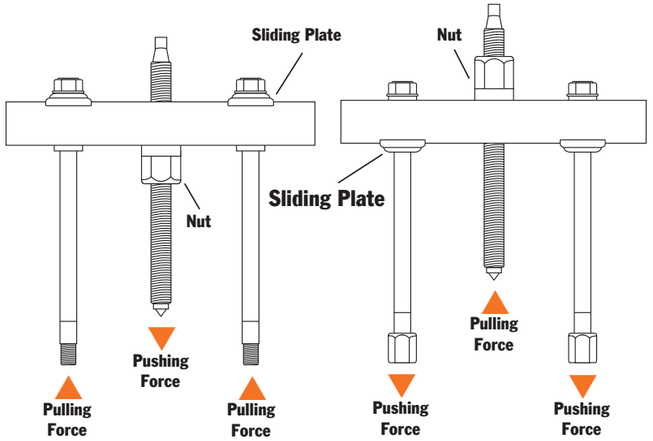

Available Adapters (page 214-215)

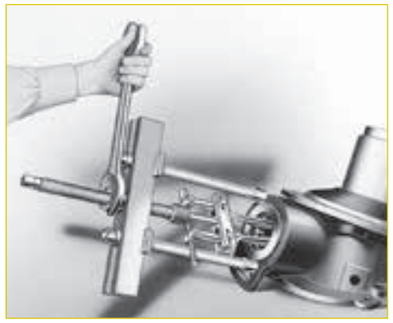

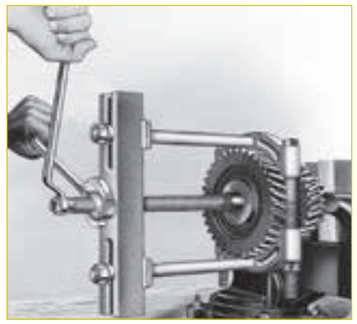

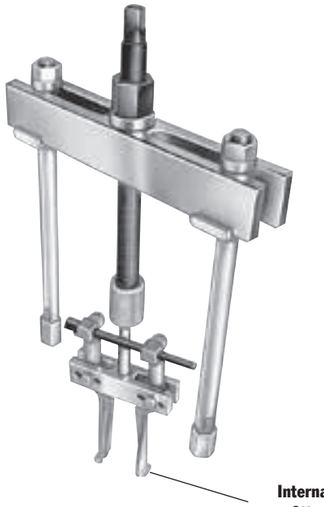

No. 927 – 10-Ton Capacity can be used with No. 1123 bearing pulling attachment or No. 679 pulley pulling attachment. May also be used with Nos. 1150, 1151, 1152, or 1153 internal pulling attachments.

No. 938 – 17½-Ton Capacity can be used with Nos. 1124 and 1130 bearing pulling attachments or Nos. 679 and 680 pulley pulling attachments. May also be used with Nos. 1150, 1151, 1153, 1165, or 1166 internal pulling attachments.

No. 939 – 30-Ton Capacity can be used with Nos. 1126 and 1127 bearing pulling attachments or No. 680 pulley pulling attachment (two 8012 adapters are required to connect 680 to puller). Can be used with No. 1165 internal pulling attachment.

927



Max. Reach	Spread	Screw	Size	Notes / Weight
210 mm	54 - 184 mm	¾"–16 x 305 mm	½" of forcing screw tip end is threaded ⅝"–18. No. 1100 legs and No. 24827 leg ends included. Wt., 3,2 kg.	

Order No.	Leg Length & Wt.	Order No.	Leg Length & Wt.
1103	121 mm, 0,45 kg	1102	298 mm, 1 kg
1100	171 mm, 0,7 kg	1101	400 mm, 1,5 kg

Extra Legs (pair) for No. 927 Push-Puller (Reach equals leg length plus 50,8 mm with leg end caps.)

938

Max. Reach	Spread	Screw	Size	Notes / Weight
282 mm	79–298 mm	1"–14 x 336 mm	Leg ends threaded ⅝"–18. No. 1106 legs and No. 24827 leg ends included. Wt., 9,4 kg	

Order No.	Leg Length & Wt.	Order No.	Leg Length & Wt.
1107	114 mm 1,1 kg	1105	572 mm 4,1 kg
1106	241 mm 2 kg.	1108	762 mm 5,2 kg
1104	419 mm 3 kg		

Extra Legs (pair) for No. 938 Push-Puller (Reach equals leg length plus 50,8 mm with leg end caps.)

939



Max. Reach	Spread	Screw	Size	Notes / Weight
267 mm	178–413 mm	1½"–12 x 438 mm	Leg ends threaded 1"–14. No. 1109 legs and No. 28390 leg ends included. Wt., 20 kg	

Order No.	Leg Length & Wt.	Order No.	Leg Length & Wt.
1109	203 mm 3,6 kg	1111	711 mm 10 kg
1110	457 mm 6,8 kg		

Extra Legs (pair) for No. 939 Push-Puller (Reach equals leg length plus 66,7 mm with leg end caps.)

PULLERS

Pulling
ATTACHMENTS

38,1 - 228 mm Jaw Spreads

Recommended for the removal of bearings, bearing cups, bushings and oil seals.

PULLERS

- Handles internal pulling jobs, such as, bearing/bearing cup removal, bushing removal, oil seals, etc.
- Remove hard to get at parts easily and without damage!
- Use with corresponding Power Team Slide Hammer or Push-Puller.®
- Adjustable jaws fit various diameters

Fed. Spec.: GGG-P-00781-D

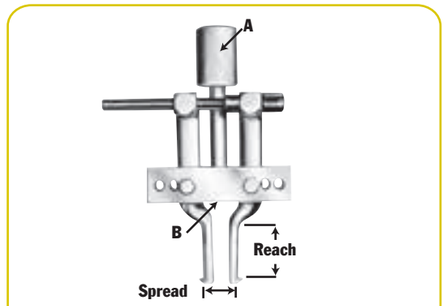

CAUTION – These attachments may not withstand the full tonnage of the pullers they are used with. The shape and condition of the part being pulled affects the tonnage at which the jaws may slip off. Always select the largest attachment which will fit behind the part being pulled. Refer to page 195.

Order No.	Jaw Spread (mm)	Jaw Reach (mm)	A (in. – thd.)	B (in. – thd.)	Wt. (kg)	Application
1153	38,1–127	54	1–14	5/8–18	1,9	Use with Nos. 927 and 938 Push-Pullers,
1150	38,1–152	102	1–14	5/8–18	2	
1151	38,1–178	133	1–14	5/8–18	2	
1152	38,1–152	102	–	5/8–18	1,6	Use with Nos. 927 and 938 Push-Pullers, 1155 and 1156 slide hammer pullers, or 24832 and 24833 puller screw.
1154	38,1–152	102	1–8	5/8–18	2	Use with No. PPH17.
1165	76,7–229	149	1 1/2–12	1–14	6,1	Use with No. 939 Push-Puller.
1166	76,2–229	149	1 1/4–7	1–14	6,1	Use with No. PPH30.
	Puller Screws					
24832	349 mm long		5/8–18	0,5		Use with Nos. 1150, 1151, 1152, and 1153. Acts as a regular forcing screw when threaded directly into block of pulling attachment.
24833	140 mm long		5/8–18	0,2		Use with Nos. 1150, 1152, and 1153. Acts as a regular forcing screw when threaded directly into block of pulling attachment.

Pulling
ATTACHMENTS

Bearing & Pulley

Used where space does not permit hooking puller jaws directly on part to be pulled.

PULLERS

- "Knife-like" edges fit behind bearings and other hard-to-grip parts for easy removal, even where clearance is limited.
- Usable with both Grip-O-Matic® jaw type pullers and Push-Pullers®.
- All puller blocks are made from forged alloy steel

Fed. Spec.: GGG-P-00781-D

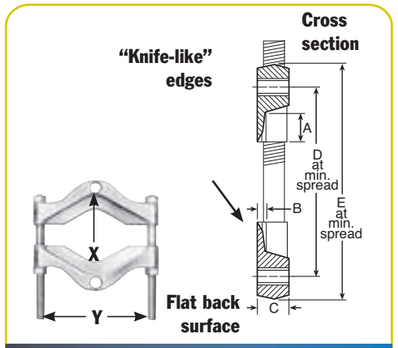

Attachment clamps down into V-groove to distribute load. Use with Grip-O-Matic® pullers or Push-Pullers.

X = Thread of tapped hole in adapter.
Y = Distance between adjusting screws.

Order No.	Max. Spread (mm)	X (in.)	Y (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Wt. (kg)	Application - (Use with Puller Nos.)
1121	6,4-22,2	5/16–18	43	11,1	3,2	12,7	34,9	50,8	0,3	1020, 1022, and 1023.
1122	3,2-51	3/8–16	62	11,1	4,0	15,9	50,8	69,9	0,6	1024, 1025, 1026, 1027, 7392 and 7393.
1123	9,5-117	5/8–18	111	22,2	9,5	25,4	88,9	114,3	2.3	1035, 1036, 1037, 1038, and 927.
1124	12,7-133	5/8–18	152	34,9	11,1	31,8	127	158,8	5,4	1039, 1040, 1041, 1042, PH172, PPH17, and 938.
1126	16-203	1–14	181	34,9	17,5	34,9	146,1	190,5	9	1047, 1043, and 939.
1127	19-340	1–14	260	44,5	17,5	44,5	158,8	215,9	18,8	1047, 1073, and 939.
1128	127-327	1 3/4–12	330	44,5	19,1	57,2	327	406	45,4	PH553C and PPH50. (When using 1128 with PPH50, two 8024 adapters are required to connect PPH50 to the puller tees.)
1130	12,7-219	5/8–18	152	34,9	11,1	31,8	127	158,8	5,4	1039, 1040, 1041, 1042, PH172, PPH17, and 938.
				V-belt pulley pulling attachments						
679	45-149	5/8–18	152						2	1035, 1036, 1037, 1038, and 927.
680	42,3-254	5/8–18	257						10,1	1039, 1040, 1041, 1042, 1047, PH172, PPH30* and 938. (When using 680 with PPH30, two 8012 adapters are required.)

Pulling attachment accessory – "Knife-like" edges of attachment fit behind bearings or other parts for easy removal with "Enforcer 55", even if space does not permit hooking puller jaws directly to part being pulled.
No. 1128 – Spread: 127 to 327 mm. Wt., 45,5 kg.

1128-1129



CAUTION: Please refer to page 195.

Pullers
SLIDE HAMMER

Set No. 981

Blind hole puller set – Removal of bearings, bushings, sleeves and other friction-fitted parts from blind holes can now be accomplished with ease. Set provides selection of expanding collets 8 to 44,5 mm I.D. Collet is placed through bore of part to be removed, then expanded with actuator pin so that lips of collet secure a positive grip for pulling. Pulling force is exerted by means of a forcing screw and bridge assembly or with a slide hammer.

No. 981 – Blind-hole puller set with slide hammer, forcing screw, bridge, actuator pins, collets, and storage box. Wt., 9,5 kg.



blind hole puller example

Order No.	Description	Order No.	Description
24835	Forcing Screw	28253	Actuator Pin (5 mm dia.)
24836	Forcing Screw Nut	28256	Actuator Pin (12,7 mm dia.)
22185	Hammer 1,1 kg.	41331	Bridge
208627	Shank & Tee Bar Assembly	28323GY8	Metal Box
28250	Actuator Pin (3,2 mm dia.)	10419	Metal Box

Order No.	Inch Range	MM Range	Order No.	Inc Range	MM Range
33856*	5/16" to 3/8"	8 to 9.5	33861**	3/4" to 7/8"	19.1 to 22.2
33857*	3/8" to 7/16"	9.5 to 11.1	33862**	7/8" to 1"	22.2 to 25.4
33858**	7/16" to 1/2"	11.1 to 12.7	33863***	1" to 1 1/4"	25.4 to 31.7
33859**	1/2" to 5/8"	12.7 to 15.9	33864**	1 1/4" to 1 1/2"	31.7 to 38.1
33860**	5/8" to 3/4"	15.9 to 19.1	33865***	1 1/2" to 1 3/4	38.1 to 44.4

*Use with 3 mm actuator pin. **Use with 4,8 mm actuator pin. ***Use with 12,7 mm actuator pin

Slide hammer puller set – This very handy set is ideal for those close-quarter, inside pulling jobs. Very practical for pulling motor, generator, and magneto bearings. Also good for removing small-bore bushings, bearings, and oil seals.

No. SS2 – Slide hammer puller set. Wt., 2,6 kg.

Jaw Set		Inside Spread Min. (mm)	Inside Spread Max. (mm)
1172		12,7	50,8
1174		12,7	34,9

Slide hammer puller set – This useful set contains a reversible-jaw slide hammer puller with a 1,1 kg sliding hammer plus an assortment of special jaws (3 of each size) and adapters. In this set, you get all the versatility you demand of a slide hammer puller.

No. 1178 – Slide hammer puller set with 1,1 kg. sliding hammer. Wt., 6,3 kg.

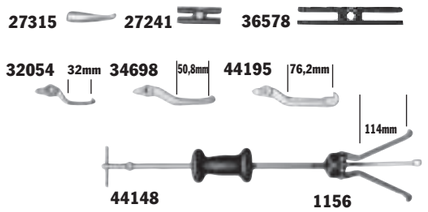

Jaw	2-Jaw Spread Inside Min. (mm)	2-Jaw Spread Inside Max. (mm)	2-Jaw Spread Outside Min. (mm)	2-Jaw Spread Outside Max. (mm)	3-Jaw Spread Inside Min. (mm)	3-Jaw Spread Inside Max. (mm)	3-Jaw Spread Outside Min. (mm)	3-Jaw Spread Outside Max. (mm)
44195	38,1	114,3	19,1	127	38,1	120,7	25,4	114
32054	19,1	60.3	–	–	25,4	69.9	–	–
44148	69,9	139.7	19,1	191	82,6	158,8	25,4	159
34698	31,8	88,9	25,4	114	38,1	108	38,1	114

Sliding hammers only -

No. 22185 – 1,1 kg sliding hammer.

No. 34331 – 2,3 kg sliding hammer.

22185

34331

Bearing cup remover – The 7136 is perfect for pulling internal bearing cups, seals, bushings, etc. Jaw spread – 23,8 to 82,6 mm, reach to 88,9 mm.
Use with any slide hammer having 5/8"-18 thread (Power Team 1155, 1156 or 927 Push-Puller®).

7136

No. 7136 – Universal bearing cup remover. Wt., 0,7 kg.

Pilot bearing pullers -These very versatile pullers are built especially for inside pulling jobs, and particularly for removing flywheel pilot bearings on machines and construction vehicles. Also very practical for pulling motor, generator and magneto bearings.

Special slide hammer puller – Ideal for pulling jobs in very close quarters, as in removal of small-bore bushings, bearings, oil seals, etc. Internal pulling attachment has jaw spread of 12,7 to 35 mm. Handle end has a 1/2"– 20 thread.

Order	Reach	I.D. Spread Min.	I.D. Spread Max.	Wt.
1170	19,1	12,7	38,1	2,2
1171	25,4	22,2	54	2,2
1172	44,5	12,7	50,8	2,2

1170



1173

No. 1173 – Slide hammer puller. Wt., 1,6 kg.

No. 1174 – Puller head, less slide hammer.

Basic slide hammer units – Compatible with internal pulling attachment (see page 198). Compatible with threaded adapters (see page 204-205). 610 mm length, 5/8"– 18 threaded end.

No. 1155 – Basic slide hammer unit with 2,3 kg hammer. Wt., 3,3 kg.

No. 1156 – Basic slide hammer unit with 1,1 kg hammer. Wt., 2,2 kg.

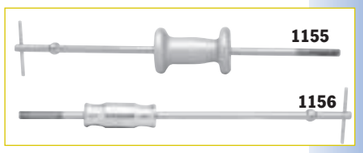

1155

1156

Reversible-jaw slide hammer pullers – Ideal for pulling gears, bearings, outer races, grease retainers, oil seals, etc. Two or three jaws may be used and positioned for "inside" or "outside" pulling jobs. Both have 5/8"– 18 threaded end so attachments and adapters may be used.

No. 1176 – Slide hammer puller with 1,1 kg hammer, 27241 two-way head and 34698 jaws. Wt., 3,3 kg

No. 1177 – Same as 1176 but with 2,2 kg hammer. Wt., 4,8 kg

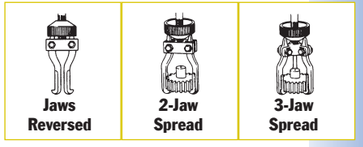

Order No.	2 Jaw Spread Inside Min. (mm)	2 Jaw Spread Inside Max. (mm)	2 Jaw Spread Outside Min. (mm)	2 Jaw Spread Outside Max. (mm)	3 Jaw Spread Inside Min. (mm)	3 Jaw Spread Inside Max. (mm)	3 Jaw Spread Outside Min. (mm)	3 Jaw Spread Outside Max. (mm)	Prod. Wt. (kg)	Overall Length (mm)
1176	31,8	88,9	25,4	114	38,1	108	38,1	114	3,6	686
1177	31,8	88,9	25,4	114	38,1	108	38,1	114	4,8	686

1176

1177

Slide hammer pullers with cup pulling attachments – These combine a basic slide hammer with No. 1152 internal pulling attachment for removing oil seals, outer races, and bearing cups from blind holes.

No. 1157 – Slide hammer puller consisting of 1156 slide hammer and 1152 internal pulling attachment.

No. 1158 – Same as 1157 but with 1155 slide hammer.

Order No.	Reach Max. (mm)	Spread Min. (mm)	Spread Max. (mm)	Prod. Wt. (kg)	Overall Length (mm)
1157	102	38,1	152	4,5	711
1158	102	38,1	152	5,6	711

1158

Puller Sets

Convenient, portable puller sets that go where you do.

10 ton capacity Push-Puller® set – Contains three popular Power Team bar-type pullers in one versatile set, packed in a handy plastic storage case. Tools included permit damage-free pulling of gears, bearings, harmonic balancers, and other parts having tapped holes. Ideal for servicing off-road construction equipment and machinery.

Multi-purpose puller set – This new assortment of pulling tools gives you a wide range of job versatility. You get a 2,2 kg slide hammer puller, hub puller, two sizes of Power Team Grip-O-Matic® jaw-type pullers, a bearing pulling attachment plus a cross-bar gear and pulley puller, all contained in a handy plastic storage case.

Lock-on, jaw-type puller set – Components can be assembled to create several versatile puller versions. The puller head is turned to securely lock the jaws onto the part being removed. Both a 2-way and 3-way puller head are included, plus three long-reach and three short-reach puller jaws in a plastic storage box. Easily removes gears, bearings and other press-fitted parts.

PULLERS

Order No.		Set Contents	Description
1180	10 ton Push-Puller® set, in plastic storage case. Wt., 11,4 kg.	927	10 Ton Push-Puller®; 213 mm reach, 54 to 184 mm spread. Comes with 171 mm puller legs, other leg sizes are available separately (See page 197).
		522	Gear and pulley puller; spread range when used with 12,7 mm cap screws: 50,8 to 197 mm. Cap screws not included.
		7393	Gear and pulley puller with standard 140 mm forcing screw, plus special 330 mm forcing screw. Includes two hex head cap screws, 3/8 "-16 x 76,2 mm long. Spread range: 38 to 180 mm.
1181	Multi-purpose puller set. Wt., 11,4 kg.	1177	Slide hammer puller with 2,2 kg hammer, 2-way and 3-way heads. Reversible: either two or three jaws may be used to handle both "inside" and "outside" pulling jobs.
		7208	Hub puller. Includes a spare locknut which permits use with No. 1177 slide hammer.
		1023	2 ton combination 2- or 3-jaw Grip-O-Matic® puller. Has 86 mm max. reach, 121 mm max.
		1027	5 ton combination 2- or 3-jaw Grip-O-Matic® puller. Has 140 mm max. reach, 178 mm max. spread.
		7393	Bar-type gear and pulley puller with 140 mm long screw. Includes two hex head cap screws, 3/8"-16 x 76 mm long. Spread range: 38 to 108 mm.
		1122	Bearing pulling attachment for use with No. 1027 and No. 7393 pullers. Has 50,8 mm max. spread, 3 mm min. spread.

1182 Jaw-type puller set. Wt., 3,1 kg

Puller Jaws Order	2-Jaw Inside* Min. (mm)	2-Jaw Inside* Max. (mm)	2-Jaw Outside Min. (mm)	2-Jaw Outside Max. (mm)	3-Jaw Spread Inside* Min. (mm)	3-Jaw Spread Inside* Max. (mm)	3-Jaw Spread Outside Min. (mm)	3-Jaw Spread Outside Max. (mm)
44195	38	114	19	127	38,1	121	25,4	114
44148	70	140	19	191	83	159	25,4	159

* Can be used for internal pulling tasks when used with a slide hammer.

Puller Sets
STRONG BOX

10 Ton Cap
Push-Pullers®, 2/3 Jaw Pullers & Specialty Pullers

Have the puller you need on hand, when you need it, protected from unauthorized users.

PULLERS

IPS10B

10 ton capacity Strong Box puller set – Here's a set of pullers that gives you almost unheard of versatility. This rugged, lockable metal storage cabinet contains pullers, attachments and extra puller jaws good for a variety of applications. Cabinet may be mounted on a wall, stand, or workbench.

IPS10HB

10 ton capacity hydraulic/manual puller set in Strong Box – This lockable metal Strong Box contains both hydraulic and manual pullers, plus attachments. The rugged storage cabinet keeps the tools organized and secure from unauthorized borrowers!

- Have the puller you need on hand, when you need it, protected from unauthorized or casual borrowers.
- Almost unheard of versatility
- Rugged, lockable storage cabinet.
- Wall, stand or workbench mountable.

Order No.	Set Contents	Description
IPS10B Cabinet (654 x 749 x 254 mm) with tool board, adapter board, and tool set. Wt., 44,5 kg.	927	10 ton capacity Push-Puller® with 172 mm legs
	1027	5 ton combination 2/3-jaw puller
	1037	7 ton combination 2/3-jaw puller
	1101	400 mm puller legs (pair)
	1122	Bearing pulling attachment
	1123	Bearing pulling attachment
	1152	Internal pulling attachment
	7393	Gear and pulley puller
	8005, 8006, 8007, 8010 8013, 8015, 8019	Male/female threaded Adapters (2 ea.)
	8035, 8037, 8038, 8039, 8040	Female threaded adapters
	8050 thru 8053	Shaft protectors
	8057 thru 8062	Step plate adapters
	43892	Long jaws for 1037 (3)
	212867	Cabinet, tool board and adapter board
IPS10HB Cabinet (654 x749 x 254 mm) with tool board, pullers, and hydraulics. Wt., 44,5 kg.	*PH103C	10 ton combination 2/3-jaw hydraulic puller
	1027	5 ton combination 2/3-jaw puller
	1042	13 ton combination 2/3-jaw puller
	1177	Slide hammer puller
	44148	3 jaws for slide hammer puller (114 mm)
	44195	3 jaws for slide hammer puller (76 mm)
	36578	Slotted cross head for slide hammer puller
	27315	Seal hook for slide hammer puller
	1152	Internal pulling attachment (38 to152 mm spread)
	24832	Forcing screw for 1152
	215315	Cabinet and tool board

* See page 212.

Adapters

Specialty Pullers & Metric

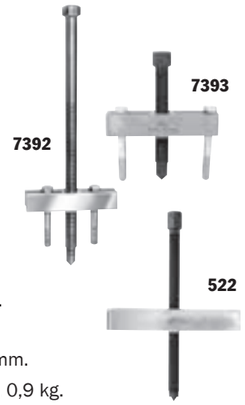

Gear and pulley pullers – Ideal for pulling many small parts having tapped holes. The Nos. 7392 and 7393 may be used with the No. 1122 pulling attachment to remove bearings, etc. Pullers include two hex head cap screws, 3/8" – 16 NC x 76 mm long. Spread: 38 – 108 mm. Width of puller block is 124 mm. Cap screws are not included with the No. 522, but any cap screws up to 12,7 mm diameter may be used. No. 522 spread, when used with 12,7 mm dia. cap screws, is 51–197 mm. Width of the No. 522 puller block is 209 mm.

No. 7392 – Puller with 5/8"-18 x 330 mm long screw. Wt., 0,9 kg.

No. 7393 – Puller with 5/8"-18 x 140 mm long screw. Wt., 0,7 kg

No. 522 – Puller with 3/4"-16 x 295 mm long screw. Wt., 2 kg

4-in-1 puller set – You can quickly assemble a 2- or 3-jaw puller with standard or long reach jaws.

No. PA7 – Four-In-One puller set, 7 ton capacity. Standard jaw max. reach is 127 mm. Maximum spread is 267 mm. Long jaw maximum reach is 222 mm. Maximum spread is 279 mm., 4,9 kg

Flange type puller – Slotted holes in puller body permit cap screws to be positioned to handle bolt-circle diameters from 38 –117 mm.

No. 518 – Flange type puller. Includes 3 cap screws, 3/8" – 24 NF x 76 mm long and 3 cap screws 3/8" – 16 NC x 76 mm long. Forcing screw is 5/8"-18 x 127 mm long Wt., 1,5 kg.

Metric adapters – Add metric capability to your Push-Puller® legs or forcing screws! Four separate metric kits available with a variety of sizes for your Push-Puller® legs or forcing screws! Each packaged in a convenient plastic organizer case.

Order No.	Kit Contents	Female End	Male End	Length (mm)	Order No.	Kit Contents	Female End	Male End	Length (mm)
No. 8110 Male Metric Wt., 1,4 kg	8111	5/8"-18	M6 x 1.0	57,2	**No. 8120** Male Metric Wt., 1,3 kg	8121	5/8"-18	M14 x 1.5	57
	8112	5/8"-18	M8 x 1.0	57,2		8122	5/8"-18	M14 x 2.0	57
	8113	5/8"-18	M8 x 1.25	57,2		8123	5/8"-18	M16 x 1.5	70
	8114	5/8"-18	M10 x 1.25	57,2		8124	5/8"-18	M16 x 2.0	70
	8115	5/8"-18	M10 x 1.50	57,2		8125	5/8"-18	M20 x 1.5	70
	8116	5/8"-18	M12 x 1.25	57,2		8126	5/8"-18	M20 x 2.5	70
	8117	5/8"-18	M12 x 1.75	57,2					

Note: The adapters in each of these sets are also available separately.

Female threaded adapters - Use these adapters on the ends of Push-Puller® forcing screws, legs, or slide hammers in the removal and installation of shafts, axles, and housings.

Set No. 8044 – consists of a set of 6 adapters (Nos. 8037-8042)



Order No.	Female End "A"	Female End "B"	Order No.	Female End "A"	Female End "B"
8035*	1/2"-20	5/8"-18	8040	5/8"-18	1"-14
8036*	1"-14	1"-14	8041	5/8"-18	1 1/8"-12
8037	5/8"-18	5/8"-18	8042	5/8"-18	1 1/4"-12
8038	5/8"-18	3/4"-16	8043*	5/8"-18	1 1/2"-12
8039	5/8"-18	7/8"-14			

Note: All adapters available separately.

*Not included in set No. 8044. Order separately.

Male-female threaded adapters – These adapters are used on ends of Push-Puller® legs, with forcing screws or slide hammers to assist in pulling shafts, bearing caps, pinions, and many other parts.



Fed. Spec.: GGG-P-00781-D

Order No.	Female End	Male End	Length (mm)	Order No.	Female End	Male End	Length (mm)
8000	5/8"-18	1/4"-20	57,2	**8015**	5/8"-18	3/4"-10	57,2
8001	5/8"-18	5/16"-18	57,2	**8016**	1"-14	3/4"-10	63,5
8002	5/8"-18	7/16"-14	57,2	**8017**	5/8"-18	7/8"-14	57,2
8003	5/8"-18	7/16"-20	57,2	**8018**	5/8"-18	7/8"-9	57,2
8004	5/8"-18	3/8"-24	57,2	**8019**	5/8"-18	1"-14	57,2
8005	5/8"-18	3/8"-16	57,2	**8020**	1"-8	5/8"-18	76,2
8006	5/8"-18	1/2"-20	57,2	**8021**	1"-8	1"-14	76,2
8007	5/8"-18	1/2"-13	57,2	**8022**	5/8"-18	1/8" pipe	57,2
8008	5/8"-18	9/16"-18	57,2	**8023**	1 1/4"-12	1"-14	114,3
8009	5/8"-18	9/16"-12	57,2	**8024**	1 1/4"-12	1 3/4"-12	114,3
8010	5/8"-18	5/8"-11	57,2	**8025**	1 1/4"-7	5/8"-18	101,6
8011	1"-14	5/16"-11	63,5	**8027**	1 1/4"-7	1"-14	101,6
8012	1"-14	5/8"-18	81	**8028**	1 5/8"-5 1/2	1"-8	101,6
8013	5/8"-18	3/4"-16	57,2	**8029**	1 5/8"-5 1/2	1"-14	101,6
8014	1"-14	3/4"-16	63,5				

Note: Nos. 8000–8029 – each sold individually.

Step plate adapter sets – Power Team step plate adapters are necessary for pulling and installing bearings, gears, or other parts on hollow shafts or housings. Puller screw forces against step plate adapter, as shown at right. May be used with Power Team jaw-type pullers, Push-Pullers® and shop presses.

Set No. 8075 – set of 11 adapters (Nos. 8057-8067).

Set No. 8076 – set of 6 adapters (Nos. 8068-8073).



Order No.	Set No. 8075 Dia."A" (mm)	Dia."B" (mm)	Order No.	Set No. 8075 Dia."A" (mm)	Dia."B" (mm)	Order No.	Set No. 8076 Dia."A" (mm)	Dia."B" (mm)
8057	25,4	19,1	**8063**	47,5	38,1	**8068**	66,5	53,8
8058	28,4	22,1	**8064**	50,8	41,1	**8069**	69,9	57,2
8059	31,8	25,4	**8065**	53,8	44,5	**8070**	72,9	60,3
8060	34,8	28,4	**8066**	60,2	47,5	**8071**	76,2	63,5
8061	41,1	31,8	**8067**	63,5	50,8	**8072**	82,6	69,9
8062	44,5	34,8				**8073**	88,9	76,2

Shaft protector set -- Power Team shaft protectors are designed to protect shaft centers from distortion when extreme pressures are applied with jaw-type pullers or Push-Pullers®. Shaft protectors are inserted between the end of the puller screw and the shaft.

Set No. 8056 – Set of 6 shaft protectors (Nos. 8050 thru 8055).



Order No.	"A" (mm)	"B" (mm)	"C" (60°) (mm)	"D" (60°) (mm)	Order No.	"A" (mm)	"B" (mm)	"C" (60°) (mm)	"D" (60°) (mm)
8050	38,1	19,1	9,4	11,1	**8053**	19,1	19,1	6,4	6,4
8051	31,8	19,1	9,4	9,4	**8054**	15,7	15,7	6,4	6,4
8052	25,4	19,1	9,4	7,9	**8055**	15,7	15,7	4,8	4,8



⚠CAUTION: All the items shown may not withstand the full tonnage of the pullers they may be used with. Refer to page 195.

Puller Sets
MANUAL

10 & 17½ Ton

10 ton manual puller set – This puller set is just what you need for removing gears, bearings, etc. Includes pullers, attachments, and many accessories.

IPS10M

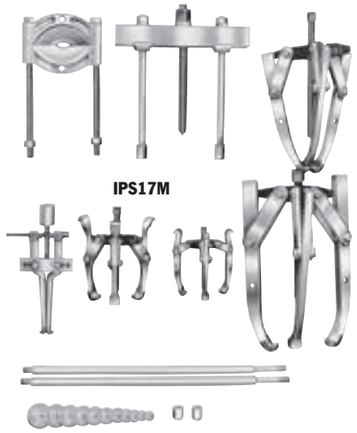

IPS17M

17½ ton manual puller set – The pullers and accessories in this set can be used for hundreds of applications including quick and easy maintenance involving removal and replacement of press-fit parts.

Manual Puller Set No. Order No.	Set Contents	Pullers	Set Contents	Accessories
IPS10M 10 ton capacity Wt., 24 kg.	**927**	10 ton capacity Push-Puller® with 171 mm legs	**8075**	Step plate adapter set
	1023	2 ton combination 2/3-jaw puller	**8044**	Female threaded adapter set
	1026	5 ton combination 2/3-jaw puller	**8035**	Female threaded adapter: ½"–20 x ⅝"–18
	1027	5 ton combination 2/3-jaw puller	**1151**	Bearing cup pulling attachment
	1037	7 ton combination 2/3-jaw puller	**1121**	Bearing pulling attachment
	1178	Slide hammer set	**1122**	Bearing pulling attachment
			1123	Bearing pulling attachment
			1101	400 mm long puller legs for 927 (pr.)
IPS17M 17½ ton capacity Wt., 52,7 kg.	**938**	17½ ton capacity Push-Puller® with 241 mm legs	**8075**	Step plate adapter set
	1027	5 ton combo 2/3-jaw puller, with long jaws	**1105**	572 mm legs for 938
	1037	7 ton combination 2/3-jaw puller	**1130**	Bearing pulling attachment
	1041	13 ton combination 2/3 jaw puller	**1151**	Bearing cup pulling attachment
	1045	17½ ton 3-jaw puller	**8038**	Female adapter: ⅝"–18 F. x ¾"–16 F. (2)

Protective Blankets
and Security Chests

PB1230C

Power Team protective blanket – Our blankets are designed to contain broken or flying parts from the most extreme forces, thus resulting in a much safer work environment.

Testing results – In our lab, this style of blanket held the parts of a necked-down grade 8 bolt, which shattered in a 100 ton center-hole hydraulic cylinder. The blanket sustained no visible damage when shot with a force and impact that shattered safety glasses!

- Effectively contain broken or flying parts from the most extreme pulling, pressing, pushing or stressing forces.
- Ideal for use with pullers and forcing presses.
- Made of see-through, high-tensile, tear resistant material.
- Unlike rigid, fixed guards, these blankets can be wrapped and strapped around a job.
- The clear protective blankets allow you to visually monitor the job from start to finish.
- Protective blankets come in a carrying/storage pouch to reduce aging caused by prolonged exposure to light.

Protect yourself and your equipment.

Order No.	Size (mm)	Number of Straps	Wt. (kg)
PB1230C	305 x 762	2	1,3
PB2036C	508 x 914	2	1,9
PB2860	711 x 1.524	3	4,2
PB3372C	838 x 1.829	3	5,3
PB44120C	1.118 x 3.048	4	10,9
PB51156C	1.295 x 3.962	4	15,5

Note: Custom sizes are available on a special order basis. Please consult factory.

Job-site and maintenance security chests – Protect your valuable tools and equipment from theft and weather. When the day's work is finished, you want to rest assured that your tools and equipment will be present the next day. In these times, security is a real concern. These rugged, lockable chests are the answer that many of our customers have been asking for.



- Rugged, 1,6 mm steel construction with fully arc welded seams for extra strength and weather protection.
- Full length piano hinges, mating cover to body, protect against weather and theft.
- Single or double latch security tabs for padlocks.
- Mechanical cover supports, two 57 mm high skids.
- Fold-down 19 mm pipe handles on each end of chest.
- Pre-drilled for optional casters, which enhance mobility.
- Durable baked enamel finish.

Order No.	Dimensions A (mm)	B (mm)	C (mm)	D (mm)	Storage Cap. (cu. m)	Wt. (kg)	Optional Caster Wheels
MB5	883	356	813	483	0,14	30	**No. 251646–** Set of four 102 mm casters (two swivel and two rigid). Furnished with mounting screws. Wt., 5,7 kg.
MB8	1.010	483	1.670	483	0,25	40,9	
MB16	1264	610	1.219	610	0,45	57,2	**No. 251647 –** Set of four 152 mm casters (two swivel and two rigid). Furnished with mounting screws. Wt., 7 kg.

Hydra Grip-O-Matic®

USE WITH 2/3 JAW PULLERS

6, 8, 11 & 30 Ton

A self contained pulling system in a compact package

PULLERS

PH82K

- You get the world's most copied puller design; the harder the pulling force, the tighter the jaws grip for secure holding force.
- Power Team pullers are tested for top performance and reliability at maximum capacity and jaw spread.
- Removing a wide variety of gears, bearings, bushings, pulleys and other press-fitted parts becomes a routine task.
- Easily metered release valve control knob.
- Spring loaded live centering cone.
- Bladder type oil reservoir.
- Rapid adjustment.
- Use with 2 or 3 jaws.
- Supplied with a sturdy storage/carrying case.
- Features Power Team's exclusive Marathon Limited Lifetime Warranty



Hydra Grip-O-Matic® pulling system - These pullers are ideal for pulling a wide variety of press-fitted parts including bushings, bearings, wheels, gears and pulleys. Applications can be found in a wide variety of industries as well. Grip-O-Matic® pullers have been rigorously tested for top performance and reliability. PH82K is a complete pulling system which includes a hydraulic power module, 2-way puller head, jaws, legs and bearing splitter attachment; all contained in a convenient carrying case.

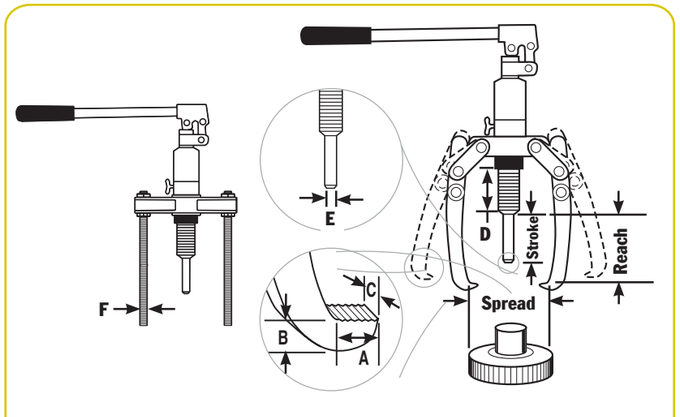

Cyl. Cap. (tons)	Order No.	Reach Studs (mm)	Reach Jaws (mm)	Min. Reach (mm)	Max. Studs (mm)	Spread Jaws (mm)	Stroke (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (in.)	Wt.
6	**PH63C**	--	152	--	--	200	80	11	6,4	22	83	22	–	4,9
8	**PH83C**	--	190	--	–	249	80	11	9,5	25,4	83	22	--	6,6
15	**PH113C**	–	229	--	–	280	80	14,3	9,5	29	83	29	--	8,0
30	**PH303C**	266,7	375	--	--	540	110	27	36,5	38	170	54	5/8-18 UNF	32,3
8	**PH82K**	266,7	207	125	300	245	80	52	25,4	16	83	22	5/8-18 UNF	9,5
11	**HST11S**	–	150	--	–	102-410	80	–	–	–	65	29	–	14,5

Puller

Accessories

PULLERS

K82

Hydra Grip-O-Matic® puller accessory kits – K82 accessory kit for the Hydra-Grip-O-Matic® puller No. PH83C. Includes 2-way puller head, 2 jaws, 2 threaded legs and sturdy carrying/storage case.

No. K82 – Accessory kit for PH83C Grip-O-Matic® hydraulic puller. K83 2/3 way head accessories kit for a Hydra Grip-O-Matic® puller No. PH83C. Includes 2/3 way puller head, 3 jaws, 3 threaded legs (5/8-18 thread) and sturdy carrying/ storage case. Also can be used with 1123, 1124, 1130 pulling attachments.

No. K83 – Accessory kit for PH83C Grip-O-Matic® hydraulic puller.

K83

Puller Accessory converts PH113C into a Hydraulic Straightening Tool – Portable...Good for straightening mechanical shafts, round bars, etc. Simply remove pump and cylinder from puller head and insert them into the straightening tool accessory. This product is widely used in steel mills, wire roll companies, wire extruding companies, textile industry, and any straightening situation where portability and power are required. Contoured heat-treated shaft adapter included.

No. HST11 – Spread: 89 to 410 mm, Reach: 150 mm. Wt., 9,5 kg.

HST11



Shaft adapter included

Long jaw set for PH83C and PH113C Grip-O-Matic® pullers – This long jaw set is the perfect addition to the PH83C or PH113C Grip-O-Matic® hydraulic pullers. The extra long jaws give you the added capability of pulling a wider variety of parts. Jaw capacity is 8 tons when used with the PH83C puller; 15 tons when used with the PH113C puller.

No. 1188 – Spread: 280 to 317 mm, Reach: 317 mm.

Pullers
HYDRAULIC

5, 10, 17½, 30 & 50 Ton

- Remove gears, bearings, and other press-fitted parts with speed and ease.
- Broad capacity range of 5, 10, 17½, 30 and 50 tons.
- 5 and 10 ton sets include: single-acting, spring return hydraulic cylinder with hose, coupler and dust cap; single-speed hydraulic hand pump; puller.
- 17½, 30 and 50 tons sets include: Power-Twin® single acting, spring return hydraulic cylinder with hose, coupler and dust cap; single-speed hydraulic hand pump; puller, adjusting screw and crank.
- Hydraulic cylinder of all models is readily removable from puller for use with pump in other hydraulic applications. You get maximum maintenance versatility for your investment.

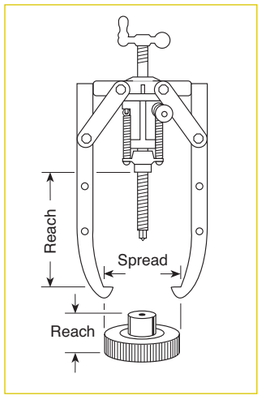

Fed. Spec.: GGG-P-00781-D

5 ton capacity, 2/3 jaw puller –

No. PH53C – Combination 2-jaw/3-jaw puller set. Includes 1057 5 ton puller, RPS55 hydraulic set (C55C cylinder, P12 700 bar hand pump, fittings, coupler, and 1,8 m hose), and 309874 pushing adapter. Wt., 9,1 kg.

No. PH53CR – Combination 2-jaw/3-jaw puller set. Includes 1057 5 ton puller, C55C cylinder, and 309874 pushing adapter. Wt., 5,5 kg

No. 1057 – 5 ton cap. 2-jaw/3-jaw puller only. Wt., 3,5 kg.

Available components -

No. 309874 – 15,9 mm diameter pushing adapter. (Included with PH53C and PH53CR hydraulic puller sets.) Wt., 0,3 kg.

No. 309875 – 22,2 mm diameter pushing adapter. Wt., 0,3 kg.

No. 47997 – 2-way/3-way puller head. (Can be used to convert No. 1038 7 ton manual puller into a 5 ton hydraulic puller.) Wt., 1,1 kg.

10 ton capacity, 2/3 jaw puller -

No. PH103C – Combination 2-jaw/3-jaw puller; 10 ton capacity. Set includes 1060 10 ton puller, RPS1010 cylinder and pump set, 202179 threaded adapter, and 34602 pushing adapter. Wt., 23,6 kg.

No. PH103CR – Combination 2-jaw/3-jaw puller, 10 ton capacity. Set includes 1060 10 ton puller, 202179 threaded adapter, 34602 pushing adapter, and C1010C cylinder only. (Pump and hose not included.) Wt., 14,5 kg.

No. 1060 – Combination 2-jaw/3-jaw puller only; 10 ton capacity. (Cylinder and pump set, hose, coupler, and adapter No. 202179 not included.) Wt., 7,7 kg.

NOTE: This puller may be used with any 10 ton single-acting cylinder having a 2¼"–14 straight collar thread.

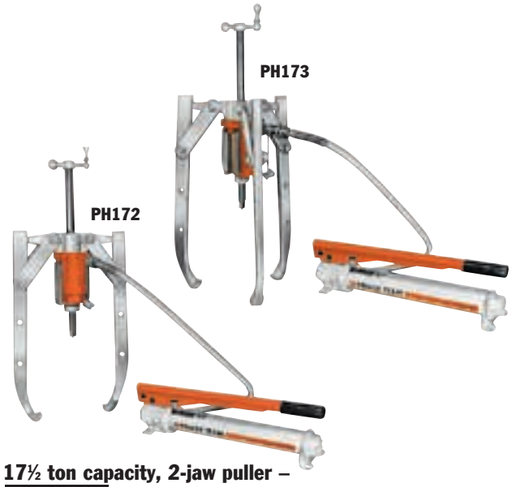

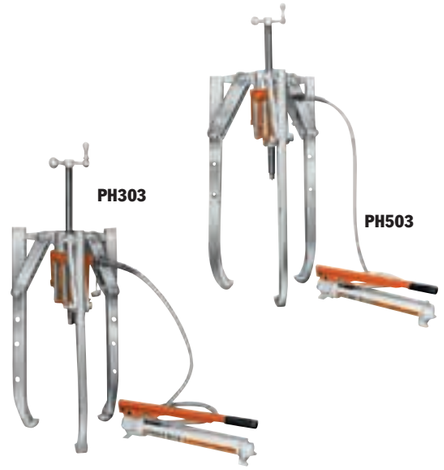

17½ ton capacity, 2-jaw puller –

No. PH172 – 2-jaw puller with RT172 center-hole Power-Twin® cylinder, cylinder half coupler, P55 pump, 1,8 m hose, hose half coupler, 1"– 8 x 508 mm long adjusting screw, and adjusting crank. Wt., 27,7 kg.

No. 1064 – Puller only. (Cylinder, pump, hose, coupler, screw, and crank not included). Wt.,10 kg.

17½ ton capacity, 3-jaw puller –

No. PH173 – 3-jaw puller with RT172 center-hole Power-Twin® cylinder, cylinder half coupler, P55 pump, 1,8 m hose, hose half coupler, 1"– 8 x 508 mm long adjusting screw, and adjusting crank. Wt., 34 kg.

No. PH173R – 3-jaw puller with screw and crank, and RT172 center-hole twin cylinder. Wt.,25,4 kg .

No. 1066 – Puller only. (Cylinder, pump, hose, coupler, screw, and crank not included). Wt., 16,3 kg.

30 ton capacity, 3-jaw puller –

No. PH303 – 3-jaw puller with RT302 center-hole Power-Twin® cylinder, cylinder half coupler, P55 pump, 1,8 m hose, hose half coupler, 1¼"– 7 x 610 mm lg. adjusting screw, and adjusting crank. Wt., 67,7 kg.

No. PH303R – 3-jaw puller with screw and crank, and RT302 center-hole twin cylinder. Wt., 59 kg.

No. 1074 – Puller only. (Cylinder, pump, hose, coupler, screw, and crank not included). Wt., 40,9 kg.

50 ton capacity, 3-jaw puller –

No. PH503 – 3-jaw puller with RT503 center-hole Power-Twin® cylinder, cylinder half coupler, P55 pump, 1,8 m hose, hose half coupler, 1⅝"– 51/2 x 772 mm long adjusting screw, and adjusting crank. Wt., 130 kg.

No. 1080 – 3-jaw puller only. (Cylinder, pump, hose, coupler, screw, and crank not included). Wt., 86,7 kg.

PULLER ONLY

Order No.	Cap. (Tons)	Jaws	Jaw Reach (mm)	Jaw Spread (mm)	Jaw Thickness (mm)	Jaw Width (mm)	Wt. (kg)
1057	5	2/3	222	292	8,7	25	3,5
1060	10	2/3	381	432	14,3	25	7,7
1064	17½	2	292	406	20,6	32,5	10
1066	17½	3	292	508	20,6	32,5	16,3
1074	30	3	494	864	28,6	41,3	40,9
1080	50	3	702	1.118	35,7	47,6	86,7

⚠ **CAUTION:** Always use a 3-jaw puller where clearance permits in order to provide a more stable setup and a more even pulling force.

Push-Pullers®
HYDRAULIC
17½, 30-50 Ton

The power to make impossible jobs become routine.

- Can apply a hydraulic pushing or pulling force, depending on how the puller is set up.
- Each unit includes perfectly matched hydraulic components that can be detached from the Push-Puller® for other tasks requiring dependable Power Team power; assuring maximum return on your investment.
- Optional leg kits adapt your Push-Puller® to extra long or extra short reach.
- A wide variety of threaded adapters, bearing pulling attachments and internal pulling attachments can be used in combination with our Push-Pullers®.



NOTE: L = leg length: 114; 241; 419; 572 and 762 mm subtract 124 mm from leg length to determine reach when using leg end caps.

ASSEMBLING THE TOOL TO APPLY PUSHING OR PULLING FORCE:

1. Determine if you want the tool's forcing screw to push or pull.
2. To exert pushing force, the forcing nut is installed beneath the cross block, as shown on left.
3. To cause the forcing screw to pull, the forcing nut is placed on top of the cross block.
4. The sliding plates must always be placed on the opposite side of the cross block from the forcing nut.

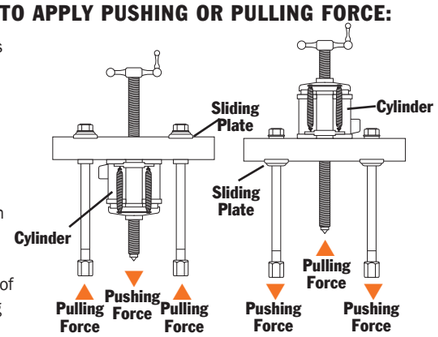

Selection and capacity rating – Each Push-Puller's specified tonnage "capacity" is determined using its standard legs in tension. Using longer legs, or a setup in which the legs are in compression, will reduce the "capacity". Always select the largest "capacity" puller and the shortest legs that will fit the job.

Power Twin® cylinder – This unique center-hole cylinder powers each Push-Puller®. Puller screw runs right between the twin spring cylinder. A basic head allows you to change from a tapped hole to a plain hole by merely changing the head insert.

17½ ton capacity Push-Puller® –

No. PPH17 – Push-Puller® with RT172 center-hole Power Twin® cylinder, cylinder half coupler, P55 pump, 9767 1,8 m. hose, 9798 hose half coupler, 419 mm legs, 24827 leg ends, 1"-8 x 508 mm lg. adjusting screw and adjusting crank. Wt., 26,8 kg.

No. PPH17R – Same as above, but without P55pump, 9767 1,8 m. hose and 9798 hose half coupler. Wt., 18,2 kg.

No. 1062 – Puller only. (Cylinder, pump, hose, coupler, screw and crank not included.) Wt., 9,1 kg.

USE WITH:

Bearing pulling attachments: **Nos. 1124 and 1130**.

Pulley pulling attachment: **No. 679**.

Internal pulling attachment: **No. 1154**.

Legs: **Nos. 1104, 1105, 1106, 1107 and 1108 -** Pair of legs for 17½-ton "capacity" Push-Puller®.



Leg Ends – Upper leg ends are threaded ¾"-16. Lower leg ends are threaded ⅝"-18 x 25 mm lg.



30 ton capacity Push-Puller® -

No. PPH30 – Push-Puller® with RT302 center-hole Power Twin® cylinder, cylinder half coupler, P55 pump, 9767 1,8 m. hose, 9798 hose half coupler, 457 mm legs, 28390 leg ends, 1¼"-7 x 610 mm lg. adjusting screw and adjusting crank. Wt., 46,3 kg.

No. PPH30R – Same as above, but without P55 pump, 9767 1,8 m hose and 9798 hose half coupler. Wt., 37,2 kg.

No. 1070 – Puller only. (Cylinder, pump, hose, coupler, screw and crank not included.) Wt., 19,1 kg.

USE WITH:

Bearing pulling attachments. **No. 680** (Use two 8012 adapters to connect to puller.)

Pulley pulling attachment: **No. 679**.

Internal pulling attachment: **No. 1166**.

Legs: **Nos. 1109, 1110 and 1111 -** Pair of legs for 30 ton "capacity" Push-Puller®.

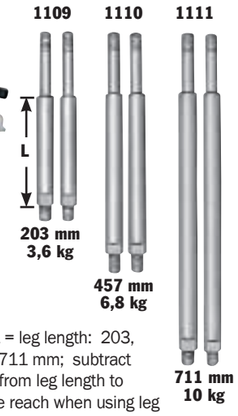

Note: L = leg length: 203, 457 and 711 mm; subtract 149 mm from leg length to determine reach when using leg end caps.

Leg ends are threaded 1"-14 x 32 mm lg.

50 ton capacity Push-Puller® -

No. PPH50 – Push-Puller® with RT503 center-hole Power Twin® cylinder, cylinder half coupler, P55 pump, 9767 1,8 m hose, 9798 hose half coupler, 610 mm legs, 1⅝"-5½ x 722 mm lg. adjusting screw and adjusting crank. Wt., 91,3 kg.

No. PPH50R – Same as above, but without P55 pump, 9767 1,8 m hose and 9798 hose half coupler. Wt., 82,2 kg.

No. 1076 – Puller only. (Cylinder, pump, hose, coupler, screw and crank not included.) Wt., 48,1 kg.

USE WITH:

Bearing pulling attachments: **Nos. 1128 and 1129**.

Legs: **Nos. 1112 and 1113 -** Pair of legs for 50 ton "capacity" Push-Puller®.

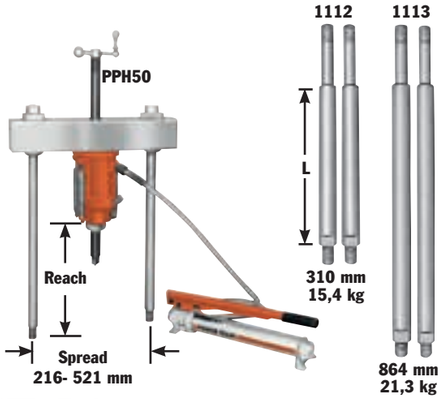

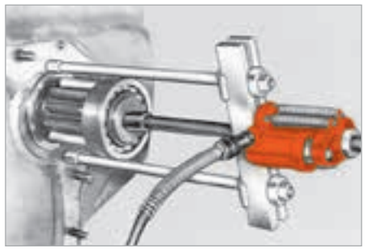

Leg ends are threaded 1¼"-12 x 44,5 mm lg.

PULLER SELECTION Page 192
ACCESSORIES Page 215

Puller Sets
HYDRAULIC

17½, 30 & 50 Ton

PULLERS

17½ ton hydraulic master puller sets – Having this Power Team puller set at your fingertips will not only reduce your downtime, but also increase your profits.

No. IPS17 – 17½ ton capacity puller set. Includes hydraulics, pullers, wooden storage box and accessories listed below. Wt., 86,7 kg.

No. IPS17B – Puller set with MB5 metal box. Wt., 96,7 kg.

IPS17

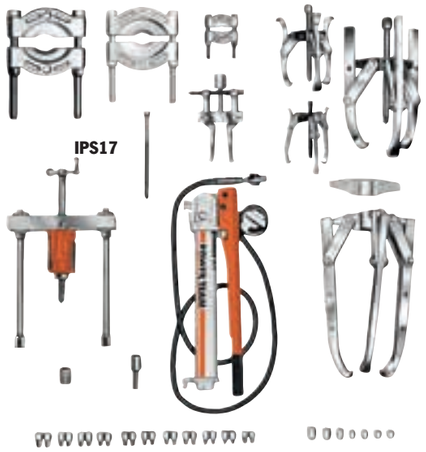

Wooden storage box No. 308435OR9 is included with the sets listed on this page. 1.016L x 406 W x 406 mmD Metal storage boxes also available (see page 209).

IPS17H

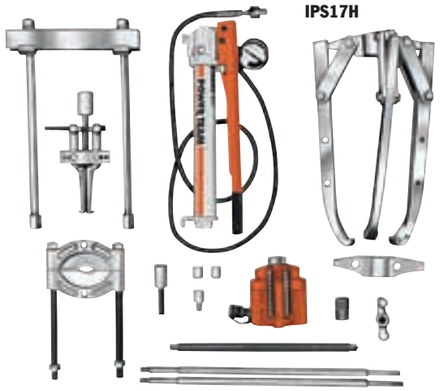

17½ ton hydraulic puller set - This set includes a 3-jaw puller and a Push-Puller®. Ideal for heavy duty applications; put this set to work wherever large gears, bearings, wheels, pulleys, etc. are found.

No. IPS17H – 17½ ton capacity hydraulic puller set. Includes hydraulics, pullers, wooden storage box and accessories listed below. Wt., 62,2 kg.

Contents	Hydraulics	Set Contents	Accessories
P55	Single-stage hyd. hand Pump assembly	**1154**	Bearing cup pulling attach
RT172	17½ ton cylinder with threaded insert	**1122**	Bearing pulling attachment
9798	Hose half coupler	**1123**	Bearing pulling attachment
9767E	Hydraulic hose – 1,8 m	**1130**	Bearing pulling attachment
9670	Tee adapter	**Threaded Adapters**	
9059E	Pressure gauge	**679**	V-belt pulley puling attachment
Pullers		**8005**	⅝" – 18 F. x ⅜" – 16 M. (2)
1062	17½ ton cap. Push-Puller® with 419 mm legs	**8006**	⅝" – 18 F. x ½" – 20 M. (2)
24814	Speed crank	**8007**	⅝" – 18 F. x ½" – 13 M. (2
32118	Adjusting screw	**8010**	⅝" – 18 F. x ⅝" – 11 M. (2)
201923	Pushing adapter	**8013**	⅝" – 18 F. x ¾" – 16 M. (2)
1105	572 mm legs (pr)	**8015**	⅝" – 18 F. x ¾" – 10 M. (2)
1066	17½ ton 3-jaw hyd. puller	**8017**	⅝" – 18 F. x ⅞" – 14 M. (2)
1027	Combination 2/3-jaw puller	**8018**	⅝" – 18 F. x ⅞" – 9 M. (2)
41224	17½ ton 2-jaw puller head	**8019**	⅝" – 18 F. x 1" – 14 M. (2)
24832	Puller screw	**8020**	1" – 8 F. x ⅝" – 18 M. (1)
1037	Combination 2/3-jaw puller	**8021**	1" – 8 F. x 1" – 14 M. (1)
1041	Combination 2/3-jaw puller	**8044**	Female threaded adapter set
28228	Cylinder cap	**8038**	⅝" – 18 F. x ¾"–16 F. (2)
		8056	Set of 6 shaft protectors (8050-8055)
		8075	Set of 11 adaptors (8057-8067)

Contents	Hydraulics	Contents	Accessories
P55	Single-stage hydraulic hand pump assembly	**1154**	Bearing cup pulling attach.
RT172	17½ ton cylinder with threaded insert	**1130**	Bearing pulling attachment
9798	Hose half coupler	**1105**	572 mm legs (pr)
9767E	Hydraulic hose – 1,8 m	**24814**	Speed crank
9670	Tee adapter	**28228**	Screw cap
9059E	Pressure gauge	**32118**	Adjusting screw
		201454	Pushing adapter
		41224	2-jaw head for 1066
Pullers		**Threaded Adapters**	
1062	17½ ton cap. Push-Puller with 419 mm legs	**8020**	1" – 8 F. x ⅝" – 18 M. (1)
1066	17½ ton 3-jaw hyd. puller	**8038**	⅝" – 8 F. x ¾" – 16 F. (1)

30 ton capacity puller set – Just what you need for those big jobs. Not only do you get a 30 ton hydraulic Push-Puller®, you also get a 2-jaw and 3-jaw hydraulic puller. Plus, many popular accessories and the hardware to tackle the big jobs right away.

No. IPS30H – 30 ton capacity hydraulic maintenance puller set. Includes hydraulics, pullers, wooden storage box and accessories listed below. Wt., 150 kg.

IPS30H

Contents	Hydraulics	Contents	Pullers
P55	Single-stage hydraulic hand pump assembly	**1074**	30 ton, 3-jaw hyd. puller
RT302	30 ton cylinder with threaded insert	**41226**	2-way head for 1074
9798	Hose half coupler	**1070**	30 ton cap. hydraulic Push-Puller® with 457 mm legs
9767E	Hydraulic hose – 1,8 m	**1111**	711 mm legs for 1070
9670	Tee adapter	**27198**	Speed crank
9059E	Pressure gauge	**28229**	Screw cap
Accessories		**34510**	Pushing adapter
8036	Female threaded adapters 1" – 14F. x 1" – 14F. (2)	**34758**	Adjusting screw
1166	Bearing cup pulling attach.		
1127	Bearing pulling attachment		

Note: Wooden storage box No. 3084380R9 is provided with the sets listed on this page. 1180L x 615H x 579D Metal storage boxes also available (see page 209).

50 ton capacity puller set - For those really big jobs, this 50 ton puller set is what you need. Just think of the jobs you can do with a 50 ton hydraulic Push-Puller®, a 2-jaw and a 3-jaw puller, both with a 50 ton capacity. Of course, you also get many versatile accessories and attachments.

No. IPS50H – 50 ton capacity hydraulic maintenance puller set. Includes hydraulics, pullers, wooden storage box and accessories listed below. Wt., 261 kg.

IPS50H

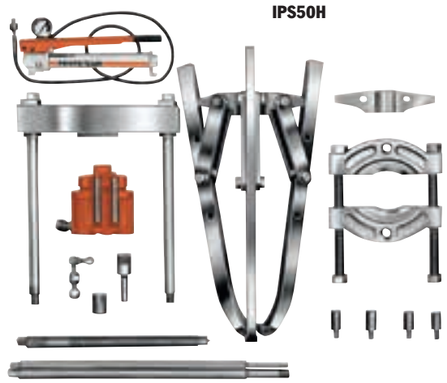

No.	Hydraulics	No.	Pullers
P55	Single-stage hydraulic hand pump assembly	**1080**	50 ton, 3-jaw hyd. puller
RT503	50 ton cylinder with threaded insert	**50449**	2-way head for 1080
9798	Hose half coupler	**1076**	50 ton cap. hydraulic Push-Puller® with 610 mm legs
9767E	Hydraulic hose – 1,8 m	**1113**	864 mm legs for 1076
9670	Tee adapter	**29595**	Speed crank
9059E	Pressure gauge	**28230**	Screw cap
Threaded Adapters		**34755**	Pushing adapter
8024 (2)	1¼" – 12F. x 1¾" – 12M.	**32698**	Adjusting screw
8028	1⅝" – 5½ F. x 1" – 8M.	**Accessories**	
8029	1⅝" – 5½ F. x 1" – 14M.	**1128**	Bearing pulling attachment

⚠ **CAUTION:** All the items shown may not withstand the full tonnage specified. Example: When an accessory with a 1 ton capacity is used with a 7 ton puller, the setup can be used only at a force of 1 ton.

PULLERS

Puller Sets
HYDRAULIC

17½, 30 Ton & 50 Ton

PULLERS

IPS3017

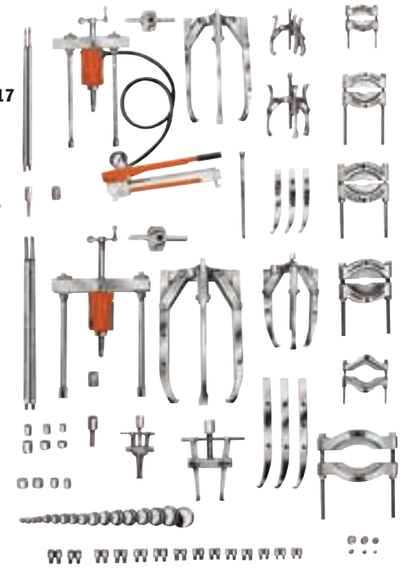

17½ and 30 ton capacity puller sets – These heavy-duty maintenance sets will more than pay for themselves, especially in saving you costly damage to parts. This set lets you tackle hundreds of applications where pushing and pulling are required.
No. IPS3017 – 17½ and 30 ton capacity manual and hydraulic puller set. Includes hydraulics, pullers, and accessories listed below. Wt., 244 kg.
No. IPS3017B – Puller set with MB8 metal box. Wt., 256 kg.

Note: Wooden storage box No. 3084360R9 is provided with this set.
1.016 L x 432 H x 610 mm D
Metal storage boxes also available (see page 209).

2-jaw puller reaches through spokes of gear to grip hub. Hand pump supplies hydraulic power.

Flexible coupler is removed from electric motor shaft with 2-jaw puller.



Typical setup for removing sprocket drive pinion shaft. Puller screw is attached to shaft by threaded adapter. Shaft is now ready to be pulled out hydraulically.

No.	Hydraulics	No.	Accessories
P55	Single-stage hyd. hand pump assembly	24832	Special puller forcing screw
RT172	17½ ton center-hole twin cylinder w/ threaded insert	8075	Step plate adapter set
RT302	30 ton center-hole twin cylinder w/ threaded insert	8076	Step plate adapter set
9798	Hose half coupler	8056	Shaft protector set
9767E	Hydraulic hose – 1,8 m	679	Pulley pulling attachment
9670	Tee adapter	680	Pulley pulling attachment
9059E	Pressure gauge	1154	Bearing cup pulling attach.
	Pullers	1166	Bearing cup pulling attach.
1062	17½ ton cap. hydraulic Push-Puller® w/419 mm legs	1122	Bearing pulling attachment
1070	30 ton cap. hydraulic Push-Puller® w/457 mm legs	1123	Bearing pulling attachment
1066	17½ ton 3-jaw hyd. puller	1126	Bearing pulling attachment
1074	30 ton 3-jaw hyd. puller	1130	Bearing pulling attachment
41224	17½ ton 2-jaw puller head		**Threaded Adapters**
41226	30 ton 2-jaw puller head	8005	⅝" – 18 F. x ⅜" – 16 M. (2)
1027	Combination 2/3-jaw puller	8006	⅝" – 18 F. x ½" – 20 M. (2)
1037	Combination 2/3-jaw puller	8007	⅝" – 18 F. x ½" – 13 M. (2)
1041	Combination 2/3-jaw puller	8010	⅝" – 18 F. x ⅝" – 11 M. (2)
43892	Long jaws (3) for 1037	8012	1" – 14 F. x ⅝" – 18 M. (2)
30902	Long jaws (3) for 1041	8013	⅝" – 18 F. x ¾" – 16 M. (2)
1105	572 mm legs for 1062	8015	⅝" – 18 F. x ¾" – 10 M. (2)
1111	711 mm legs for 1070	8017	⅝" – 18 F. x ⅞" – 14 M. (2)
24814	Speed crank	8018	⅝" – 18 F. x ⅞" – 9 M. (2)
27198	Speed crank	8019	⅝" – 18 F. x 1" – 14 M. (2)
28229	Screw cap	8020	1" – 8 F. x ⅝" – 18 M. (1)
28228	Cylinder cap	8021	1" – 8 F. x 1" – 14 M. (1)
32118	Adjusting screw	8025	1¼" – 7 F. x ⅝" – 18 M. (2)
34758	Adjusting screw	8027	1¼" – 7 F. x 1" – 14 M. (2)
34510	Pushing adapter	8036	1" – 14 F. x 1" – 14 F. (2)
201923	Pushing adapter	8038	⅝" – 18 F. x ¾" – 16 F. (2)
		8044	Female threaded adapter set

⚠ **CAUTION**: All the items shown may not withstand the full tonnage specified. Example: When an accessory with a 1 ton capacity is used with a 7 ton puller, the setup can be used only at a force of 1 ton.

IPS5017

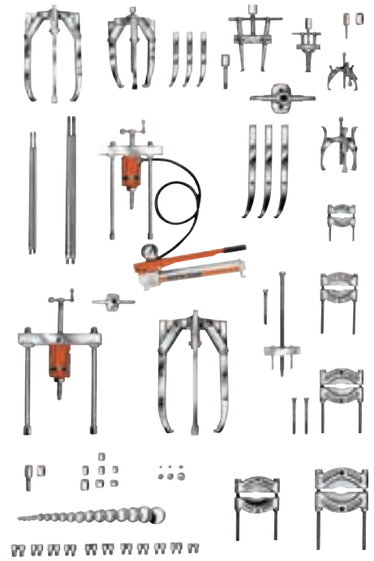

17½ and 50 ton capacity puller sets – If your looking for a maintenance puller set that will handle a wide variety of applications, this is the one for you. The mechanical and hydraulic pullers and attachments are designed to handle most removing and installing jobs with a minimal amount of effort.
No. IPS5017 – 17½ and 50 ton capacity manual and hydraulic puller set. Includes hydraulics, pullers, wooden storage box and accessories listed below. Wt., 405 kg.
No. IPS5017B – Puller set with MB16 metal box. Wt., 415 kg.

Note: Wooden storage box No. 3084360R9 is provided with this set.
1143 L x 572 H x 762 mm D
Metal storage boxes also available (see page 209.

No.	Hydraulics	No.	Accessories
P55	Single-stage hyd. hand pump assembly	8075	Step plate adapter set
RT172	17½ ton center-hole twin cylinder w/ threaded insert	8076	Step plate adapter set
RT503	50 ton center-hole twin cylinder w/ threaded insert	8056	Shaft protector set
9798	Hose half coupler	1154	Bearing cup pulling attach.
9767E	Hydraulic hose – 1,8 m	1166	Bearing cup pulling attach.
9670	Tee adapter	1122	Bearing pulling attachment
9059E	Pressure gauge	1123	Bearing pulling attachment
	Pullers	1126	Bearing pulling attachment
1062	17½ ton cap. hydraulic Push-Puller® w/419 mm legs	1130	Bearing pulling attachment
1076	50 ton cap. hydraulic Push-Puller® w/610 mm legs	34479	Reducing adapter for 1166
1066	17½ ton 3-jaw hyd. puller	10215	Hex nut; ¾" – 16 (2)
1080	50 ton 3-jaw hyd. puller	24829	Short bolt
41224	17½ ton 2-jaw puller head		**Threaded Adapters**
50449	50 ton 2-jaw puller head	8005	⅝" – 18 F. x ⅜" – 16 M. (2)
1027	Combination 2/3-jaw puller	8006	⅝" – 18 F. x ½" – 20 M. (2
1037	Combination 2/3-jaw puller	8007	⅝" – 18 F. x ½" – 13 M. (2)
1041	Combination 2/3-jaw puller	8010	⅝" – 18 F. x ⅝" – 11 M. (2)
43892	Long jaws (3) for 1037	8013	⅝" – 18 F. x ¾" – 16 M. (2)
30902	Long jaws (3) for 1041	8015	⅝" – 18 F. x ¾" – 10 M. (2)
1105	572 mm legs for 1062	8019	⅝" – 18 F. x 1" – 14 M. (2)
1113	864 mm legs for 1076	8020	1" – 8 F. x ⅝" – 18 M. (1)
24814	Speed crank	8021	1" – 8 F. x 1" – 14 M. (1)
29595	Speed crank	8023	1¼" – 12 F. x 1" – 14 M. (2)
28228	Screw cap	8028	1⅝" – 5½ F. x 1" – 8 M. (1)
28230	Cylinder cap	8029	1⅝" – 5½ F. x 1" – 14 M. (1)
32118	Adjusting screw	8038	⅝" – 18 F. x ¾" – 16 F. (1)
32698	Adjusting screw	8044	Female threaded adapter set
34755	Pushing adapter		
201923	Pushing adapter		
7392	Gear and pulley puller		
24833	Forcing screw for 7392		

⚠ **CAUTION:** All the items shown may not withstand the full tonnage specified. Example: When an accessory with a 1 ton capacity is used with a 7 ton puller, the setup can be used only at a force of 1 ton.

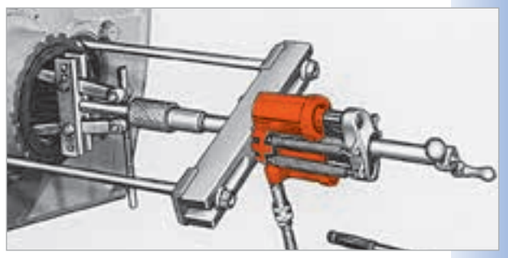

Combination of 50 ton capacity Push-Puller and cup pulling attachment simplifies the removal of a final drive axle seal.

Hydraulically powered Push-Puller removes drive wheel. Pulling attachment is used to provide gripping surface.

3-jaw puller provides grip while hydraulic hand pump provides power to push shaft from housing. Shaft protector is used on end of puller screw.

PULLERS

Puller Sets
HYDRAULIC

17½, 30 & 50 Ton

17½, 30 & 50 ton capacity puller set – Here's the ultimate in industrial puller sets! You'll find a puller for just about every job. Included in this "master set" are 17½, 30 and 50 ton hydraulics, along with an extensive assortment of pullers, attachments and adapters.

No. IPS5317 – 17½, 30 and 50 ton capacity manual and hydraulic puller set. Includes hydraulics, pullers, wooden storage box and accessories listed below. Wt., 572 kg.

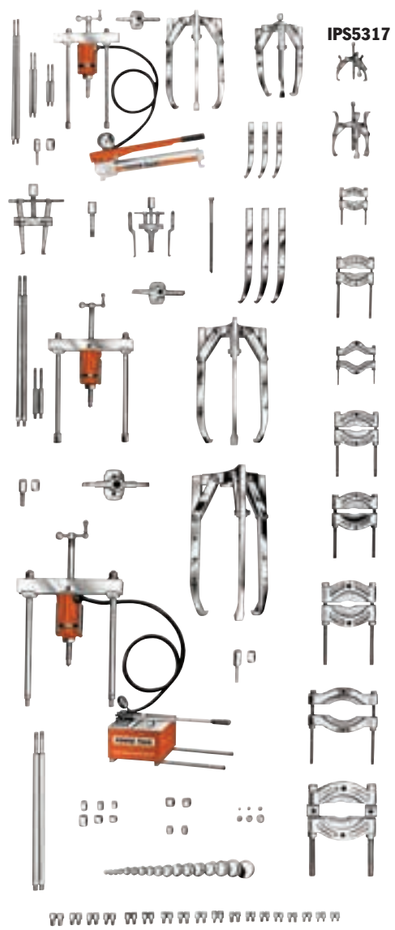

Note: Wooden storage box No. 3084400R9 is provided with this set.
1168 L x 571H x 571 mm D
Metal storage boxes also available (see page 207).

Contents	Hydraulics
P55	Single-stage hyd. hand pump assembly
P460	Two-stage hyd. hand pump w/ 3-way control valve
RT172	17½ ton center-hole twin cylinder w/ threaded insert
RT302	30 ton center-hole twin cylinder w/ threaded insert
RT503	50 ton center-hole twin cylinder w/ threaded insert
9798	Hose half coupler (2)
9767E	Hydraulic hose – 1,8 m (2)
9670	Tee adapter
9059E	Pressure gauge
	Pullers
1062	17½ ton cap. hydraulic Push-Puller® w/419 mm legs
1070	30 ton cap. hydraulic Push-Puller® w/457 mm legs
1076	50 ton cap. hydraulic Push-Puller® w/610 mm legs
1066	17½ ton 3-jaw hyd. puller
1074	30 ton 3-jaw hyd. puller
1080	50 ton 3-jaw hyd. puller
41224	17½ ton 2-jaw puller head
41226	30 ton 2-jaw puller head
50449	50 ton 2-jaw puller head
1027	Combination 2/3-jaw puller
1037	Combination 2/3-jaw puller
1041	Combination 2/3-jaw puller
43892	Long jaws (3) for 1037
30902	Long jaws (3) for 1041
32136	Long jaws (3) for 1154
1105	572 mm legs for 1062
1106	241 mm legs for 1062
1107	114 mm legs for 1062
1109	203 mm legs for 1070
1111	711 mm legs for 1070
1113	864 mm legs for 1070
	Accessories
24832	Special puller forcing screw
24814	Speed crank
27198	Speed crank
29595	Speed crank
28228	Screw cap
28229	Screw cap

Contents	Accessories
28230	Screw cap
32118	Adjusting screw
32698	Adjusting screw
34758	Adjusting screw
34510	Pushing adapter
34755	Pushing adapter
201923	Pushing adapter
8075	Step plate adapter set
8076	Step plate adapter set
8056	Shaft protector set
679	Pulley pulling attachment
680	Pulley pulling attachment
1154	Bearing cup pulling attach.
1166	Bearing cup pulling attach.
1122	Bearing pulling attachment
1123	Bearing pulling attachment
1126	Bearing pulling attachment
1127	Bearing pulling attachment
1128	Bearing pulling attachment
1130	Bearing pulling attachment
34479	Reducing adapter
	Threaded Adapters
8005	⅝" – 18 F. x ⅜" – 16 M. (2)
8006	⅝" – 18 F. x ½" – 20 M. (2)
8007	⅝" – 18 F. x ½" – 13 M. (2)
8010	⅝" – 18 F. x ⅝" – 11 M. (2)
8012	1" – 14 F. x ⅝" – 18 M. (2)
8013	⅝" – 18 F. x ¾" – 16 M. (2)
8015	⅝" – 18 F. x ¾" – 10 M. (2)
8017	⅝" – 18 F. x ⅞" – 14 M. (2)
8018	⅝" – 18 F. x ⅞" – 9 M. (2)
8019	⅝" – 18 F. x 1" – 14 M. (2)
8020	1" – 8 F. x ⅝" – 18 M. (1)
8021	1" – 8 F. x 1" – 14 M. (1)
8023	1¼" – 12 F. x 1" – 14 M. (2)
8024	1¼" – 12 F. x 1¾" – 12 M. (2)
8025	1¼" – 7 F. x ⅝" – 18 M. (2)
8027	1¼" – 7 F. x 1" – 14 M. (2)
8028	1⅝" – 5½ F. x 1" – 8 M. (1)
8029	1⅝" – 5½ F. x 1" – 14 M. (1)
8036	1" – 14 F. x 1" – 14 F. (2)
8038	⅝" – 18 F. x ¾" – 16 F. (2)
8044	Female threaded adapter set

⚠ **CAUTION:** All the items shown may not withstand the full tonnage specified. Example: When an accessory with a 1 ton capacity is used with a 7 ton puller, the setup can be used only at a force of 1 ton.

Bearing
PUSHERS

8 Ton

These pushers are ideal for installing a wide variety of press-fit parts, including bushings, wheels, bearings, gears, and pulleys. Applications for the pushers will be found in motor repair shops, steel mills, mines, quarries, shipyards, utilities, maintenance shops, agricultural machinery repair, and the list goes on.

- Power Team, a leader in hydraulic tools for over 80 years, now adds patented, pushing systems to the world's most complete line of innovative equipment.
- Power Team pushers have been rigorously tested for top performance and reliability at maximum capacity.
- These pushing systems are covered by Power Team's exclusive Lifetime Marathon Warranty — assuring you of the highest quality and reliability.

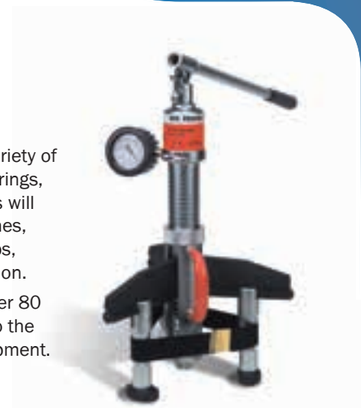



BEARING PUSHER KITS

- Portable pushing kits include an external Grip-O-Matic puller, an internal puller, hydraulic cylinder, and a tri-section pulling attachment, all in one compact, lightweight unit complete with carrying case.

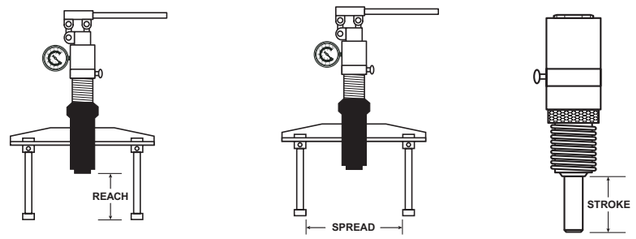

Order No.	Description	Cylinder Capacity	Reach (mm)	Spread (mm)	Stroke	Weight with Case (kg)
PHP8H	Manual-Hydraulic Pusher	8 tons	55-385	58-270	82	33.5
PHP8R	Remote Hydraulic Pusher	8 tons	55-385	58-270	82	33
PHP8H-1	Manual-Hydraulic Pusher/Puller Kit	8 tons	55-385	58-270	82	53
PHP8R-1	Remote Hydraulic Pusher/Puller Kit	8 tons	55-385	58-270	82	52

IMPORTANT SAFETY INFORMATION: Power Team recommends the use of protective blankets for all pushing operations. For ease of visual clarity, we have shown the pusher application photos without these safeguards.

Universal Puller

55 Ton & 100 TON
"Enforcer 55"
& Enforcer 100

PULLERS

ENFORCER 55

1. Hydraulic lift system for easy, precise position of puller.
2. Unique dual pump arrangement: Low pressure pump positions, holds and opens jaws. The high pressure pump advances and retracts the pushing cylinder without releasing clamped jaws.
3. Hydraulically-actuated jaws. Cylinder moves in or out to provide a safe, secure grip on workpiece.
4. Puller can be assembled in 2 or 3 jaw configurations.
5. Choice of cylinder with a 159 mm or 337 mm stroke.
6. Self-centering: Center cylinder on work; puller jaws will automatically grip work evenly.
7. Super Grip-O-Matic® feature means the harder the pull, the tighter the puller jaws grip. No chains or cages required to keep puller jaws from slipping or springing off the part being pulled.
8. Guards at pinch points protect operator.
9. Cart's swivel casters give ease of mobility.
10. Large wheels make movement of cart easy.
11. Puller can be mounted on cart 90 degrees to right or left of puller cart centerline, permitting use in tight quarters, such as between machinery.

Note: Four cylinder extensions (not pictured) are included. The included lifting eyes (not pictured) permit use of an overhead crane to raise entire assembly.

Conversion kit No. 251468 – Kit converts PH553C series to PH5532CL series. Jaws are 305 mm longer. Kit contains three jaws and six straps with guards. Wt., 114 kg.

Pushing Adapters

Order No.	A (mm)	B (mm)	Qty.*
251002	69,9	69,9	1
350593	69,9	152,4	2
350594	69,9	76,2	1
350637	69,9	254	1



*Number of adapters supplied with each Enforcer.

(251002)

Order No.	Min. Spread (mm)	Reach Min. Spread (mm)	Max. Spread (mm)	Reach Max. Spread (mm)	Overall Length* (mm)	Cyl. Stroke (mm)	Power Source Requirements	Prod. Wt. (kg.)	Puller Jaw Tip Dimensions A (mm)	B (mm)	C (mm)
PH553C-E220	101,6	559	1.219	356	2.286	159	230 V, 50 Hz, 15 Amp Cap.	339			
PH553C13-E220	101,6	381	1.219	178	2.286	337	230 V, 50 Hz, 15 Amp Cap.	352			
PH553CL-E220	63,5	829	1.149	737	2.591	159	230 V, 50 Hz, 15 Amp Cap.	366			
PH553CL13-E220	63,5	651	1.149	559	2.591	337	230 V, 50 Hz, 15 Amp Cap.	379			



Note: See other pulling attachmnts on page201
Note: Cart and Puller (cart width is 813 mm)

Also available in 110 Volt

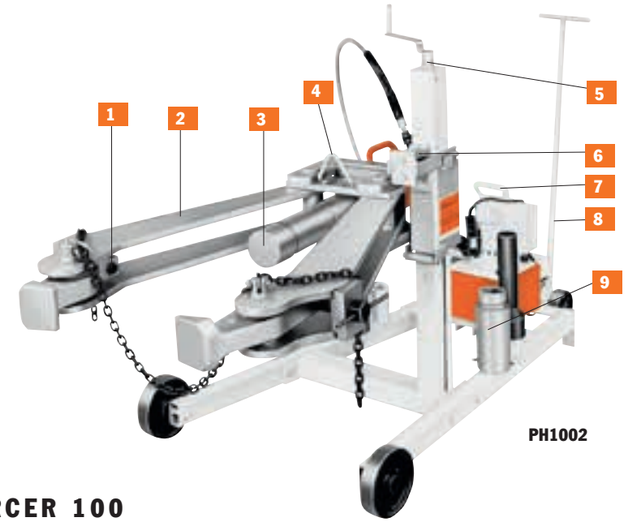

ENFORCER 100

1. Adjustable jaws mean they always pull on a flat surface. Retaining chain holds jaws in place during positioning.
2. Grip-O-Matic® feature means jaws grip progressively tighter as more pulling force is applied.
3. 100 ton hydraulic cylinder is single-acting, spring return type with a maximum working pressure of 700 bar.
4. Lifting bracket allows puller to be lifted if the workpiece center is more than 914 mm off the floor.
5. Adjusting screw allows operator to move vertical position of the puller.
6. Spring loaded feature means Enforcer 100 will align itself on uneven pulls.
7. Hydraulic pump is a 2-stage, high pressure unit controlled by remote hand switch with 7,6 m cord.
8. Tow bar provides puller with plenty of mobility.
9. Pushing adapters have a diameter of 105 and 63,5 mm.

An ideal puller for steel mills, mines, oil fields, utility projects, paper mills, construction sites, railroads, airline shops, shipyards or anywhere else where large equipment and machinery pose tough maintenance challenges.

"Enforcer 100" universal puller –
No. PH1002 – 100 ton, 2-jaw universal hydraulic puller. Includes: 2-jaw Grip-O-Matic® puller, PE552S-E220 2-speed electric/hydraulic power unit, C10010C 100 ton hydraulic cylinder with 260 mm stroke and six adapters. Wt., 404 kg.
No. PH1002J – Same as PH1002-E220, but without hydraulic power unit. Wt., 375 kg.
PE552S-E220 – Pump only. 0,84 KW, 220 volt, 50Hz, single phase, draws 13 amps at full load.
Also available in 115 volt, 50/60Hz.

Note: For 115 volt, 50/60Hz applications, order Part No. PH1002



Ram extensions



Order No.	Adapter Type	included w/puller	Amount J (mm)	K (mm)	L (mm)	M (mm)	N (mm)
44745	Push	1	105	–	343	63,5	–
44766	Ext.	4	105	–	–	–	203
303045	Push	1	105	79,4	–	–	–

Order No.	Min. Spread A (mm)	Reach Min. Spread B (mm)	Max. Spread C (mm)	Reach Max. Spread D (mm)	Puller Jaw Tip E (mm)	F (mm)	G (mm)	Cylinder Height H (mm)	Vertical Stroke Adjust. (mm)	Overall Length (mm)	Max. Thickness Workpiece (mm)	Wheel Dia. (mm)	Power Source Requirements
PH1002-E220	381	1.067	1.219	864	25,4	57,1	127	260	305-914	2.388	305	260	220 V, 50 Hz, 13 Amp Cap.
PH1002J	381	1.067	1.219	864	25,4	57,1	127	260	305-914	2.388	305	260	–

PULLERS

Roller Bearing
PULLER/INSTALLER

(Railroad Edition)
100 Ton Pulling Capacity

- Quickly remove or install tapered roller bearings.
- Designed with cooperation of major bearing manufacturers.
- It's a fast, simple, one-man operation with 100-tons of pulling force provided.
- Completely portable for easy, convenient positioning and out-of-the-way storage.
- The standard in most wheel shops.

Universal railroad axle journal roller bearing puller/installer – For years, the standard in most wheel shops. Power Team now has four models to choose for greater flexibility. With both sling and jack models available and two pumps to choose from, you can tailor the unit to match your needs. With the proper equipment and know-how, removal and installation of axle journal roller bearings takes an absolute minimum of time and effort.

Each unit will service a full line of bearings with rotating end caps, from class B thru GG. No other method can match Power Team's simplicity. Removal is very easy. Simply remove the end caps, slip the pulling shoe between the bearings and the wheel, actuate the pump, and in seconds, 100 tons of pulling force removes the bearing. Installation is just as easy! Each unit is CSA certified (LR19814) and comes complete with a heavy-duty 100-ton hydraulic cylinder, 10,000 P.S.I. (700 bar) pump with remote control solenoid valve, hydraulic pressure gauge (No. 11543), a pulling shoe and installing tube.

Our roller bearing pullers are ideal for replacing tough, worn-out bearings on RR freight cars.

The photo above shows the Universal Puller in position on the roller bearing assembly, which is ready for removal.

Order No.	Model Type	Cylinder Type	Valve Type	Pump Information kW	Phase	Voltage
PR2100J-E220 †	Jack	Double Acting	Solenoid	1,5**	1	230*
PR3100J-E380 †	Jack	Double Acting	Solenoid	2,2	3	400*
PR2100S-E220 †	Sling	Double Acting	Solenoid	1,5	1	230*
PR3100S-E380 †	Sling	Double Acting	Solenoid	2,2	3	400*

* Prewired at factory for this voltage. Other voltages available upon request.
** The 1,49 Kw, 115 volt requires 30 amp service.

Tooling order information - IMPORTANT...This tooling chart applies only to standard AAR configurations for freight care applications. In order to provide adapters needed to service housing-type locomotive and passenger car bearings, as well as metric bearings, Power Team must be provided with the following information: bearing manufacturer's name and general arrangement drawing number, size of bearing to be serviced, railroad name and location and part numbers of adapters already in your possession if you currently own a Puller/Installer.

Tool Description	Class and size of bearing assembly TBU & SP "Metric Tooling" 120	130	140	150
Pulling Shoe Insert Adapter	No. 351830	No. 30512	No. 30521	No. 30520
Guide Tube & Cap Screw Assembly	No. 253341	No. 253342	No. 253343	No. 253344
Cap Screw**	No. 253339	No. 253394	No. 253339	No. 253395
Guide Tube Adapter	No. 21247	No. 21247	No. 21247	No. 21247
Installing Tube Adapter Ring	No. 253335	No. 253336	No. 253337	No. 253338

** Screws are supplied with the guide tube and should be ordered as replacements only.

PR3100J

PR3100S

Tool Description	Class B 108 x 203 (No.)	Class C 127 x 229 (No.)	Class D 140 x 254 (No.)	Class E 152 x 279 (No.)	Class EE 140 Axle. (No.)	Class EE 152 Axle. (No.)	Class F 165 x 305 (No.)	Class G 178 x 305 (No.)	Class G 165 Axle. (No.)	Class GG 165 Axle. (No.)
	Class and size of bearing assembly to be serviced									
Pulling Shoe	No. 420845 is included as part of basic machine – Do Not Order							420846	420846	420846
Pulling Shoe Insert Adapter	30522	30512	30521	30520	30520	30519	30519	–	–	–
Guide Tube & Cap Screw Assembly	253313	253314	253317	253318	253316	253327	253320	253321	253319	253323
Cap Screw**	253156	253349	253308	253155	253307	253308	253310	253326	253309	253309
Guide TubeNo. Adapter	23934	21248	21248	21247	21247	21247	21247	21247	21247	21247
Installing Tube	No. 30416 is included as part of basic machine – Do Not Order							30417	30417	30417
Installing Tube Adapter Ring	21242	21258	21256-1	21255-1	21255-1	21257-1	21257-1	30586	30585	30585

Note: Adapters listed above are for servicing the following roller bearing assemblies: Brenco "Crown-Taper", New Departure-Hyatt "Hy-Roll Taper", SKF "Expediter" and Timken "AP".

** Screws are supplied with the guide tube and should be ordered as replacements only.

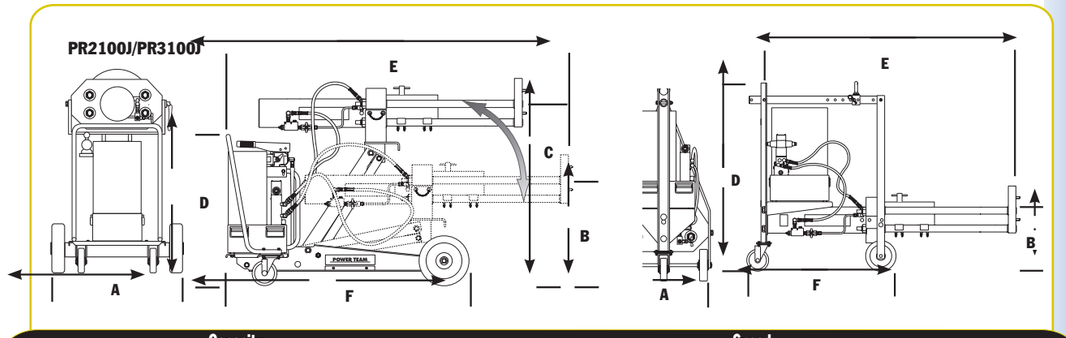

Order No.	Stroke (mm)	Capacity Pull (Tons)	Inst. (Tons)	Speed Advance (mm/min.)	Pull (mm/min.)	Inst. (mm/min.)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Weight (kg)
PR2100J	394	100	68	900	81	113	813	383	1.059	912	1.981	1.493	528
PR3100J	394	100	68	900	81	113	813	383	1.059	912	1.981	1.493	520
PR2100S	394	100	68	900	81	113	619	279	–	1.283	1.632	985	455
PR3100S	394	100	68	900	81	113	619	279	–	1.283	1.632	985	458

PULLERS

Drivers

Bearing, Bushing And Seal

27797 Master Set
(Board not included)

No. 27793
Starter Set

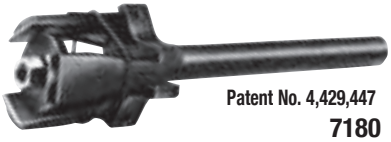

Patent No. 4,429,447
7180

PULLERS

Universal bearing cup installer

This installer adjusts to fit bearing cups from 92 to 165 mm O.D. Replaces over two dozen plates and drivers. Simply adjust the jaws to fit the cup I.D., lock the jaws, slip the new cup on and drive it home with a hammer. Will not damage new bearings.

No. 7180 – Univ. bearing cup installer. Wt., 4,5 kg.

Assemble your own "custom-made" driver tools

These sets include discs and hand-les for custom seal driver assembly to provide a pilot (to prevent cocking), a spacer (so force is applied on the proper area) and a driver (for even force dist.). Discs range from 12,7 thru 114,3 mm diameters in 1,6 mm increments. Each set includes a handy plastic box with pre-cut tool tray.

No. 27793 – Starter Set. Contains handle and discs especially selected to provide the driver sizes most frequently needed. Maximum utility at a modest investment! Wt.,1,8 kg.

No. 27794 – Basic Set. Wide coverage, low investment! Includes 41 discs and two handles. Size range: 12,7 thru 76,2 mm diameter. Wt., 10 kg.

No. 27795 – Big Job Set. Used for servicing large components. You get coverage of 77,8 thru 114,3 mm diameter with the 24 discs and handle provided. Wt., 20,4 kg.

No. 27797 – Master Set. For maximum coverage. Three handle sizes and all 65 discs listed in chart at left are included. Range: 12,7 thru 114,3 mm diameter. Wt., 30,9 kg.

No. 212377 – Tool organizer board. Will accommodate all components of 27793 Starter Set. Tools not included. Wt., 2,3 kg.



These sets have the proper-size driver for any seal, bearing or bushing installing job. Select the proper-size discs, attach to handle with cap screws and strike with hammer.

Order No.	DISCS Inch	MM	Order No.	DISCS Inch	MM	Order No.	DISCS Inch	MM
27492	9/16	14.3	27513†	1 7/8	47.6	27535	3 1/4	82.6
27493†	5/8	15.9	27514	1 15/16	49.2	27536	3 5/16	84.1
27494	11/16	17.5	27515	2	50.8	27537	3 3/8	85.7
27495†	3/4	19.0	27516	2 1/16	52.4	27538	3 7/16	87.3
27496	13/16	20.6	27517	2 1/8	54.0	27539	3 1/2	88.9
27497†	7/8	22.2	27518	2 3/16	55.6	27540	3 9/16	90.5
27498	15/16	23.8	27519	2 1/4	57.2	27541	3 5/8	92.1
27499†	1	25.4	27520	2 5/16	58.7	27542	3 11/16	93.7
27500	1 1/16	27.0	27521	2 3/8	60.3	27543	3 3/4	95.3
27501†	1 1/8	28.6	27522	2 7/16	61.9	27544	3 13/16	96.8
27502	1 3/16	30.2	27523	2 1/2	63.5	27545	3 7/8	98.4
27503†	1 1/4	31.8	27524	2 9/16	65.1	27546	3 15/16	100.0
27504	1 5/16	33.3	27525	2 5/8	66.7	27547	4	101.6
27505†	1 3/8	34.9	27526	2 11/16	68.3	27548	4 1/16	103.2
27506	1 7/16	36.5	27527	2 3/4	69.8	27549	4 1/8	104.8
27507†	1 1/2	38.1	27528	2 13/16	71.4	27550	4 3/16	106.4
27508	1 9/16	39.7	27529	2 7/8	73.0	27551	4 1/4	108.0
27509†	1 5/8	41.3	27530	2 15/16	74.6	27552	4 5/16	109.5
27510	1 11/16	42.9	27531	3	76.2	27553	4 3/8	111.1
27511†	1 3/4	44.4	27532	3 1/16	77.8	27554	4 7/16	112.7
			27533	3 1/8	79.4	27555	4 1/2	114.3

† = Items contained in 27793 starter set.

SET COMPONENTS

Order No.	Description
10012†	1/4"-20 UNC X 22,2mm*
10020†	1/4"-20 UNC X 31,8 mm*
10854†	1/4"-20 UNC X 44,5 mm
10855†	1/4"-20 UNC X 70 mm*
12001†	1/4"-20 UNC X 2 1/4"*
27487†	Small Handle 127 X19mm Dia.
27488	Med. Handle 152 X 41mm Dia.
27489	Large Handle 152 X 41mm Dia.
27490	Extension Tube
7350†	Allen Wrench

SELECTING A PUNCH

The following information is provided as a convenient general reference guide for metal punching operations.

HOLE SIZE VS. MATERIAL THICKNESS

Punching holes in metal is the fast, economical way to get precise hole size, smoothness and minimum burr. Compressive strength of the punch steel determines that the thickness of the metal being punched must not exceed the diameter of the punch. This relationship varies with the type of material. For example: the minimum hole diameter will be 6,4 mm in 6,4 mm mild steel, 6,4 mm in 4,8 mm stainless steel, and 6,4 mm in 7,9 mm aluminum.

MAXIMUM RATED CAPACITY

All punching tools have their maximum capacity for safe, dependable operation over a long life span. The hydraulic punches listed in this catalog have a "rated capacity" based on their design strength. Before selecting a tool, use the following charts to determine the specific tonnage required to punch the size and shape holes through the type and gauge metal considered.

DETERMINING TONNAGES FOR ROUND HOLES

To determine tonnages for hot rolled mild steel (typically used in bar size angle iron, channels, tees and zees) with a 3.500 bar shear strength, read directly from chart #1. Example: To punch a 9,5 mm diameter hole thru 9,5 mm thick mild steel, chart #1 shows 11.1 tons are required. For ASTM A-36 steel (typically used for structural size wide flange, H and I beams, tees and zees) with a 4.200 bar shear strength, read direct from chart #2. Example: To punch a 6,4 mm round hole in 6,4 mm thick A-36 steel, chart #2 shows 5.9 tons of force is needed.

CHART #1 — TONS OF PRESSURE REQUIRED TO PUNCH MILD STEEL

Material Thickness		Round Hole Diameter (mm)											
		3,2	4,8	6,4	7,9	9,5	11,1	12,7	14,3	15,9	17,5	19	20,6
Gauge	(mm)												
20	1/32	.4	.5	.7	.9	1.1	1.2	1.4	1.6	1.8	1.9	2.1	2.3
18	3/64	.5	.7	.9	1.2	1.4	1.6	1.9	2.1	2.4	2.6	2.8	3.1
16	1/16	.6	.9	.6	1.5	1.8	2.1	2.3	2.6	2.9	3.2	3.5	3.8
14	5/64	.7	1.1	1.2	1.8	2.2	2.6	2.9	3.3	3.7	4.0	4.4	4.8
12	7/64	1.0	1.5	1.5	2.6	3.1	3.6	4.1	4.6	5.1	5.7	6.2	6.7
11	1/8	1.2	1.8	2.1	2.9	3.5	4.1	4.7	5.1	5.9	6.2	7.1	7.6
10	9/64	1.3	2.0	2.4	3.3	4.0	4.6	5.3	5.9	6.6	7.3	7.9	8.6
3/16"	3/16	--	2.8	2.6	4.6	5.5	6.4	7.4	8.3	9.2	10.1	11.0	12.0
1/4"	1/4	--	--	3.7	6.1	7.4	8.6	9.8	11.1	12.3	13.5	14.7	16.0
5/16"	5/16	--	--	4.9	7.8	9.2	10.7	12.3	13.9	15.4	17.0	18.5	20.0
3/8"	3/8	--	--	--	--	11.1	12.8	14.8	16.5	18.5	20.2	22.1	23.8
1/2"	1/2	--	--	--	--	--	--	19.7	22.0	24.6	26.9	29.5	31.8

TONS OF PRESSURE

CHART #2 — TONS OF PRESSURE REQUIRED TO PUNCH ASTM-A36 STRUCTURAL STEEL

Material Thickness		Round Hole Diameter (mm)											
		3,2	4,8	6,4	7,9	9,5	11,1	12,7	14,3	15,9	17,5	19	20,6
Gauge	(mm)												
12	7/64	1.2	1.9	2.5	3.1	3.7	4.3	4.9	5.6	6.2	6.8	7.4	8.0
11	1/8	1.4	2.1	2.8	3.5	4.2	4.9	5.7	6.4	7.1	7.8	8.5	9.2
10	9/64	--	2.4	3.2	4.0	4.8	5.6	6.4	7.2	7.9	8.7	9.5	10.3
3/16"	3/16	--	3.3	4.4	5.5	6.6	7.7	8.8	9.9	11.0	12.1	13.2	14.3
1/4"	1/4	--	4.4	5.9	7.4	8.6	10.3	11.8	13.2	14.7	16.2	17.7	19.1
5/16"	5/16	--	--	7.4	9.2	11.0	12.9	14.7	16.5	18.4	20.2	22.0	24.0
3/8"	3/8	--	--	8.8	11.0	13.3	15.5	17.7	19.9	22.1	24.3	26.5	28.7
1/2"	1/2	--	--	--	--	--	--	23.6	26.5	29.4	32.4	35.3	38.3

TONS OF PRESSURE

CHART #3 TONS OF PRESSURE REQUIRED TO SHEAR 25,4 MM LENGTH

Material Thickness	Mild Steel	Stainless Steel	Brass
4,8 mm	0,167	0,276	0,128
6,4 mm	0,246	0,374	0,177
7,9 mm	0,314	0,472	0,216
9,5 mm	0,373	0,560	0,246
11,1 mm	0,432	0,649	0,305
12,7 mm	0,491	0,737	0,344

TONS OF PRESSURE

DETERMINING TONNAGES FOR IRREGULAR SHAPED HOLES

When punching irregular shaped holes (square, obround, etc...) multiply the length of metal to be cut by the multiplier given for a 25,4 mm length of cut in chart #3. Example: The shear length (or total distance around a 12,7 mm square hole) is 50,8 mm. To punch such a hole in 6,4 mm thick mild steel, multiply 50,8 mm x 6.25 (from chart #3) = 12.5 tons. For stainless steel this would be 50,8 mm x 9.5 = 19 tons.

DIE CLEARANCE

The relationship of the larger die hole size to the punch size is die clearance and is stated as a percentage of the thickness of the material being punched. The range of clearances varies from 10% for thin materials to 20% for thicker materials. For 19 mm material, the total die clearance is 3,8 mm. Clearance should always be specified when there is any reason for doubt.
Effects of die clearance are more noticeable in thicker materials (such as 12,7 mm) than in thinner materials (such as 4,8 mm). When ordering die sets, specify the type and thickness of material being punched (see chart #4).

CHART #4 CLEARANCE FOR MILD STEEL

Material Thickness	Approximate Decimal Thickness	Overall Clearance– Add to Punch Size
7 Gauge	4,55	0,5 mm
3/16	4,76	0,58 mm
1/4	6,35	0,94 mm
5/16	7,94	1,2 mm
3/8	9,5	1,45 mm
1/2	12,7	1,90 mm

TONS OF PRESSURE

NOTE: Most grades of half hard aluminum use the same clearance as shown above. In many cases, your own experience may dictate that you call for clearances different from the above, especially when punching other materials such as stainless steel. Special clearances may be ordered for that purpose.

DIE CLEARANCE HAS THE FOLLOWING EFFECTS:

Too much clearance	Too little clearance	Correct Clearance
1. Extra roll-in at top of the hole. 2. Too much burr at bottom of the hole.	1. More punching pressure needed. Can reduce tool life. 2. High stripping force causes part distortion and extra punch wear.	1. Straighter hole thru material. 2. Minimum distortion at top of hole. 3. Minimum burr at bottom of hole.

USE THE 200.300 OR 750 L/MIN TESTER TO SIMULATE ACTUAL OPERATING CONDITIONS OF THE SYSTEM UNDER TEST

Testing the pump: Operator runs engine at a specific rpm and adjusts tester's pressure compensating valve to simulate a work load. By comparing meter readings with manufacturer specs, proper operation of pump can be confirmed. If oil flow and pressure do not meet specs, the pump is faulty. Or, if test results and specifications agree, the operator will know that the problem is elsewhere in the system and that other tests must be performed. Regardless of the component being tested, hook-up and testing is accomplished in minutes. NOTE: These hydraulic testers should always be used with the owner's manual/manufacturers' specifications for the system under test.

BASE MOUNTING HOLES FOR "C"CYLINDERS

Cylinder Tonnage	No. Holes	Thread Size	Thread Depth (mm)	Bolt Circle Diameter (mm)
5	2†	1/4-20	9.5	25.4
10		5/16-18	12.7	39.7
15		3/8-16		47.6
25		1/2-13	19.1	58.7
55				95.3
* Optinonal 75	4	3/4-10	25.4	114.3
* Optinonal 100		1-8		120.7



* Consult Factory (45° from coupler)
† 90° from coupler.

Cyl. Caps furnished with "C" Series Cylinders:

5 ton cylinders	**No. 201375**
10 ton cylinders	**No. 201362**
15 ton cylinders	**No. 201362**
25 ton cylinders	**No. 201412**
55 ton cylinders	**No. 36161**
75 ton cylinders	**No. 36161**
100 ton cylinders	**No. 36161**

PERFORMANCE

The table at right gives you an idea of what to expect when coupling RD series cylinders to a Power Team pump. Actual performance will vary according to job conditions.

Pump	Cylinder	Time to Extend Cylinder 25,4 mm 7 bar	700 bar
PE55	RD55	1.0 sec.	12.0 sec.
	RD100	1.8 sec.	22.5 sec.
	RD200	3.5 sec.	45.0 sec.
	RD400	7.2 sec.	85.0 sec.
PQ120 Series	RD200	3.4 sec.	20.6 sec.
	RD300	4.9 sec.	30.0 sec.
	RD400	6.4 sec.	39.0 sec.
	RD500	8.1 sec.	49.5 sec.
PE400 Series	RD300	3.0 sec.	8.5 sec.
	RD400	3.9 sec.	11.1 sec.
	RD500	4.9 sec.	14.1 sec.

NOTE: Base mounting holes are standard on all RD cylinders. Orientation of base mounting holes to coupler. Orientation on RD300, RD400 & RD500 series is random.



BASE MOUNTING HOLES FOR "RD" CYLINDERS

Tonnage	10	25	55	80	100	150	200	300	400	500
No. of Holes	2	4	4	4	4	4	4	4	4	6
Thread Size	3/8"-16	1/2"-13	5/8"-11	5/8"-11	3/4"-10	1"-8	1 1/4"-7	1 1/4"-7	1 1/2"-12	1 3/8"-12
Depth (mm)	16	19	22	22	25	25	32	44	48	51
B.C. Dia.	51	70	89	114	140	152	165	159	184	203
Orientation	90°	45°	45°	45°	45°	45°	45°	Random	Random	Random

MOUNTING HOLES FOR "RLS" CYLINDERS

RLS50	8,6 mm C'bore x 6,4 mm deep, 5,6 mm thru hole	**RLS200**	15,5 mm C'bore x 10,4 mm deep,10,4 mm thru hole	**RLS500S**	17,8 mm C'bore x 12,7 mm deep,11,9 mm thru hole	**RLS1000S**	20,3 mm C'bore x 14,2 mm deep, 13,5 mm thru hole
RLS100	10,7 mm C'bore x 8,7 mm deep, 7,1 mm thru hole	**RLS300**	15,5 mm C'bore x 11,2 mm deep, 10,4 mm thru hole	**RLS750S**	20,3 mm C'bore x14,2 mm deep, 13,5 mm thru hole	**RLS1500S**	20,6 mm C'bore x 14,2 mm deep, 13,5 mm thru hole

POST TENSION/STRESSING JACK DIMENSIONS

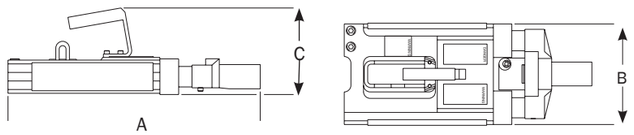

Order Number	A (mm)	B (mm)	C (mm)	Weight (kg)
SJ2010	533	229	165	25
SJ2010	559	259	178	34
SJ3010	559	259	178	34
SJ3010P	559	259	178	34
SJ2010DA	470	190	165	19
SJ3010DA	470	216	165	23

Conversion
FORMULAS

RESOURCES

DECIMAL & MILLIMETER EQUIVALENTS

	DECIMALS	MILLIMETERS
1/64	.015625	– 0.397
1/32	.03125	– 0.794
3/64	.046875	– 1.191
1/16	.0625	– 1.588
5/64	.078125	– 1.984
3/32	.09375	– 2.381
7/64	.109375	– 2.778
1/8	.1250	– 3.175
9/64	.140625	– 3.572
5/32	.15625	– 3.969
11/64	.171875	– 4.366
3/16	.1875	– 4.763
13/64	.203125	– 5.159
7/32	.21875	– 5.556
15/64	.234375	– 5.953
1/4	.2500	– 6.350
17/64	.265625	– 6.747
9/32	.28125	– 7.144
19/64	.296875	– 7.541
5/16	.3125	– 7.938
21/64	.328125	– 8.334
11/32	.34375	– 8.731
	DECIMALS	MILLIMETERS
23/64	.359375	– 9.128
3/8	.3750	– 9.525
25/64	.390625	– 9.922
13/32	.40625	– 10.319
27/64	.421875	– 10.716
7/16	.4375	– 11.113
29/64	.453125	– 11.509
15/32	.46875	– 11.906
31/64	.484375	– 12.303
1/2	.5000	– 12.700
33/64	.515625	– 13.097
17/32	.53125	– 13.494
35/64	.546875	– 13.891
9/16	.5625	– 14.288
37/64	.578125	– 14.684
19/32	.59375	– 15.081
39/64	.609375	– 15.478
5/8	.6250	– 15.875
41/64	.640625	– 16.272
21/32	.65625	– 16.669
43/64	.671875	– 17.066
11/16	.6875	– 17.463
	DECIMALS	MILLIMETERS
45/64	.703125	– 17.859
23/32	.71875	– 18.256
47/64	.734375	– 18.653
3/4	.7500	– 19.050
49/64	.765625	– 19.447
25/32	.78125	– 19.844
51/64	.796875	– 20.241
13/16	.8125	– 20.638
53/64	.828125	– 21.034
27/32	.84375	– 21.431
55/64	.859375	– 21.828
7/8	.8750	– 22.225
57/64	.890625	– 22.622
29/32	.90625	– 23.019
59/64	.921875	– 23.416
15/16	.9375	– 23.813
61/64	.953125	– 24.209
31/32	.96875	– 24.606
63/64	.984375	– 25.003
1	1.000	– 25.400

1 mm = .03937”
.001” = .0254 mm

SI* CONVERSION FORMULAS

APPROXIMATE CONVERSION

MULTIPLY SI* UNIT	BY CONV FACTOR		TO GET OR MULTIPLY NON-SI UNIT	BY CONV FACTOR		TO GET SI* UNIT
LENGTH						
millimeter (mm) (1 inch = 25.4 mm exactly)	X	0.03937	= inch	X 25.4	=	mm
centimeter (cm) 10 mm	X	0.3937	= inch	X 2.54	=	cm
meter (m) 1000 mm	X	3.28	= foot	X 0.305	=	m
meter (m)	X	1.09	= yard	X 0.914	=	m
kilometer (km) 1000 m	X	0.62	= mile	X 1.61	=	km
AREA						
millimeter^2 (mm^2)	X	0.00155	= inch^2	X 645	=	mm^2
centimeter^2 (cm^2)	X	0.155	= inch^2	X 6.45	=	cm^2
meter^2 (m^2)	X	10.8	= foot^2	X 0.0929	=	m^2
meter^2 (m^2)	X	1.2	= yard^2	X 0.836	=	m^2
hectare (ha) 10,000 m^2	X	2.47	= acre	X 0.405	=	ha
kilometer^2 (km^2)	X	0.39	= mile^2	X 2.59	=	km^2
VOLUME						
centimeter^3 (cm^3)	X	0.061	= inch^3	X 16.4	=	cm^3
liter (l)	X	61	= inch^3	X 0.016	=	l
milliliter (ml) ml = 1 cm^3)	X	0.034	= oz-liq	X 29.6	=	ml (1
liter (l) 1000 ml	X	1.06	= quart	X 0.946	=	l
liter (l)	X	0.26	= gallon	X 3.79	=	l
meter^3 (m^3) 1000 l	X	1.3	= yard^3	X 0.76	=	m^3
MASS						
gram (g)	X	0.035	= ounce	X 28.3	=	g
kilogram (kg) 1000 g	X	2.2	= pound	X 0.454	=	kg
metric ton (t) 1000 kg	X	1.1	= ton (short)	X 0.907	=	t

APPROXIMATE CONVERSION

MULTIPLY SI* UNIT	BY CONV FACTOR		TO GET OR MULTIPLY NON-SI UNIT	BY CONV FACTOR		TO GET SI* UNIT
FORCE (N = kg • m/s2)						
newton (N)	X	0.225	= pound	X 4.45	=	N
kilonewton (kN)	X	225	= pound	X 0.00445	=	kN
TORQUE						
newton meter (N•m)	X	8.9	= lb. in.	X 0.113	=	N•m
newton meter (N•m)	X	0.74	= lb. ft.	X 1.36	=	N•m
PRESSURE (Pa = N/m2)						
kilopascal (kPa)	X	4.0	= in. H_2O	X 0.249	=	kPa
kilopascal (kPa)	X	0.30	= in. Hg	X 3.38	=	kPa
kilopascal (kPa)	X	0.145	= p.s.i.	X 6.89	=	kPa
megapascal (MPa)	X	145	= p.s.i.	X 0.00689	=	MPa
Bar	X	14.5	= p.s.i.	X .0689	=	Bar
POWER (w = J/s)						
kilowatt (kw)	X	1.34	= hp	X 0.746	=	kw
kilowatt (kw)	X	0.948	= Btu/s	X 1.055	=	kw
watt (w)	X	0.74	= ft. lb/s	X 1.36	=	w
TEMPERATURE						
°C = (°F - 32) ÷ 1.8	°F = (°C X 1.8) + 32					
FLOW						
cu. cm./min.	X	.061	= cu. in/min.	X 16.4	=	cu. cm./min.
liters/min.	X	.2642	= GPM	X 3.785	=	liters/min.

* System International (Modern Metric System)

Power Team®

Standards

Power Team's commitment to quality is evident in everything we do, from raw material receipt to how we support our customers years after they purchase our products. Power Team is registered to ISO 9001: 2000 international quality standard. ISO 9001: 2000 requires compliance with standards for management, administration, product development, manufacturing and continual improvement. Our Registration verifies that Power Team has adopted and maintains documentation for processes ranging from suppliers to customers, inspection, handling, and training. ISO 9001 also requires periodic internal and external audits to ensure all aspects of work affecting quality control are monitored. This always has been, and will continue to be, our philosophy. That's our guarantee to you.

ISO 9001 CERTIFIED

ASME B30.1

Power Team hydraulic cylinders fully comply with the criteria set forth in the American Society of Mechanical Engineers standard ASME B30.1:

1. Our cylinders are designed to have a minimum of a 2-to-1 safety factor on typical material yield strength;

Each cylinder is tested at 125 percent of rated pressure at full travel and is inspected to assure functionality and freedom from leaks.

ASME B40.1

Power Team heavy-duty pressure gauges are designed in accordance with the recommendations set forth in the American Society of Mechanical Engineers standard ASME B40.1, Grade B.

CE MARK

Power Team is committed to designing, manufacturing, and marketing products that meet or exceed the needs of the customers we serve. Power Team supplies a Letter of Incorporation or a Declaration of Conformity and CE Marking for products that conform with European community directives.

IJ100

Power Team hoses meet the criteria set forth in the Material Handling Institute's specification #IJ100 for hydraulic hose. Under the procedures outlined in this standard, hydraulic hose shall:

1. Have an average minimum life of 30,000 cycles at full rated capacity.

2. Have a minimum burst pressure of at least twice the rated operating pressure.

LR19814

CSA

Where specified, Power Team electric power pump assemblies meet the design, assembly, and test requirements of the Canadian Standards Association. Note: If CSA certification is required, it must be requested at the time the pump is ordered.

NEMA

Where specified, Power Team electric power pump assemblies meet the design, assembly, and test requirements of NEMA 12, a National Electrical Manufacturers' Association standard relating to electrical components used to resist moisture and dust.

POWER TEAM PRODUCT DESIGN CRITERIA

All Power Team brand hydraulic components are designed and/or tested to be safe for use at maximum operating pressures of 700 bar unless otherwise specifically noted.

QUALITY ASSURANCE

All of our hydraulic cylinders are subjected to quality checks during production. All steel bar is certified and has material traceability to the mill. Before leaving the factory, all cylinders are pressure tested to 875 bar, except the RT series which are tested to 700 bar to insure on-the-job reliability. We have made every effort to include the latest specifications for our products in this catalog. Please call the Power Team factory for the most current product specifications. The Power Team Lifetime Marathon Warranty is described in more detail on pgs. 240-241 of this catalog.

Warranty

Warranty

"Power Team" is a registered trademark of the SPX Hydraulic Technologies division of SPX Corporation ("SPX"). All Power Team products and parts, with the exceptions noted below, are warranted against defects in materials and workmanship for the life of the product or part. (The life of the product or part is defined as that point in time when it no longer safely or properly functions due to normal wear). Inflatable jacks, chains, batteries, electric motors, gas engines, knives and cutter blades which are sold with Power Team products are not covered by this warranty and instead are warranted as follows:

• Inflatable jacks and electronics are warranted against defects in materials and workmanship for a period of one year from date of purchase.

• Consumable parts or accessories, including without limitation, chains, batteries, knives and cutter blades are warranted against defects in materials and workmanship for a period of one year from date of purchase.

• All electric motors and gas engines are separately warranted by their respective manufacturer under the terms and conditions stated in their separate warranty.

The foregoing warranties do not cover ordinary wear and tear or any product or part that has been worn out, abused, heated, ground or otherwise altered, used for a purpose other than that for which it was intended or used in a manner inconsistent with any instructions regarding its use.

To qualify for warranty consideration, return the Power Team product, freight prepaid, to a Power Team authorized repair center or to the SPX factory. If any product or part manufactured by SPX found to be defective by SPX, in its sole judgment, SPX will, at its option, either repair or replace such defective product or part and return it via best ground transportation, freight prepaid. THIS REMEDY SHALL BE THE EXCLUSIVE REMEDY AVAILABLE FOR ANY DEFECTS IN THE PRODUCTS OR PARTS MANUFACTURED AND SOLD BY SPX OR FOR DAMAGES RESULTING FROM ANY OTHER CAUSE WHATSOEVER, INCLUDING WITHOUT LIMITATION, SPX'S NEGLIGENCE. SPX SHALL NOT, IN ANY EVENT, BE LIABLE TO ANY BUYER FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES OF ANY KIND, WHETHER FOR DEFECTIVE OR NON-CONFORMING GOODS, NEGLIGENCE, ON THE BASIS OF STRICT LIABILITY OR FOR ANY OTHER REASON.

SPX's Warranty is expressly limited to persons who purchase Power Team products or parts for the resale or for use in the ordinary course of the buyer's business.

THIS WARRANTY IS EXCLUSIVE, AND SPX MAKES NO OTHER WARRANTY OF ANY KIND WHATSOEVER, EXPRESSED OR IMPLIED, WITH RESPECT TO THE PRODUCTS MANUFACTURED AND SOLD BY IT, WHETHER AS TO MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ANY OTHER MATTER. No agent, employee, or representative of SPX has any authority to bind SPX to any affirmation, representation, or warranty concerning Power Team products or parts, except as stated herein.

The purpose of this exclusive remedy shall be to provide the buyer with repair or replacement of products or parts manufactured by SPX found to be defective in materials or workmanship or negligently manufactured. This exclusive remedy shall not be deemed to have failed of its essential purpose so long as SPX is willing and able to replace said defective products or parts in the prescribed manner.

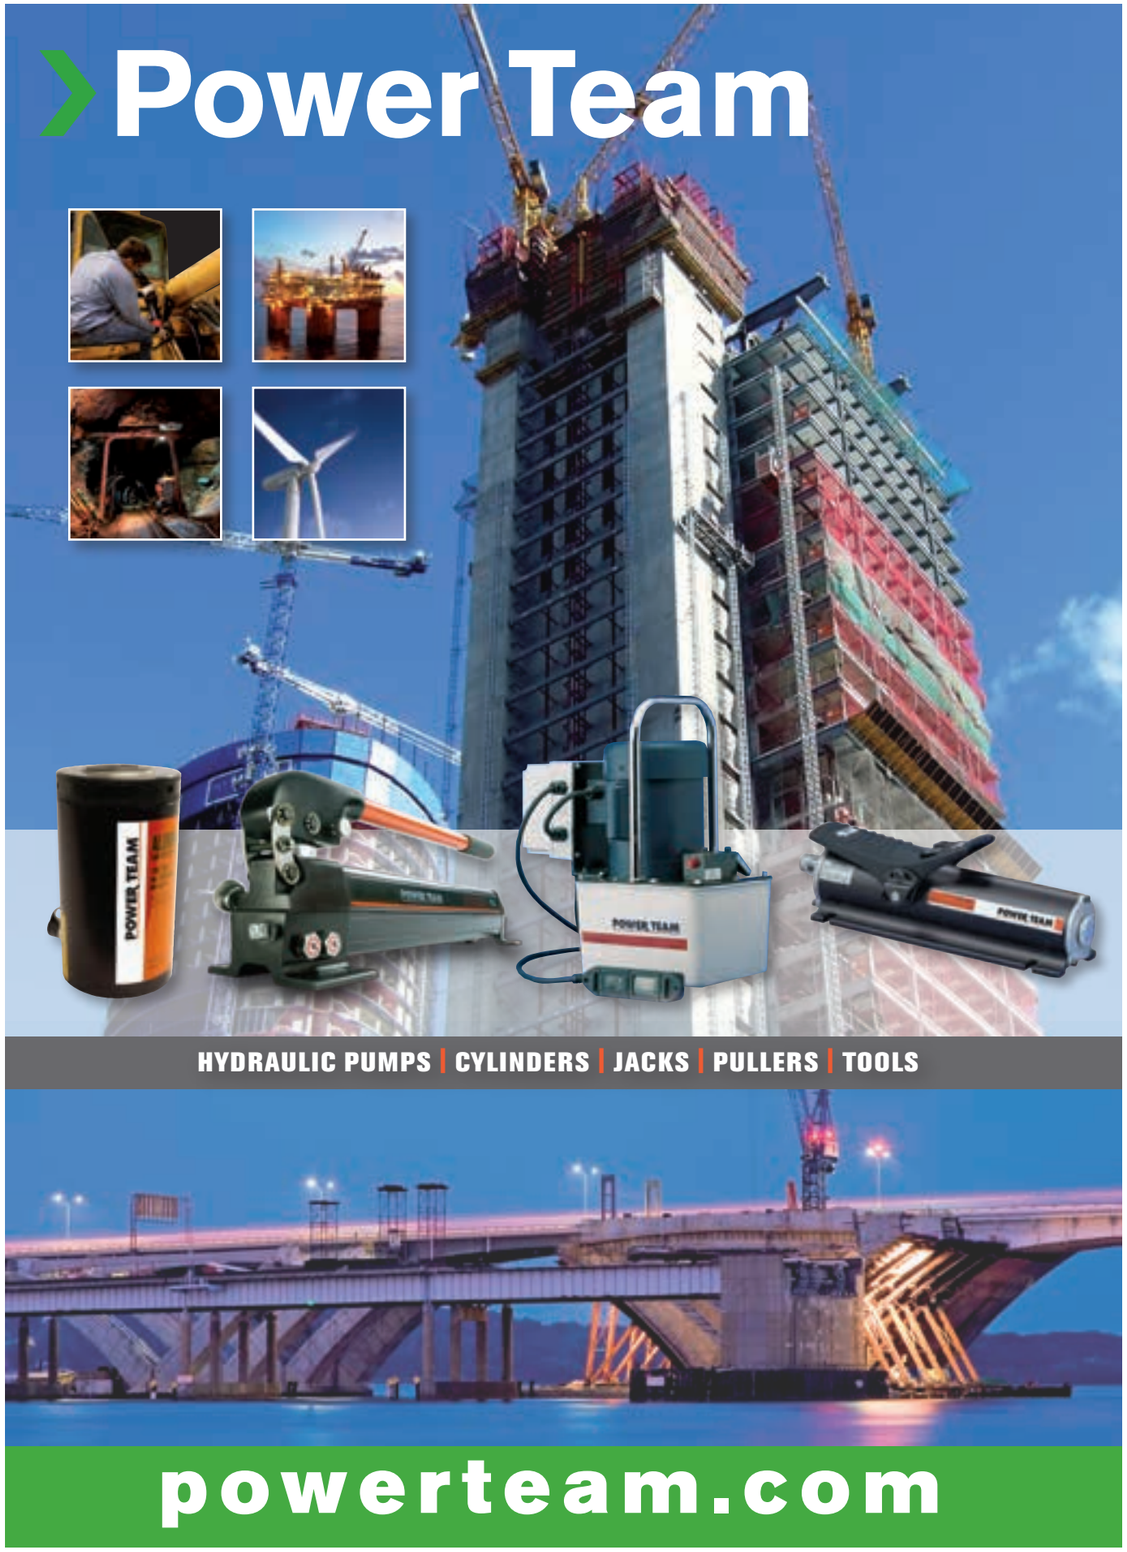

POWER TEAM 150 TON RH1508 CENTER-HOLE RAMS COMBINED WITH PE174 PUMPS, MAINTAIN TENSION FOR THE SUPPORT CABLES FOR THIS BRIDGE IN SEATTLE, WASHINGTON.

Page
CYLINDERS...12-41

Page
PUMPS...42-119

Power Team University

Proper training is needed to operate and maintain hydraulic equipment with safety and efficiency. Power Team offers a range of classes to help you safely operate and maintain your tools.

Safety Training

Workplace safety should be a high priority to assure high-pressure hydraulic tools are used in accordance with recommended safety procedures. Power Team Safety Training Seminars demonstrate the proper methods for operating high-pressure hydraulic tools to avoid equipment damage and lost time accidents. Safety seminars can be conducted at a customer facility, job site or Power Team headquarters.

Maintenance & Repair Training

Maintaining Power Team products in good operating condition enhances operating efficiency and extends service life. This seminar explains the proper methods for keeping Power Team products operating at peak levels of performance and reliability. Topics include understanding hydraulic circuits, product maintenance, trouble-shooting, and field repairs. Three and five day seminars are structured to meet your product knowledge requirements.

Class schedules are posted on powerteam.com. Contact your district sales manager for more details or call **+31 45 5678877**.

SPX®
HYDRAULIC TECHNOLOGIES

Cylinders
P6-P41

Pumps
P42-P119

Accessories
P120-P133

Shop Equipment
P134-P147

Jacks
P148-P163

Hydraulic Tools
P164-P189

Pullers
P190-P230

Resources
P231-P234

CUSTOMER SERVICE CENTERS

North America Customer Service Center
Rockford, Illinois USA
5885 11th Street
Rockford, IL 61109
USA

Customer Service/Order Entry
Tel: +1 800 541 1418
Fax: +1 800 288 7031

Technical Services
Tel: +1 800 477 8326
Fax: +1 800 765 8326
info@powerteam.com

European Headquarters
Albert Thijsstraat 12
6471 WX Eygelshoven
The Netherlands
Tel: +31 45 567 8877
Fax: +31 45 567 8878

infoeurope@powerteam.com

Asia Pacific Headquarters
26 Soon Lee Road
Singapore 628086
Singapore
Tel: +65 6265 3343
Fax: +65 6265 6646
infoasia@powerteam.com

Shanghai, China
No. 1568 Hua Shan Road
Treasury Building
11th Floor
Shanghai 200052, China
Tel: +86 21 2208 5888
Fax: +86 21 2208 5682

infochina@powerteam.com

ENGINEERING, MANUFACTURING AND SUPPORT CENTER

World Headquarters
5885 11th Street
Rockford, IL 61109, USA
Tel: +1 815 874 5556
Fax: +1 800 288 7031

info@powerteam.com

Your Power Team Distributor

© 2014 SPX Hydraulic Technologies PT1403-M

SPX®